

ASTER.c

Recessed Ground/Wall

TYPE:

PROJECT NAME:



ASTER.c

- Housing in die-cast aluminium ENAB46100
- Painted with polyester powders certified Qualicoat® previous treatment of sandblast process and hexavalent chrome free passivation
- Tempered glass diffuser
- Closing screws in stainless steel A4
- Silicone rubber gaskets
- Junction box in polycarbonate V1 (850°C)
- Lamp not included
- IP67, shock resistance IK10
- Class I
- CE omologations

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

ASTER.c

Recessed Ground/Wall

TYPE:

PROJECT NAME:



MODEL #

FINISH

LED COLOR



OPTIC

DRIVER



VOLTAGE

Configuration code
L221061 + .4 + .28

Finishing

-  .1 Anthracite
-  .4 Grey (Ral 9006)






Accessories



-  **L2261** Polystyren volume to lose
-  **L22104** Connector IP68



L221061
Ground






2w 150 lumen 4000°K
CRI 80



IP67   T = 33° 





L221068
Ground






2x2w 2x150 lumen
4000°K CRI 80



IP67   T = 33° 





L221115
Ground






3x2w 3x150 lumen
4000°K CRI 80



IP67   T = 33° 





L221074
Ground

4x2w 4x150 lumen
4000°K CRI 80

IP67   T = 33° 





SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

ASTER.s

Recessed Ground LED

TYPE:

PROJECT NAME:

L22.1061

MODEL #



FINISH

LED COLOR



OPTIC

DRIVER

VOLTAGE

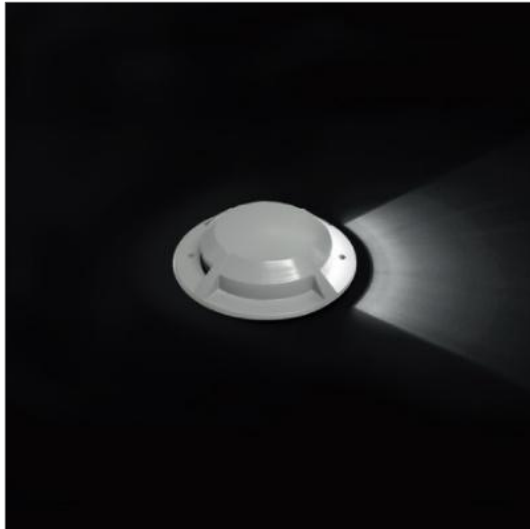

VISTA LATERALE - SIDE VIEW

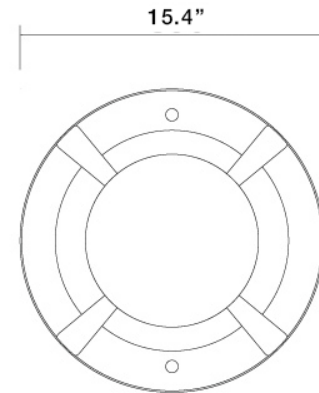

SPECIFICATION SHEET

Housing:

Housing in die-cast aluminium ENAB46100

Diffuser:

Transparent tempered glass diffuser

Closing screws:

Screws in stainless steel A4

Rubber gasket:

Silicone rubber gaskets

Junction box:

Junction box in polycarbonate V1 (850°C).

Cable blocker:

Junction box in polycarbonate V1 (850°C).

Wiring:

Brass cable blocker IP68 for cable Ø7-10mm.

Installation:

Recessed in the ground

Weight:

2.50 Kg

Finish:

.1 anthracite, .4 grey aluminium

Accessories:

L22.61 polystyrene volume to lose, L22.104 connector IP68.

LED Driver Voltage Option:

120 - 277V

SOURCE DESCRIPTION

LED Options:

.27 4000°K .28 3000°K. .29 6000°
K. .31 beam 10°

CRI:

CRI 85

Rated luminous flux:

Lighting flow: 80 lumen. Total
absorbed power3w.

CERTIFICATIONS

Normative:

EN60598 and relative

specifications **Certification:**

ETL

Protection Class:

IP67-IP10 max load 2500 Kg

SPECIFICATION SHEET

LEDOLOGY

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

ASTER.s

Recessed Ground LED

TYPE:

PROJECT NAME:

L22.1068

MODEL #



FINISH

LED COLOR

OPTIC

DRIVER

VOLTAGE

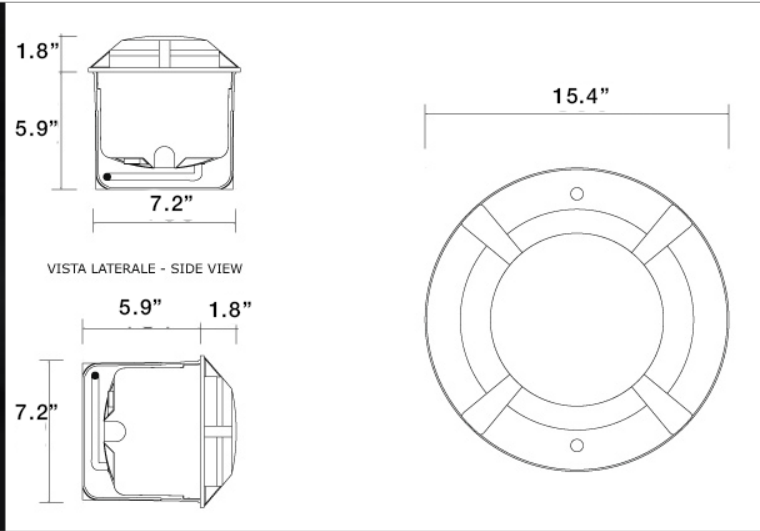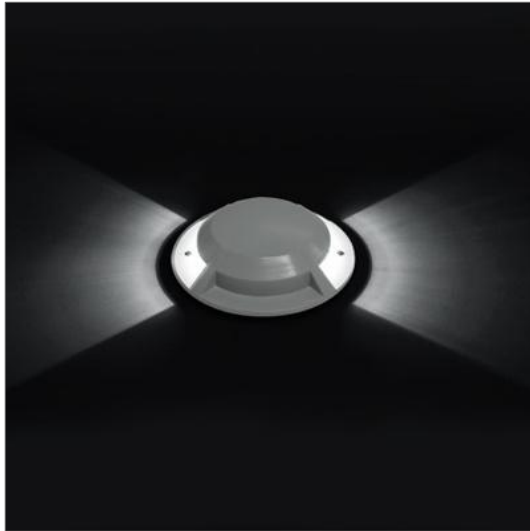

SPECIFICATION SHEET

Housing:

Housing in die-cast aluminium ENAB46100

Diffuser:

Transparent tempered glass diffuser

Closing screws:

Screws in stainless steel A4

Rubber gasket:

Silicone rubber gaskets

Junction box:

Junction box in polycarbonate V1 (850°C).

Cable blocker:

Junction box in polycarbonate V1 (850°C).

Wiring:

Brass cable blocker IP68 for cable Ø7-10mm.

Installation:

Recessed in the ground

Weight:

2.50 Kg

Finish:

.1 anthracite, .4 grey aluminium

Accessories:

L22.61 polystyrene volume to lose, L22.104 connector IP68.

LED Driver Voltage Option:

120 - 277V

SOURCE DESCRIPTION

LED Options:

.27 4000°K .28 3000°K. .29 6000°K. .31 beam 10°

CRI:

CRI 85

Rated luminous flux:

Lighting flow: 2x80 lumen. Total absorbed power 2x3w.

CERTIFICATIONS

Normative:

EN60598 and relative specifications

Certification:

ETL

Protection Class:

IP67-IK10 max load 2500 Kg

SPECIFICATION SHEET

LEDOLOGY

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

ASTER.s

Recessed Ground LED

TYPE:

PROJECT NAME:

L22.1074

MODEL #



FINISH

LED COLOR



OPTIC

DRIVER

VOLTAGE

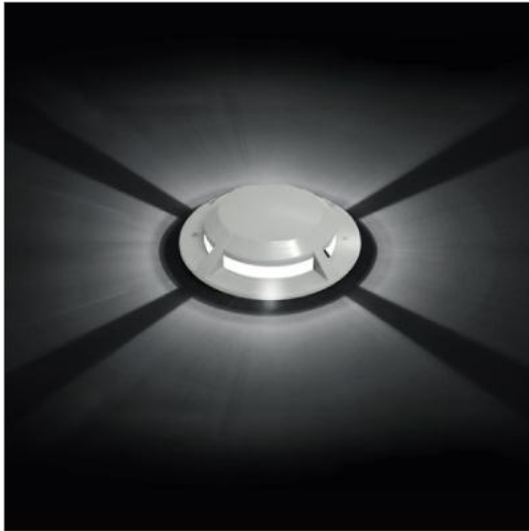

VISTA LATERALE - SIDE VIEW

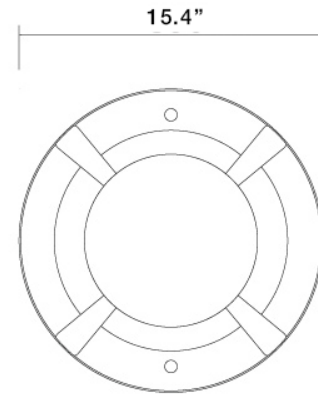

SPECIFICATION SHEET

Housing:

Housing in die-cast aluminium ENAB46100

Diffuser:

Transparent tempered glass diffuser

Closing screws:

Screws in stainless steel A4

Rubber gasket:

Silicone rubber gaskets

Junction box:

Junction box in polycarbonate V1 (850°C).

Cable blocker:

Junction box in polycarbonate V1 (850°C).

Wiring:

Brass cable blocker IP68 for cable \varnothing 7-10mm.

Installation:

Recessed in the ground

Weight:

2.25 Kg

Finish:

.1 anthracite, .4 grey aluminium

Accessories:

L2261 polystyrene volume to lose, L22104 connector IP68.

LED Driver Voltage Option:

120 - 277V

SOURCE DESCRIPTION

Color Temperature:

.27 4000°K .28 3000°K. .29 6000°K. .31 beam 10°

CRI:

CRI 85

Rated luminous flux:

Lighting flow: 4x80 lumen. Total absorbed power 4x3w.

CERTIFICATIONS

Normative:

EN60598 and relative specifications

Certification:

ETL

Protection Class:

IP67-IP10 max load 2500 Kg

SPECIFICATION SHEET

LEDOLOGY

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

ASTER.s

Recessed Ground LED

TYPE:

PROJECT NAME:

L22.1115

MODEL #


FINISH

LED COLOR



OPTIC

DRIVER

VOLTAGE



VISTA LATERALE - SIDE VIEW

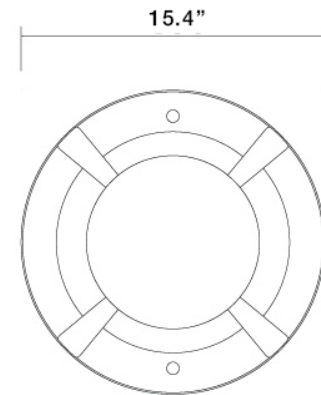

SPECIFICATION SHEET

Housing:

Housing in die-cast aluminium ENAB46100

Diffuser:

Transparent tempered glass diffuser

Closing screws:

Screws in stainless steel A4

Rubber gasket:

Silicone rubber gaskets

Junction box:

Junction box in polycarbonate V1 (850°C).

Cable blocker:

Junction box in polycarbonate V1 (850°C).

Wiring:

Brass cable blocker IP68 for cable Ø7-10mm.

Installation:

Recessed in the ground

Weight:

2.25 Kg

Finish:

.1 anthracite, .4 grey aluminium

Accessories:

L22.61 polystyrene volume to lose, L22.104 connector IP68.

LED Driver Voltage Option:

120 - 277V

SOURCE DESCRIPTION

LED Options:

.27 4000°K .28 3000°K. .29 6000°K. .31 beam 10°

CRI:

CRI 85

Rated luminous flux:

Lighting flow: 3x80 lumen. Total absorbed power 3x3w.

CERTIFICATIONS

Normative:

EN60598 and relative specifications

Certification:

ETL

Protection Class:

IP67-IP10 max load 2500 Kg

SPECIFICATION SHEET

LEDOLOGY

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM