


ATOLLO™ Ø150

INSTALLATION INSTRUCTIONS - CEILING / WALL

TYPE:

PROJECT NAME:

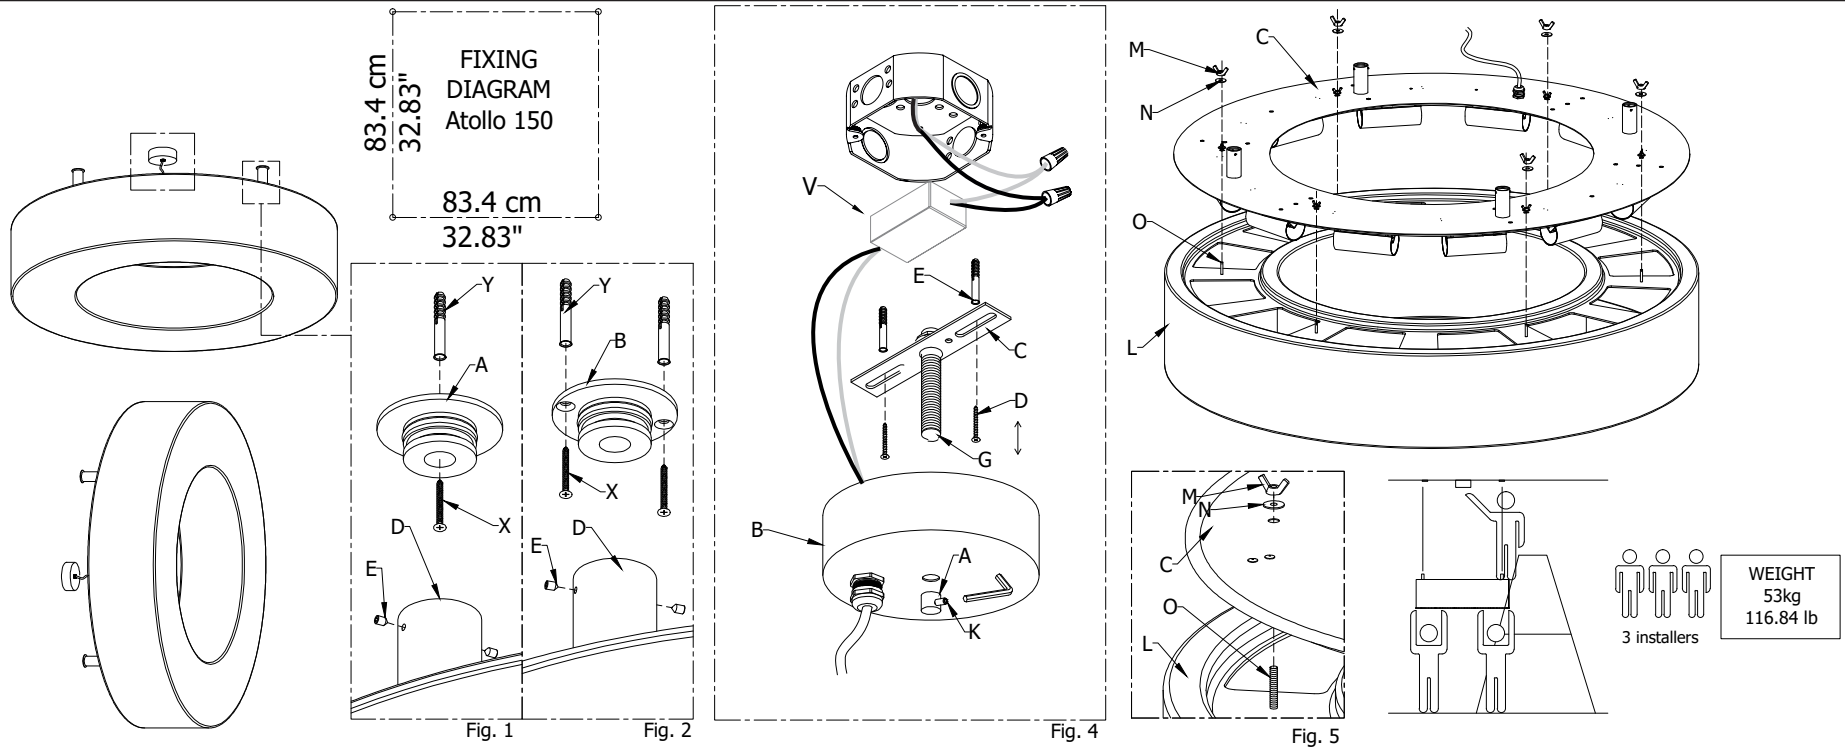

INSTRUCTION

- Switch off the power or pull the plug out.
 - Disconnect the power supply.
 - For the position of the holes to be made, refer to the drilling diagram.
 - Fix the parts (A or B) to the wall / ceiling using the screws (X) and the plugs (Y) (Fig.1-2).
 - Insert the details (D) to the ceiling connections and screw the safety dowels (E) (Fig.1-2).
 - Connect the cables inside the junction box to the driver by following the wiring diagram (V) (Fig. 3 & 4)
 - Screw the frame (C) to the junction box. Place the canopy to the frame. After positioning, carefully screw the detail (A), Screw the safety dowel (K).
 - It is possible to remove the diffuser (L) from the frame (C) by unscrewing the butterflies (M) with the washers (N) to the threaded pins (O) (Fig. 5).
- ATOLLO Ø150 6 supports 6 butterflies for fixing the diffuser.

ATTENTION

The products of our production are suitable for the using in usual surroundings with standard temperature and humidity levels. All the operations have to be done by a technician.


CLEANING

Switch off the power or pull the plug out.

For the periodical cleaning of the lamp use always gloves and a soft cloth (for glossy surfaces) or a feather duster for the lampshade in fabric or pleated fabric. Don't use aggressive solvents or alcohol. Avoid absolutely to fold parts which are not expected for folding, in this case welded parts are going to be damaged.

WIRING DIAGRAM


DIMMING 120V ONLY
TRIAC / ELV (LTE)

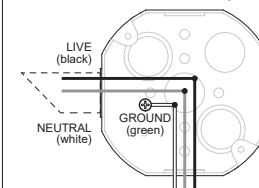

FIXTURE CABLES

WIRING DIAGRAM

DIMMING 120-277V
0-10V (D10)

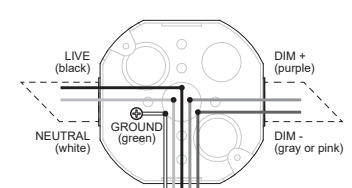

FIXTURE CABLES

*Junction box for reference only

Fig. 3