

BRITE UP/DOWN

LED OUTDOOR RATED

TYPE:

PROJECT NAME:



MODEL #	WATT	LED	OPTICS	FINISH	VOLTAGE
---------	------	-----	--------	--------	---------


DESCRIPTION:

Drive over outdoor axial spotlight with IP67 rating. AISI 316L steel ferrule and high protection rating, even in the RGB version, enable installation without draining. Provided wired with a 1.5 m cable.

INSTALLATION NOTE:


Must be wired in series when two or more are wired together with same driver.

SPOT LIGHT

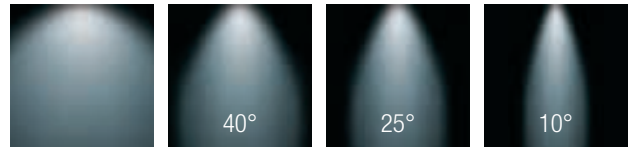


BRITE UP/DOWN Dimensions

L5CB20

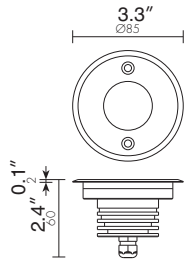

L5CB21

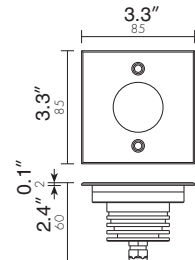

CE LED TEC III F IP68 (RGB IP67) 1000 072x120

LED COLORS

- ☐ 0. 5000K WHITE
- ☐ 1. BLUE
- ☐ 2. GREEN
- ☐ 3. RED
- ☐ 5. 3000K WHITE
- ☐ 6. RGB

FINISH ☐ I. STAINLESS STEEL



WATTAGE ☐ 3W ☐ 6W

VOLTAGE ☐ 120V ☐ 220V ☐ 277V

OPTICS

- ☐ L. 40°
- ☐ M. 25°
- ☐ S. 10°
- ☐ D. DIFFUSED BEAM

SPECIFICATION SHEET

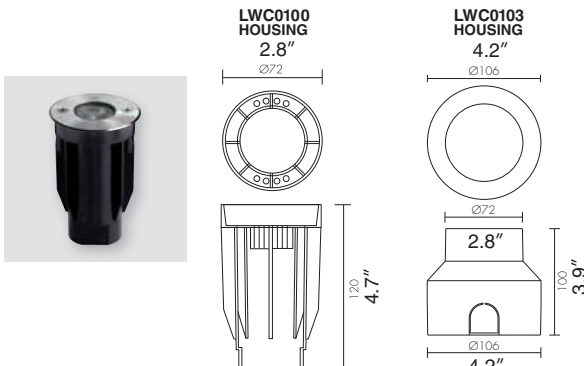

LEDOLOGY®

A Luminart® BRAND

WWW.LUMINARTLIGHTING.COM

BRITE UP/DOWN

LED OUTDOOR RATED

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM