
TYPE:

PROJECT NAME:

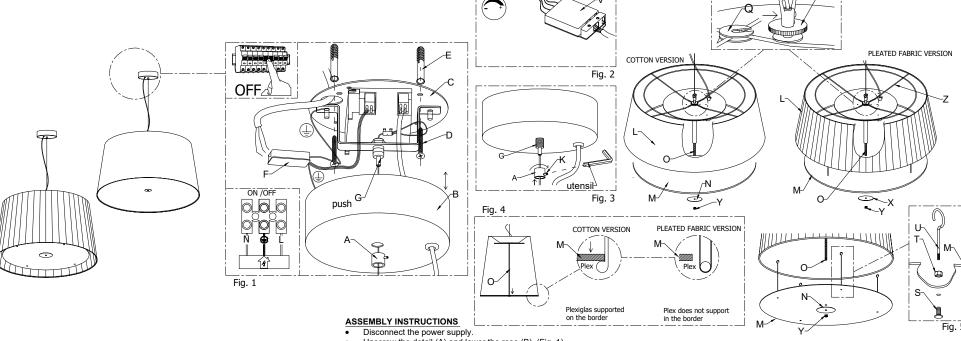

- Unscrew the detail (A) and lower the rose (B). (Fig. 1)
- Fasten the disk (C) to the ceiling using the screws (D) and the anchors (E). (Fig. 1)
- Adjust the length of the steel cable by pressing on the cable clamp (G). (Fig. 1)
- Connect the network cables to the terminal (F) respecting the polarity. (Fig.1)
- Dimmable version connect the cables inside the box (V), (Fig.2)
- DIMMABLE CONNECTION DIAGRAM see attached sheet
- Adjust the voltage of the electric cable, making sure that the cable remains soft.
- Place the canopy on the ceiling. After positioning, carefully screw the detail (A) to the cable clamp (G). (FIG. 3).
- Screw the safety dowel (K) (Fig. 3)

COTTON VERSION: plex positioning

- Position the closing plex (M) inserting it inside the lampshade (L) and then resting it by falling on the edge. (Fig. 4)
- Insert the washer (N) and screw the particular (Y) to the tube (O). (Fig. 4)

PLISSE 'VERSION: plex positioning

- Insert the parts (S) in the holes of the closing plex (M) and screw the nuts (T), then screw the rods (U) to the detail (S) (Fig.5).
- Position the closing plex (M) by hooking the rods (U) to the frame of the lampshade (Z), making sure that the threaded tube (O) enters the central hole of the plex.
- Screw the particolar (Y) and the washer (N) to the threaded tube (O).
- It is possible to disassemble the lampshade by unscrewing the ring nut (P) and extracting it from the frame (Q) (Fig. 6).

CAUTION


Our appliances are suitable for use in ordinary environments with standard relative humidity ambient temperature. All operations must be carried out by a specialized technician.

CLEANING

Disconnect the power supply or the plug from the socket.

For periodic cleaning of lighting fixtures always use gloves and a soft cloth (in the case of smooth surfaces) or a type duvet with handle for finishing in fabric or pleated. Never use solvents or alcohol.

Absolutely avoid bending parts not intended for their mobility, as this could weaken or break them.



WEIGHT 14 kg 30.86 lb