
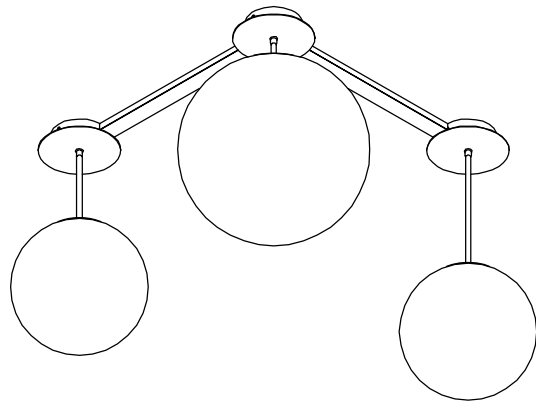


INSTRUCTIONS

- Ensure power supply is disconnected or turned off before proceeding.
- Install main junction box and connect to power lines.
- Using a pencil, mark the positions of secondary junction boxes (see page 2 for measurements).
- Install all secondary junction boxes at the positions marked. Tighten crossbar, canopy, and wire housing with Philips screws on all junction boxes (Fig. 1).
- Follow instructions on page 3 to assemble the fixtures.
- Connect network cables (F) to fixtures and junction boxes as shown in (Fig. 1).
- Route cables (F) through U-channels (C) and affix U-channels to canopy (H) with the attached magnets (G) as shown in (Fig. 2) and (Fig. 3).

PAGE 2: CANOPY INSTALLATION INSTRUCTIONS

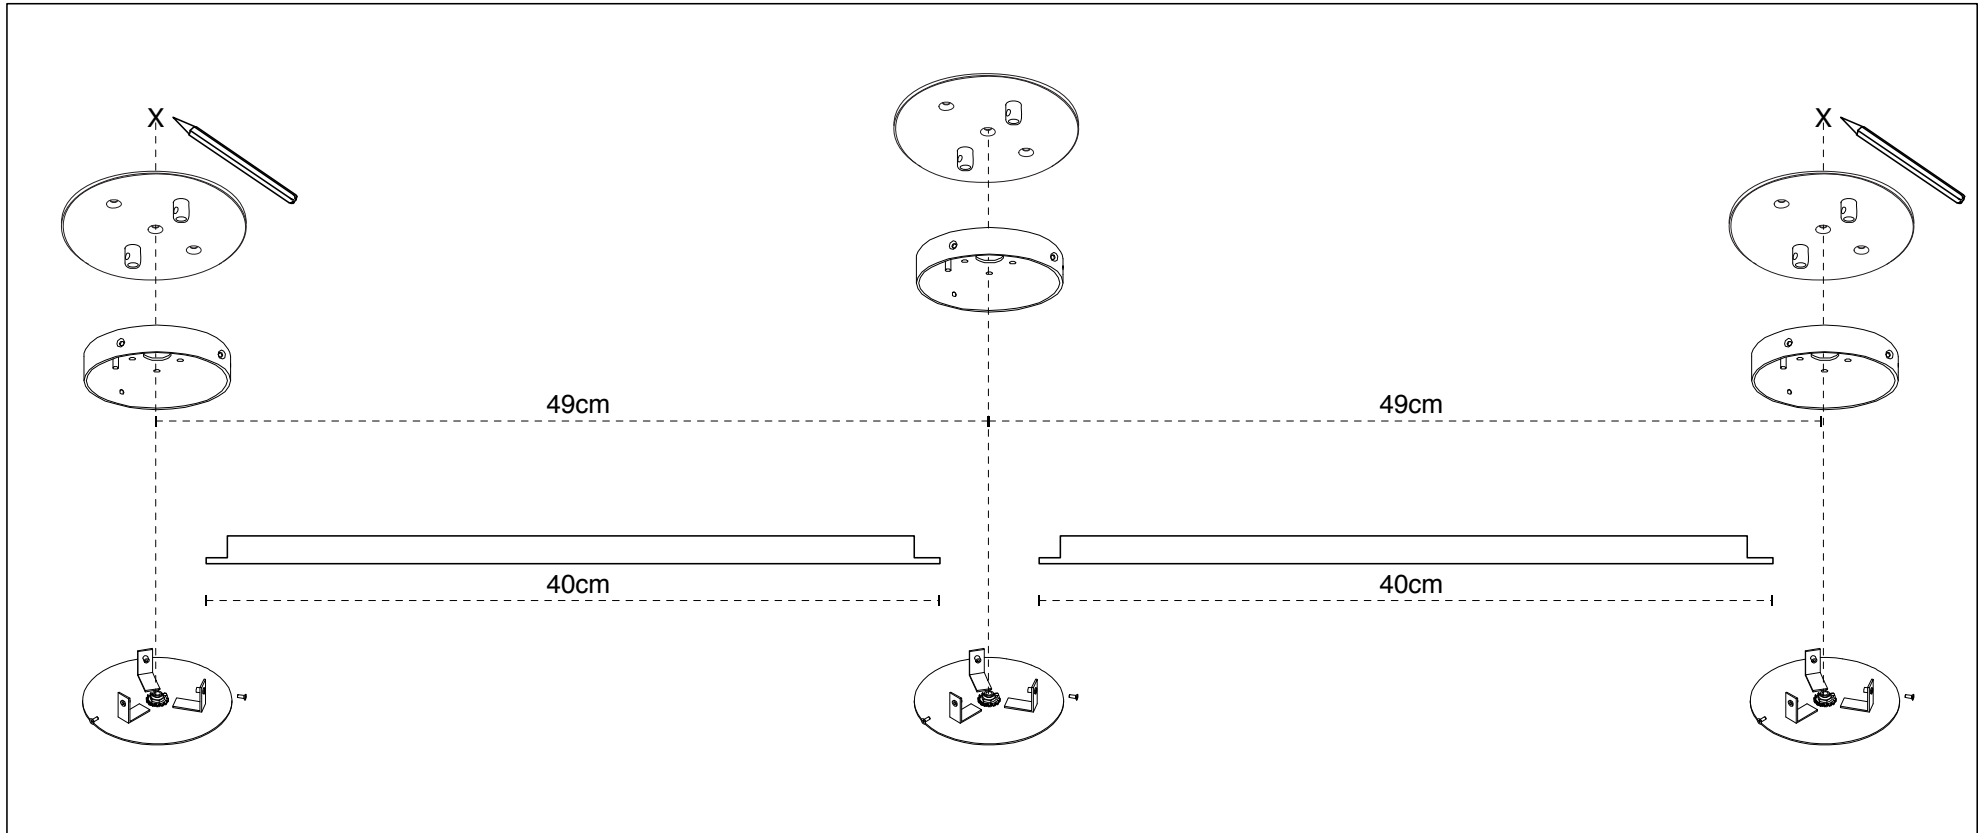

INSTRUCTIONS

- Ensure main junction box and first canopy is installed.
- From the center point of the first canopy, measure 49cm in desired direction and mark ceiling. The marked point will be the center point of the next canopy.
- Repeat as desired for additional canopies. Make sure they are 49cm apart from center to center.

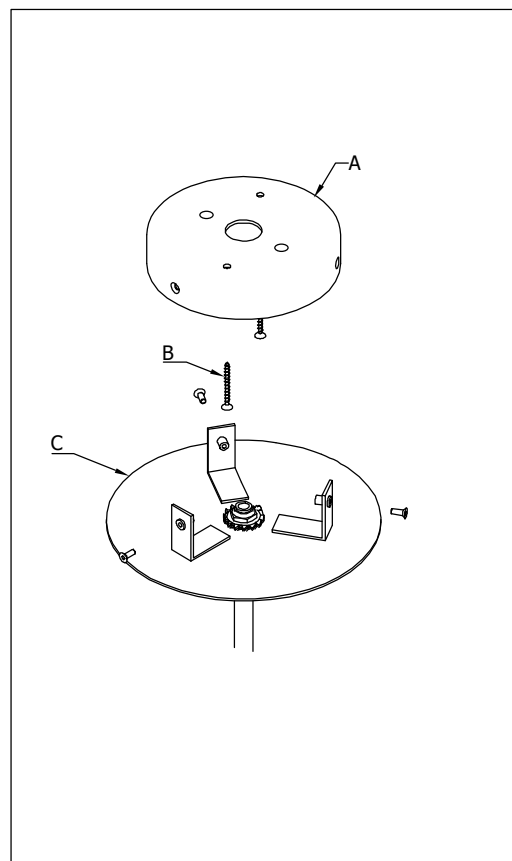
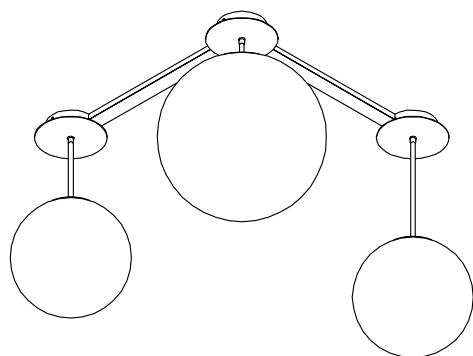


Fig. 1

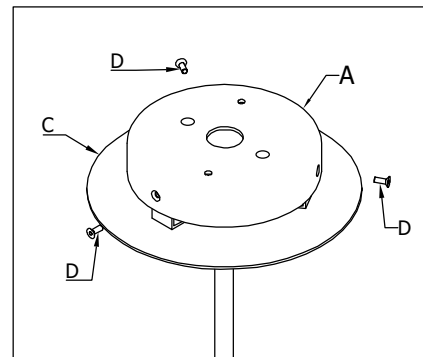


Fig. 2

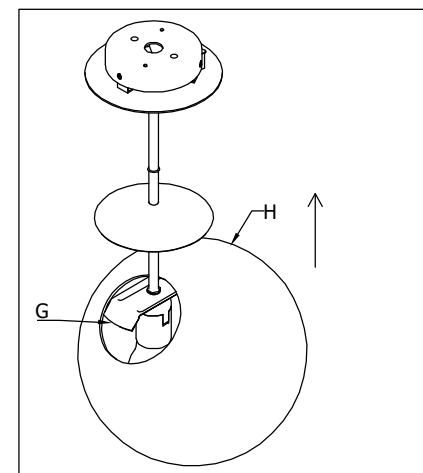


Fig. 4

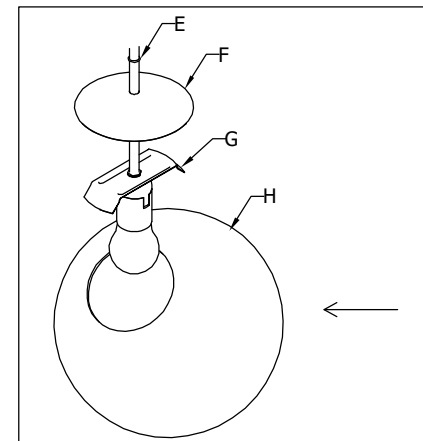


Fig. 3

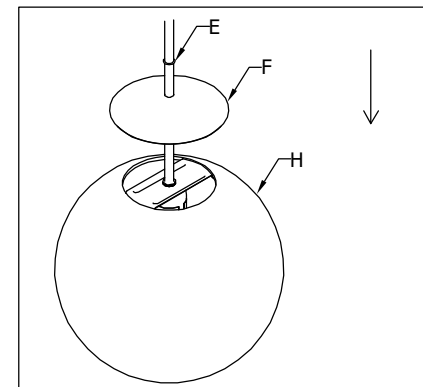


Fig. 5

INSTRUCTIONS

- Proceed with fixture assembly only after junction boxes have been installed and wired. (Fig. 1) shows the wire housing (A), canopy plate (C) and Philips screws (B).
- Fix the canopy plate (C) on the wire housing (A) using screws (D) (Fig. 2).
- Screw the light bulb in the lamp socket.
- Move up the o-ring (E) and the cover (F) (Fig. 3).
- Insert the light bulb, the lamp socket and the bracket (G) into the ball (H) (Fig. 4).
- Align the ball (H) to the structure, center the ball on the bracket (G); move down the cover (F) and fix with the o-ring (E) (Fig. 5).

ATTENTION


The products of our production are suitable for use in usual surroundings with standard temperature and humidity levels. All the operations must be done by a technician.

CLEANING

Switch off the power or pull the plug out.

For the periodical cleaning of the lamp use always gloves and a soft cloth (for glossy surfaces) or a feather duster for the lampshade in fabric or pleated fabric. Don't use aggressive solvents or alcohol.

MULTIBALL ϕ 25
MULTIBALL ϕ 30
MULTIBALL ϕ 35
MULTIBALL ϕ 40
MULTIBALL ϕ 45



1 x 6W E26 LED
1 x 6W E26 LED
1 x 11W E26 LED
1 x 11W E26 LED
1 x 11W E26 LED