


# RINGER

SP. 50 Direct LED

TYPE:

PROJECT NAME:

MODEL #	FINISH	LED COLOR	OPTIC	DRIVER	VOLTAGE
---------	--------	-----------	-------	--------	---------

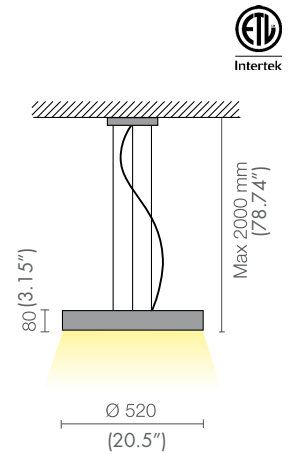

L258691.30		LED	30W	3000K	2900lm	700mA	CRI>80	A+		148/412
L258691.40		LED	30W	4000K	3300lm	700mA	CRI>80	A+		
L258691.30/DIMM2		LED	30W	3000K	2900lm	700mA	CRI>80	A+		148/412
L258691.40/DIMM2		LED	30W	4000K	3300lm	700mA	CRI>80	A+		

Hanging lamp for direct light with a high efficiency LED module, made from epoxy powder coated finish aluminium stabilized with UV rays. Super pure 99.9% aluminium reflector with a metallic or painted finish. The light source is positioned to provide discreet and effective light without glare. The unit includes driver. Provided with galvanised steel suspension cables (1.2 mm) with quick adjust regulators, 200 cm of three-wire electrical cable 3x1 mm<sup>2</sup> and a painted steel ceiling attachment. The degree of protection against the penetration of dust, solid objects and liquids is IP20.

SPECIFICATION SHEET

- 08 Bianco satinato RAL 9003  
Frosted white RAL 9003
- 22 Grigio RAL 9006  
Grey RAL 9006

Included: driver  
EM = Emergency autonomy 1 hour  
DIMM2 = Digital dimmable  
Photobiological risk group 0  
in compliance with Standard EN 62471

VOLTAGE  120V  220V  277V

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM