


RINGER

SP. 50 Direct Indirect LED

TYPE:

PROJECT NAME:

MODEL #	FINISH	LED COLOR	OPTIC	DRIVER	VOLTAGE
---------	--------	-----------	-------	--------	---------

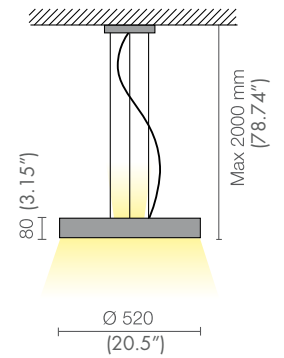

L258692.30 LED 50W 3000K 2900+1500lm 700mA CRI>80 A 336/415

L258692.40 LED 50W 4000K 3300+1550lm 700mA CRI>80 A

SPECIFICATION SHEET Double light hanging fixture complete with a high efficiency LED module, made from epoxy powder coated finish aluminium stabilized with UV rays. Super pure 99.9% aluminium reflector with a metallic or painted finish. The light source is positioned to provide discreet and effective light without glare. The unit includes driver. Provided with galvanised steel suspension cables (1.2 mm) with quick adjust regulators, 200 cm of four-wire electrical cable 4x0.75 mm² and a painted steel ceiling attachment. The degree of protection against the penetration of dust, solid objects and liquids is IP20.

08 Bianco satinato RAL 9003
Frosted white RAL 9003

22 Grigio RAL 9006
Grey RAL 9006

Included: driver.
Photobiological risk group 1,
in compliance with Standard EN 62471

VOLTAGE 120V 220V 277V

LEDOLOGY[®]

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM


RINGER

SP. 40 Direct LED

TYPE:

PROJECT NAME:

MODEL #	FINISH	LED COLOR	OPTIC	DRIVER	VOLTAGE
---------	--------	-----------	-------	--------	---------

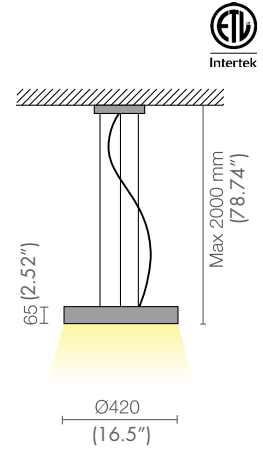

L258689.30		LED	20W	3000K	2000lm	700mA	CRI>80	A+		147/412
L258689.40		LED	20W	4000K	2200lm	700mA	CRI>80	A+		
L258689.30/DIMM2		LED	20W	3000K	2000lm	700mA	CRI>80	A+		147/412
L258689.40/DIMM2		LED	20W	4000K	2200lm	700mA	CRI>80	A+		

Hanging lamp for direct light with a high efficiency LED module, made from epoxy powder coated finish aluminium stabilized with UV rays. Super pure 99.9% aluminium reflector with a metallic or painted finish. The light source is positioned to provide discreet and effective light without glare. The unit includes driver. Provided with galvanised steel suspension cables (1.2 mm) with quick adjust regulators, 200 cm of three-wire electrical cable 3x1 mm² and a painted steel ceiling attachment. The degree of protection against the penetration of dust, solid objects and liquids is IP20.

SPECIFICATION SHEET

- 08  Bianco satinato RAL 9003
Frosted white RAL 9003
- 22  Grigio RAL 9006
Grey RAL 9006

Included: driver
EM = Emergency autonomy 1 hour
DIMM2 = Digital dimmable
Photobiological risk group 0
in compliance with Standard EN 62471

VOLTAGE 120V 220V 277V

LEDOLOGY[®]

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM