


POP™ Y3 GLASS

RECESSED

TYPE:


PROJECT NAME:

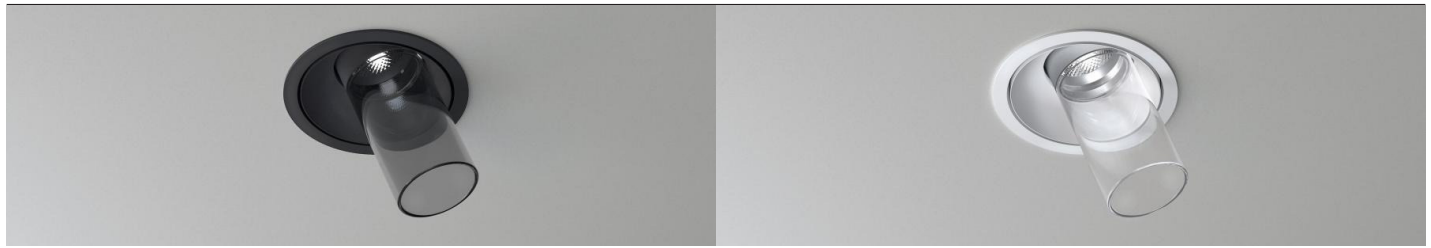

POP EY3 11W

IP40	MC-E=3
350m/A	LED 11W CRI>90
L173EY3.3	<input type="checkbox"/>
L174EY3.3	<input type="checkbox"/>
With honeycomb	

Led color	Nominal lm	Beam spread
2 = 2700°K	1195	S = 22°
3 = 3000°K	1257	T = 12°
4 = 4000°K	1313	




Pop EY3		P
3EY3.3	led IP40	3.7"
4EY3.3	led IP40 + honeycomb	3.89"

	Frame	Glass
02F	Black <input type="radio"/>	Smoked <input type="radio"/>
06T	White <input type="radio"/>	Transparent <input type="radio"/>

POP FY3 8W

IP40	MC-E=3
250m/A	LED 8W CRI>90
L173FY3.3	<input type="checkbox"/>
L174FY3.3	<input type="checkbox"/>
With honeycomb	

Led color	Nominal lm	Beam spread
2 = 2700°K	779	S = 22°
3 = 3000°K	879	T = 12°
4 = 4000°K	855	

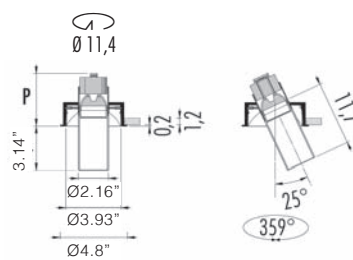

Pop FY3		P
3FY3.3	led IP40	3.81"
4FY3.3	led IP40 + honeycomb	4.01"

	Frame	Glass
02F	Black <input type="radio"/>	Smoked <input type="radio"/>
06T	White <input type="radio"/>	Transparent <input type="radio"/>

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Finish	LED	Remote Driver Options
	<input type="radio"/> 02F Black + Smoked Glass	<input type="radio"/> 2700K	<input type="radio"/> 120V Phase Dimming
	<input type="radio"/> 06T White + Transparent Glass	<input type="radio"/> 3000K	<input type="radio"/> 120V 0-10V Dimming
	<input type="radio"/> C1F Copper + Smoked Glass	<input type="radio"/> 4000K	<input type="radio"/> 277V 0-10V Dimming
	<input type="radio"/> S1C Brass + Champagne Glass		

