

Fig. 1

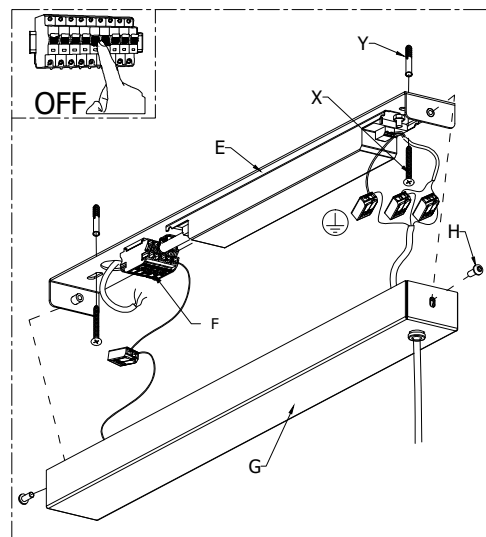


Fig. 2

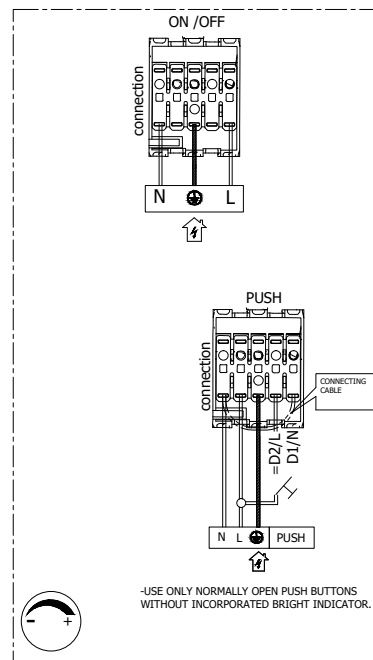


Fig. 2a

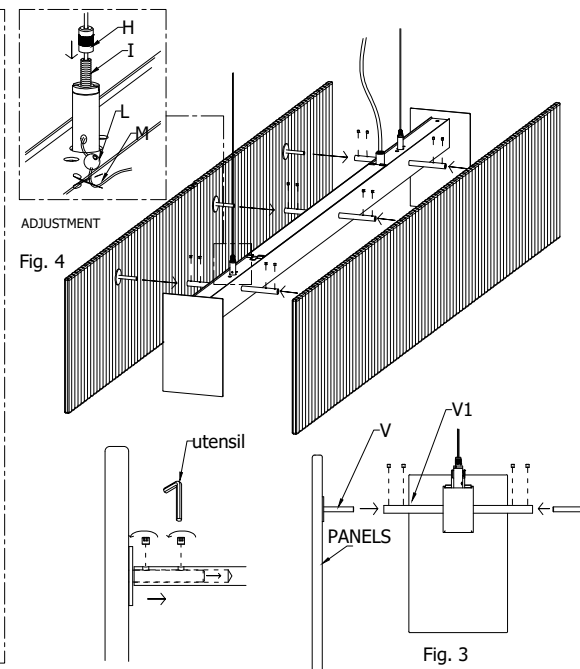


Fig. 4

Fig. 3

### INSTRUCTION

- Switch off the power or pull the plug out.
- Fix the details (A) to the ceiling with the appropriate screws (X) and plugs (Y), and screw the part (D) (Fig. 1).
- Pull the network cable through the center hole of the support (E) and fix on the ceiling the support with the screws (X) and the dowels (Y) (Fig. 2).
- Connect the network cable on the clamp (F) according to the polarity. (Fig. 2).
- DIAGRAM OF CONNECTIONS see fig. (Fig. 2a).
- Lift up the ceiling rose (G) until it completely lean against the ceiling; screw the detail (H) (Fig. 2).
- Fix the side panels, inserting the pins (V) into the details (V1), and close the grains (S) (Fig. 3).
- Adjust the length of the steel cable, loosen the screw of the safety cable clamp (L), unscrew the detail (H) adjust the steel cable (M) keeping the particular (I) pressed and close the part (H). Reposition the safety cable clamp (L) and tighten the screws. Cut off the excess cord. (Fig 4).

### ATTENTION

The products of our production are suitable for the using in usual surroundings with standard temperature and humidity levels. All the operations have to be done with the power off.

### CLEANING

Switch off the power or pull the plug out.

For the periodical cleaning of the lamp use always gloves and a soft cloth. Use spray for glasses or all-purpose. Avoid absolutely to fold parts which are not expected for folding, in this case welded parts are going to be damaged.