

# CANTHARELLUS™


INSTALLATION INSTRUCTIONS


**TYPE:**


**PROJECT NAME:**

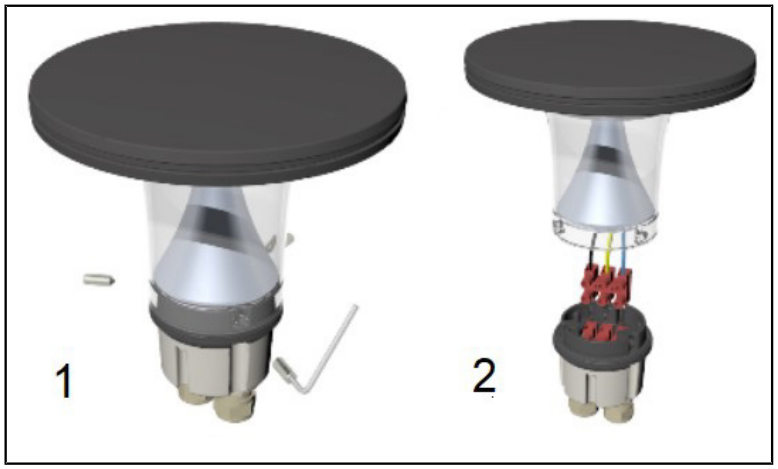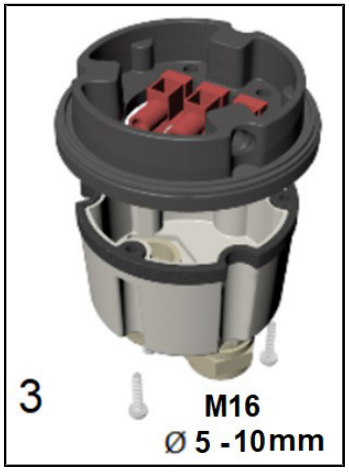


INSTALLATION SHEET

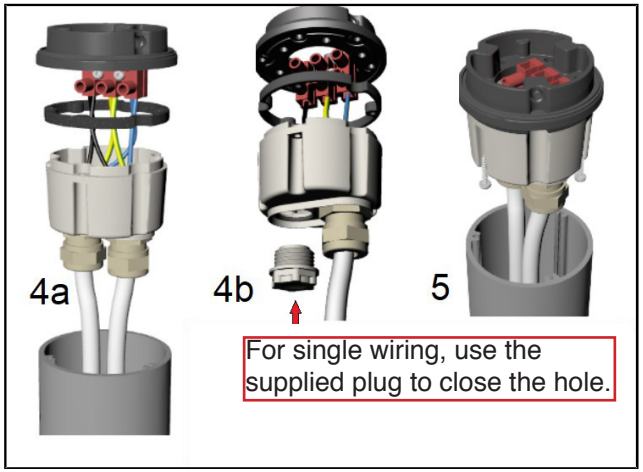E product contains an energy efficiency class E light source.

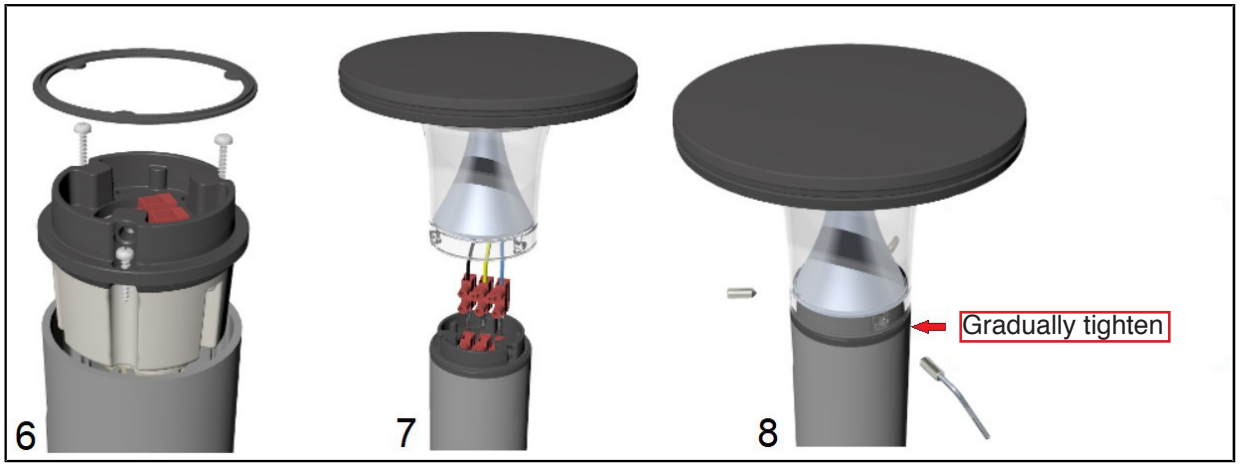
# CANTHARELLUS™

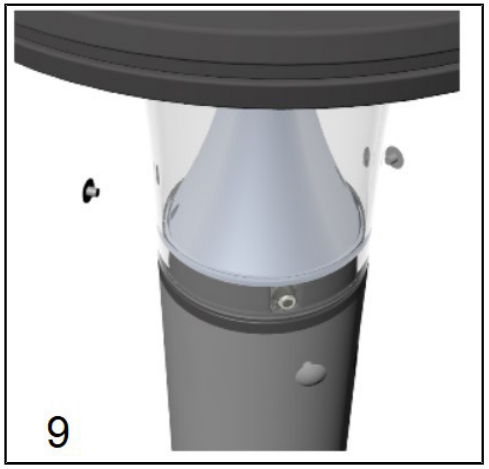INSTALLATION INSTRUCTIONS - WIRING INSTRUCTIONS

**TYPE:**


**PROJECT NAME:**

MAKE THE NECESSARY WIRE CONNECTIONS USING (1) WATERTIGHT TWIST CONNECTORS OR A (2) WATERTIGHT CONNECTOR.

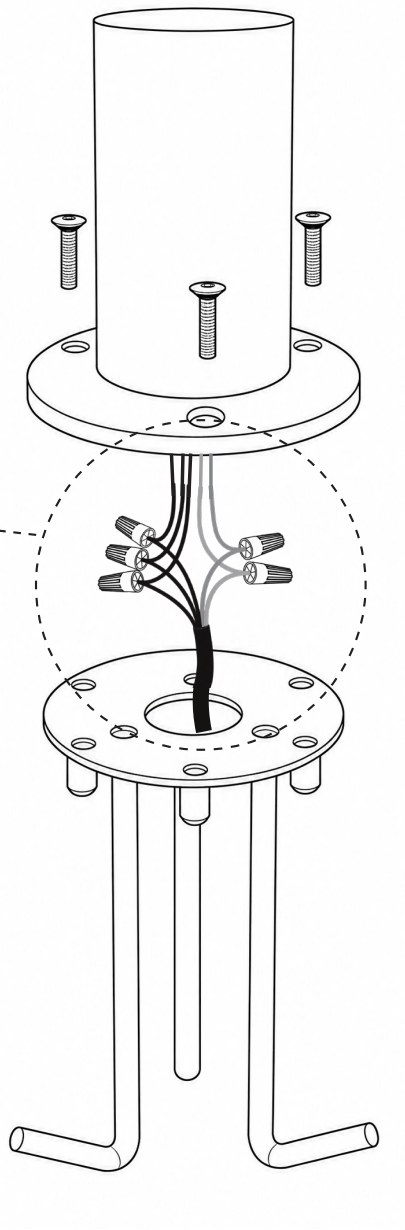

**OPTION 1**

WATERTIGHT TWIST CONNECTOR

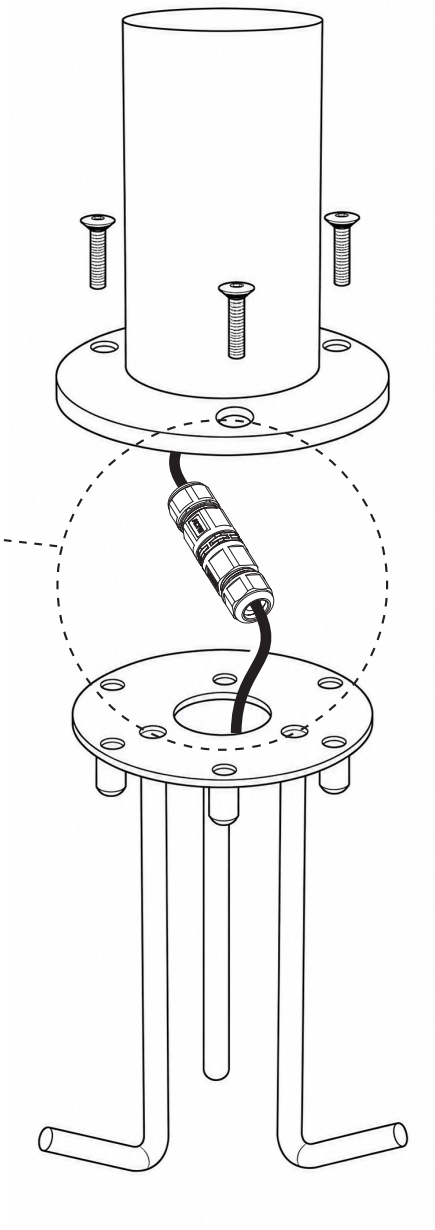


**OPTION 2**

WATERTIGHT CONNECTOR

## WIRING DIAGRAM


DIMMING
0-10V (D01 / D10)
120-277V

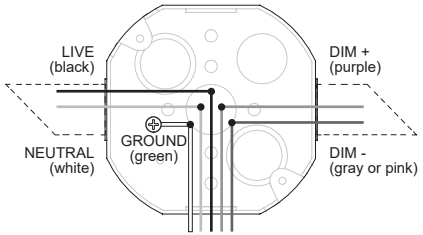


FIXTURE CABLES

## WIRING DIAGRAM

DIMMING 120V ONLY
TRIAC/ELV (LTE) or TRIAC (D3)




FIXTURE CABLES

INSTALLATION SHEET

# CANTHARELLUS™

INSTALLATION INSTRUCTIONS

**TYPE:**

**PROJECT NAME:**

## WARNINGS

The installation and maintenance operations must be executed with the power supply removed, by qualified operators in compliance with the national safety rules.

Clean the appliance regularly but avoiding the use of pressure cleaners, abrasive brushes or sponges that can scratch the surface paint layer. For the same reason avoid using solvent-based detergents in favour of a soft cloth and a neutral pH detergent.

Using the device in a saline environment with high humidity requires at least a monthly cleaning.

If the installation site is especially subjected to overvoltage events, we recommend the use of additional overvoltage protections (Surge Protection Device).

The IP rating of the electrical connections must be equal to or higher than the device IP rating.

Avoid to cause damage to the paint during the installation or the maintenance due to the onset of corrosive phenomena. For the same reason, do not use tools near the lamp such as lawn mowers or brush cutters.

To prevent corrosive phenomena, avoid that metal parts come into contact with the ground and / or are exposed to products such as fertilizers, pesticides, solvents, salt, etc.

**Installation by means of plate with anchoring set cod. 5519 (Recommended installation). (A)**

Prepare a concrete casting to house the plate with anchoring set. Screw the base support to the plate, using the screws supplied.

**Direct fixing to the ground. (B)**

Fix the base plate to the ground through the three pre-drilled holes, using
Fischer-type metal anchors.


**WARNINGS**

**1.** Make sure the pole has adequate drainage inside.

**2.** Clean the appliance regularly but avoiding the use of pressure cleaners, abrasive brushes or sponges that can scratch the surface paint layer. For the same reason, do not use tools near the lamp such as lawn mowers or brush cutters.

**3.** The luminaire must not permanently have contact with aggressive media. To prevent any corrosion problems, no metallic parts of the appliance must be in contact with the ground and/or exposed to aggressive chemical products such as fertilisers, weed killers, manure, salt, cement, solvents, de-icing agents, etc.

**A** 3421 + 5519
3422 + 5519
3423 + 5519

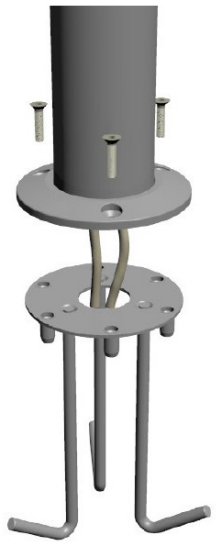

**B**

