

MINIBRITE

OUTDOOR RECESSED LED

TYPE:

PROJECT NAME:

Minibrite 1.0

CE LED TPC IP68 kg 500 kg 0,20 IK 07

Ø 30x70 mm



0,5W 12Vac - 0,6W 12Vdc - 1,2W 24Vdc

L5MB1000 Stainless Steel

LED COLOUR OPTIC
0 - Cool White 5000K **D** - Diffused
5 - Warm White 3000K
9 - Natural White 4000K
F - Warm White 2700K



TECHNICAL DATA

Application Ideal for pathways and marker lighting
Installation Outdoor recessed spotlights; recessed floor spotlights
Mounting With outer casing L5WC0201; spring-loaded ferrule accessory L5WG0300 for installation on panels, plasterboard
Material Body and ferrule in Stainless Steel AISI316L, outer ferrule thickness 1.5mm, tempered glass
Finishes available Stainless Steel
N° and type of LED 3 mid power LEDs
Nom. power consumption 0,5W; 0,6W; 1,2W

Power supply 12/24 Vdc; 12 Vac
Power supply unit Not included
Connection In parallel; wired with a 1.5m neoprene cable
Total Delivered Lumens 20 lm (3000K)
Optics Diffused
LED colour White: Warm White (2700K); Warm White (3000K); Natural White (4000K); Cool White (5000K)
IP 68
IK 07
UGR -

POWER SUPPLY UNIT

	N° MAX FIXTURES	PSU	IP	Page
0,6W - 12Vdc	1...n	12 Vdc	20	479
1,2W - 24Vdc	1...n	24 Vdc	20	479


OUTER CASINGS




ACCESSORIES



CABLES

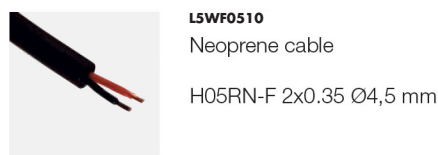

PHOTOMETRIC CURVES

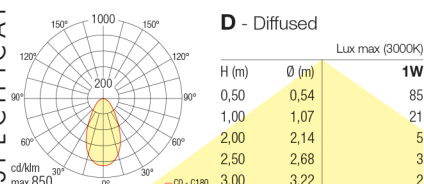

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart®** BRAND

WWW.LUMINARTLIGHTING.COM



LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM