

# OVVIO LED

**TYPE:**

**PROJECT NAME:**



## **DESCRIPTION**

OVVIO LED is the perfect fusion of performance, versatility and clean minimal design, all in a single product. State-of-the-art LED technology ensures optimum performance, longevity and low energy demand.

The product can be installed individually, or in long continuous lines.

When used with accessories Ovvio can be installed as a pendant fixture, or directly to the surface of a wall or ceiling, and as recessed mounted using the first-fix frames. Pendant versions can be height adjusted using the clutch operated wire suspensions and all products come through wired as standard.

## SPECIFICATIONS

350mA integrated Driver  
Colour temperature: 3000K/4000K  
High efficiency LED modules CRI>80  
Mac Adams 3  
Life Time 50.000 h - 5 years complete warranty  
Eye safety: risk-free (RG 0) in accordance with EN62471:2009



**Design**  
Esse-ci

## FLUX MAINTENANCE

CURRENT	L90/B10	L90/B50	L80/B10	L80/B50	L70/B10	L70/B50*
350mA	12.000h	18.000h	26.000h	39.000h	42.000h	> 60.000h

\* E.g. L70 = guaranteed luminous flux of the entire luminaire 70%  
B50 = 50% of the diodes may have a flux reduction below 70%

## OPTICS

PMMA diffuser for a soft emission with no shadow evident.

## BODY

Body in extruded aluminum with epoxy powder coating.

## LEGAL REFERENCES

Conforms to safety standards EN 60598-1, IEC EN 60 598-1 and lighting for working places UNI EN 12464-1.

## CERTIFICATIONS



ErP class: **A<sup>++</sup>**

## COLOURS

White RAL 9003 - Code: B  
Aluminum grey - Code: C6

SUSPENDED  
CEILING



RECESSED



WALL  
FLOOR




## ON REQUEST

- Wiring DALI dimmable - Code: RDD (verify the version available)
- Wiring DIM2mains dimmable - Code: DDM (verify the version available)
- Colour Temperature 5000K
- CRI>90 Premium Version (available for HP version)


# OVVIO LED PG LOW POWER


## OPTIC


PMMA diffuser for a soft emission with no shadow evident.

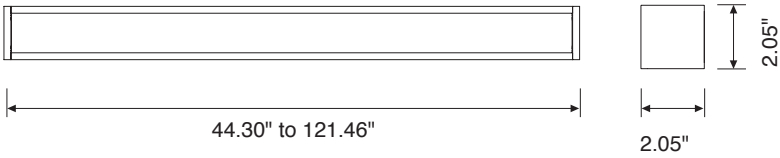

IP 40 **A++**

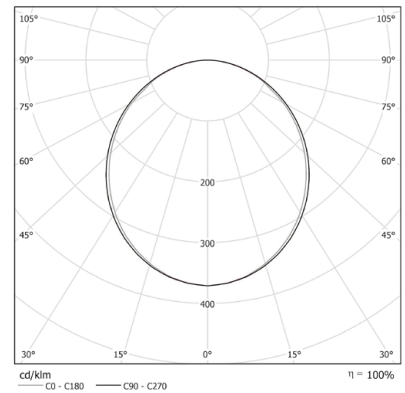


CODE		lm	inches
L1271PG24L4	24W 4000K	2352	44.29
L1271PG30L4	30W 4000K	2940	41.14
L1271PG36L4	36W 4000K	3528	66.34
L1271PG60L4	60W 4000K	5508	110.43
L1271PG66L4	66W 4000K	6468	121.46

CODE		lm	inches
L1271PG24L3	24W 3000K	2256	44.29
L1271PG30L3	30W 3000K	2820	41.14
L1271PG36L3	36W 3000K	3384	66.34
L1271PG60L3	60W 3000K	5640	110.43
L1271PG66L3	66W 3000K	6204	121.46


# OVVIO LED PG HIGH POWER

## OPTIC

PMMA diffuser for a soft emission with no shadow evident.

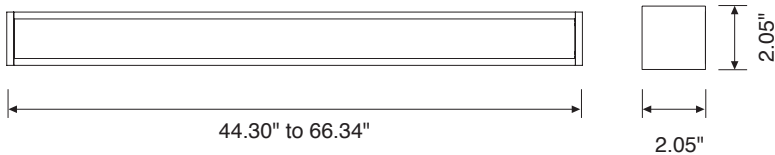

IP 40 **A++**

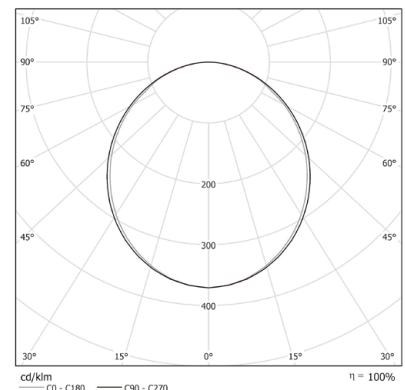

CODE		W	lm	inches
L1271PG48L4HP	48W 4000K	4752	44.29	
L1271PG60L4HP	60W 4000K	5940	55.31	
L1271PG72L4HP	72W 4000K	7128	66.34	

CODE		W	lm	inches
L1271PG48L3HP	48W 3000K	4560	44.29	
L1271PG60L3HP	60W 3000K	5700	55.31	
L1271PG72L3HP	72W 3000K	6480	66.34	

---

# ACCESSORIES

---


## OVVIO LED SUSPENDED ACCESSORIES




**L1271AA13**  
Single wire suspension kit with clutch operated adjustment mechanism.  
Cable length 1500mm.



**L1271AA1330**  
Single wire suspension kit with clutch operated adjustment mechanism.  
Cable length 3000mm.

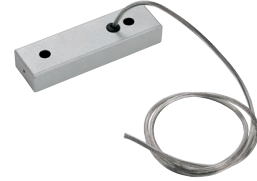

**L1271AA16**  
3 pole-powered supply box.  
Cable length 2000mm.

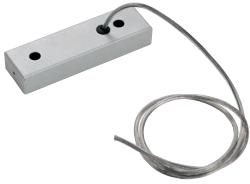

**L1271AA165P**  
5 pole-powered supply box.  
Cable length 2000mm.



**L1271AA11LED**  
Linear joint.



**L1271AA09LED**  
End cap kit.


---

## OVVIO LED WALL ACCESSORIES



**L1271AA15LED**  
Kit for wall mounting.

# OVVIO LED RECESSED ACCESSORIES

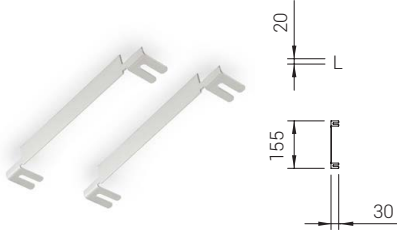

- L1271PL1125:** for 24W (LP) / 48W (HP)
- L1271PL1405:** for 30W (LP) / 60W (HP)
- L1271PL1685:** for 36W (LP) / 72W (HP)
- L1271PL2805:** for 60W (LP)
- L1271PL3085:** for 66W (LP)

## L1271AAPIL

Header kit for recessed continuous rows.

Side aluminum profiles for recessed installation in continuous line.  
Each item code consists of no. 2 aluminum profiles, connection plates and spacers.

W	24LP/48HP	30LP/60HP	36LP/72HP	60LP	66LP
mm	1140	1420	1700	2820	3100

	108
--	-----