

SLIM

Top Wall Fixture

TYPE:

PROJECT NAME:



SLIM

- Die-cast EN AB-46100 aluminium housing
- Fixing bracket in stainless steel 304.
- Top pole suitable for pole diam. 89 mm (h = 3500 mm and h = 5500 mm outside ground).
- Powder paint in 2 step process:
 - surface treatment containing ceramic nano particles (Bonderite);
 - polyester powder paint with high resistance against UV rays and corrosion certified Qualicoat®.
- Tempered glass diffuser
- Stainless steel screws A4.
- Electronic ballast dimmable ballast
- Epdm gasket
- Single cable entry with nikel-brass cable blocker IP68 and neoprene cable (L = 4000 mm, L = 6000 mm).
- The led modules can't be replaced in the fixture (UE 874/2012 norms).
- IP66, Class I
- In according to EN60598-1 norms and relative specifications.

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart®** BRAND

WWW.LUMINARTLIGHTING.COM

SLIM

Top Wall Fixture

TYPE:

PROJECT NAME:

MODEL #

FINISH

LED COLOR

OPTIC

DRIVER

VOLTAGE



Configuration code
L228306 + .1

Finishing

-  .1 Anthracite grey
-  .4 Aluminum grey



L228306

LED 34w max 3500 lumen
4000°K CRI>80
120-277v 50/60Hz



IP66 CL I
Ik08



Virtual midnight



Protection
overvoltage 10KV

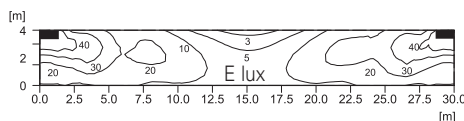

- With optic for bicycle lanes (S4).
Luminous flux wasted upward 0%.
- On request can be supplied
in twin head version.



L228310

LED 34w max 3500 lumen
4000°K CRI>80
120-277v 50/60Hz



IP66 CL I
Ik08



Virtual midnight



Protection
overvoltage 10KV

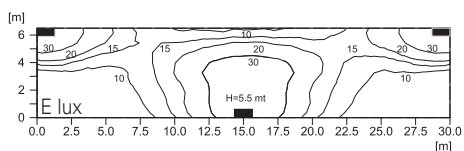

- With street optic (Me5).
Luminous flux wasted upward 0%.
- On request can be supplied
in twin head version.

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM