

# PASSUM UP

Ground and wall recessed up-light luminaires,  
adjustable optic



ø 70 **LED**  
2.76"



ø 125 **LED**  
4.92"



ø 180 **LED**  
7.09"



ø 245 **LED RGB**  
9.65"

# PASSUM UP ultraflat

Low depth recessed up-light



ø 125 **LED**  
4.92"

# PASSUM UP

Ground + wall recessed up-lights, adjustable optic walk over + driver over

## GENERAL FEATURES

A range of recessed luminaires in primary low copper content aluminium alloy, painted in double coat polyester powders after phosphochrome, resistant to UV rays and harsh weather conditions.

Dimensions:  $\varnothing$  70/125/180 and 245 mm.

Remote control driver for  $\varnothing$  70 mm and driver Inside for  $\varnothing$  125/180/245 mm.

Fixed optic for  $\varnothing$  70 mm, fully adjustable  $\pm 15^\circ$  for  $\varnothing$  125 and 180 mm and  $\pm 25^\circ$  for  $\varnothing$  245 mm.

Power led 1/3/49,5/29W with CRI 80 available in 4000 and 3000 K.

Life: 50.000 h with max decreasing of 30% - L70 B50.

Security tempered glass with touch temperature  $T \leq 40^\circ$ , thickness from 6 to 12 m. Walk over and driver over allowed.

On require opal and skidproof glasses.

Light body supplied pre-wired with 0,5 mt in-ground cable H07RN-F and connection block IP68.

Low depth recessing box in waterproof technpolymer.

The covering flanges are supplied separately, available in copper free aluminium or in stainless steel AISI 316 L with stainless steel screws.

The ultra-flat version d 125 m is suitable to be inserted in a backbox 105 mm depth only.

Made according to EN 60598-1:08+A11:09 European standards  $\text{CE}$


### MAXIMUM MODULARITY

The lighting fittings of the range are supplied in 3 separate parts:  
1 - Recessing box  
2 - Light body with glass and gasket  
3 - Changeable flanges




### ADJUSTABLE AND ROUTABLE OPTIC

Fully adjustable optic (unless for  $\varnothing$  70 mm). Vertically  $\pm 15^\circ$  for  $\varnothing$  125 and 180 mm and  $\pm 25^\circ$  for  $\varnothing$  245 mm. Horizontally for the right firing.



### LIGHT BODY HORIZONTAL REGULATION

After inserting the light body in the recessed box is possible a complete planning regulation, to level out the fitting.



### IN-GROUND WIRING

Any fitting of the range is pre-wired with 0,5 mt H07RN-F cable and connection block IP 68.



### WALK OVER AND DRIVE OVER

Max surface  $T \leq 40^\circ\text{C}$  and load up pressure max 2.000-3.500 Kg (1000 Kg for  $\varnothing$  70 mm).



### MODULAR COVERING FLANGES

Available in three versions: aluminium and AISI 316L stainless steel.



# PASSUM UP $\phi 70$ (2.76")


Ground + wall recessed



TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_


## | IN-GROUND BOX

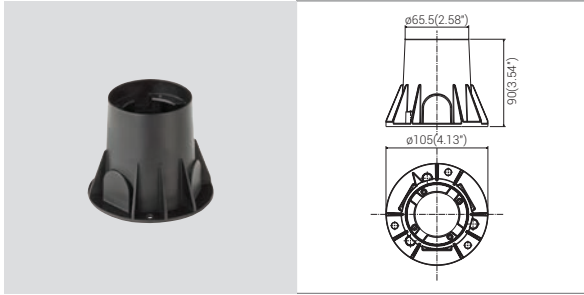

CODE	/ DESCRIPTION
<b>1411</b>	/ In-ground box $\phi$ 70 mm (2.76")

*In-ground box in waterproof technopolymer.*


## | LIGHT BODY $\phi$ 70 mm (2.76")

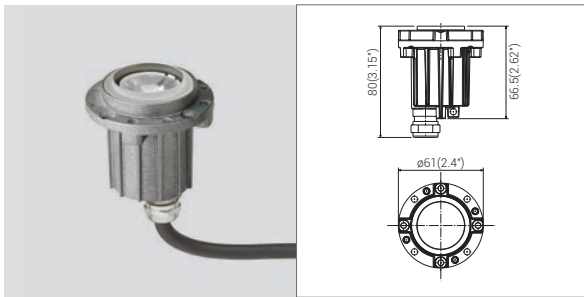


CODE	SORGENTE / LAMP	OTTICA/OPTIC	W	Lm
<b>1413</b>	○ Led	18°-38°-90°	1/3	110/185

**Fixed optic. Remote driver 350 or 700 mA supplied separately.**  
 Clear glass 6 mm (0.236").  
 Load max pressure 1000 Kg.  
 IK 08 / IP 67 / Class III III  
 4000K / CRI 80

*For 3000 K add TC to the code n.*




## | CHANGEABLE FLANGES 70 mm (2.76")



CODE	/ DESCRIPTION
<b>1511</b>	/ Aluminium $\phi$ 70 mm (2.76")

COLOUR **GM**



CODE	/ DESCRIPTION
<b>1512</b>	/ Stainless Steel AISI 316L $\phi$ 70 mm (2.76")

COLOUR **INX**

CODE	/ DESCRIPTION
<b>1513</b>	/ Stainless Steel AISI 316L 70mm(2.76")x70mm (2.76")

COLOUR **INX**

SPECIFICATION SHEET