

BIC 02

TYPE:

RECESSED

PROJECT NAME:





SPECIFICATION SHEET

BIC 02

TYPE:

RECESSED

PROJECT NAME:



IP40	MC-E=3	CE	F	Ⓢ
500m/A	LED 6W	CRI>90		
B2M.2 ■ S. □	P = 0.78"			
B2MH.2 ■ S. □	P = 0.59"			
<i>With honeycomb.</i>				
■ Led color	Nominal lm	Beam spread		
2 = 2700 °K	528	S = 22°		
3 = 3000 °K	552			
4 = 4000 °K	594			



IP40	MC-E=3	CE	F	Ⓢ
350m/A	LED 11W	CRI>85		
B2M.3 ■ ▲. □	P = 1.02"			
B2MH.3 ■ ▲. □	P = 0.82"			
<i>With honeycomb.</i>				
■ Led color	Nominal lm	▲ Beam spread		
2 = 2700 °K	1195	S = 22°		
3 = 3000 °K	1257	T = 15°		
4 = 4000 °K	1313			

© (m-M) Converter

DRV.500.15 (1-1) on/off

© (m-M) Converter

- DRV.350.1L** (1-1) on/off
- DRV.350.25** (2-2) on/off
- DRV.352.15** (1-1) DALI
- DRV.353.15** (1-1) Push - 1...10V
- DRV.354.18** (1-1) IGBT - TRIAC

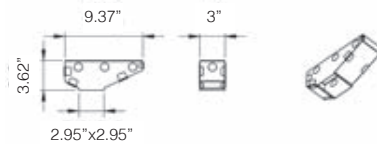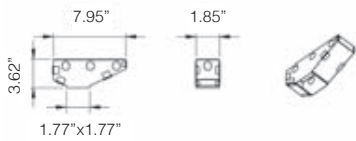

Housing

M02.050.01

Housing

M02.080.01

□ Frame

- 02** ● Black
- 06** ○ White
- C** ● Copper
- S** ● Brass



INPUT VOLTAGE 120V

SPECIFICATION SHEET