

POP 12 RING

TYPE:

WALL

PROJECT NAME:



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM

POP 12 RING

TYPE:

WALL

PROJECT NAME:

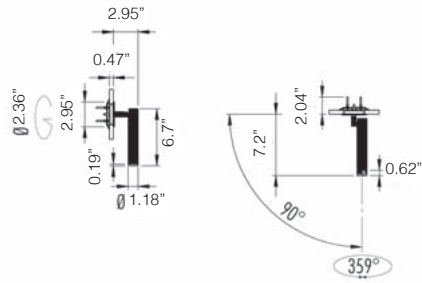


IP20	MC-E=3	CE	▽	⊕
120V	6W	CRI>90		
PR12.2 ■ S. □				
■ Led color	Nominal lm	Beam spread		
2 = 2700 °K	528	S = 24°		
3 = 3000 °K	552			
4 = 4000 °K	594			

© (m-M) Converter

- DRV.500.15 (1-1) on/off
- DRV.501.50 (1-7) DALI - Push - 1...10V (Remote installation)
- DRV.502.20 (1-3) DALI
- DRV.503.20 (1-3) Push - 1...10V
- DRV.504.10 (1-1) IGBT - Triac

□ Frame	Ring
02 ● Black	● Black
06 ○ White	○ White
KC ● Black	● Copper
KS ● Black	● Brass
WC ○ White	● Copper
WS ○ White	● Brass



Installation note: Comes with 4" round backplate to cover junction box

(m-M) = min. Led unit - Max Led unit