

FUSION

MODULAR LED SYSTEM

TYPE:

PROJECT NAME:



FUSION

HANGING SYSTEM

The concept of linearity applied to a modular double diffusion hanging lamp. Fusion is made from epoxy polyester powder coated aluminium and it is equipped with a frosted light diffuser, high efficiency LED modules and driver. The lamp is suspended with galvanized steel cables (not included) with quick-adjust regulation devices. A wide range of accessories is available to customize the system. This product includes wiring with four wires that pass through two electrical circuits with shared neutral. 30° lens reducing the luminaire's direct lighting (UGR<19, standards UNI-11165 and EN 12464-1), SA emergency version (1 hour of autonomy) and switch-dim/DALI dimmable version available on request. Its degree of protection against the penetration of dust, solid objects and liquids is IP40.

SPECIFICATION SHEET

 LEDODOLOGY®

A **Luminart**® BRAND

WWW.LUMINARTLIGHTING.COM

FUSION

MODULAR LED SYSTEM

TYPE:

PROJECT NAME:




	↕ 70° — (30° on request) ↗ 120°
TC	3000K / 4000K
IP	40
CRI	>80
EEI	A++
RG	0
08	Satin white

FUSION PRO LIGHT BIDIFFUSION


CODE	W	Lm (3000K)
L25A6-606.2.084...	2x27	2x3300
L25A6-606.2.112...	2x35	2x4400
L25A6-606.2.140...	2x44	2x5500
L25A6-606.2.168...	2x53	2x6600
L25A6-606.2.196...	2x62	2x7700
L25A6-606.2.224...	2x71	2x8800
L25A6-606.2.252...	2x80	2x9900
L25A6-606.2.280...	2x88	2x11000
L25LE001-30/100	30° lens	

/DIMM2 DALI dimmer

/DIMM3 DIM-switch dimmer

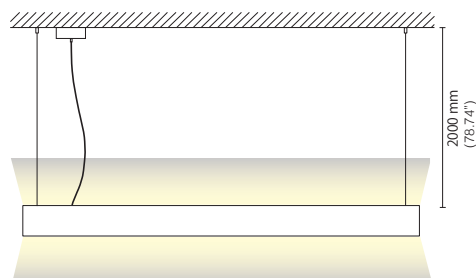

mm	code
(33.26") 845*	L25A6-606.2.084...
(44.29") 1125*	L25A6-606.2.112...
(55.3") 1405*	L25A6-606.2.140...
(66.33") 1685*	L25A6-606.2.168...
(77.36") 1965*	L25A6-606.2.196...
(88.38") 2245*	L25A6-606.2.224...
(99.4") 2525*	L25A6-606.2.252...
(110.4") 2805*	L25A6-606.2.280...



***NOTICE:** add 1,8 mm thickness for the end caps to the beginning and the end of the system.
Product code/T=1 end cap
Product code/TT=2 end caps

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

FUSION

MODULAR LED SYSTEM

TYPE:


PROJECT NAME:

FUSION PRO BIDIFFUSION


CODE	W	Lm (3000K)
L25A6-607.2.084...	2x30	2x3960
L25A6-607.2.112...	2x40	2x5280
L25A6-607.2.140...	2x50	2x6600
L25A6-607.2.168...	2x60	2x7920
L25A6-607.2.196...	2x70	2x9240
L25A6-607.2.224...	2x80	2x10560
L25A6-607.2.252...	2x90	2x11880
L25A6-607.2.280...	2x100	2x13200
L25LE001-30/100	30° lens	

/DIMM2 DALI dimmer

/DIMM3 DIM-switch dimmer

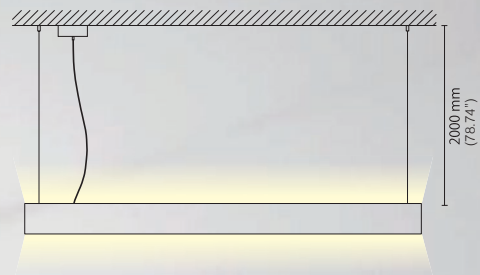

mm	code
(33.26") 845*	L25A6-607.2.084...
(44.29") 1125*	L25A6-607.2.112...
(55.3") 1405*	L25A6-607.2.140...
(66.33") 1685*	L25A6-607.2.168...
(77.36") 1965*	L25A6-607.2.196...
(88.38") 2245*	L25A6-607.2.224...
(99.4") 2525*	L25A6-607.2.252...
(110.4") 2805*	L25A6-607.2.280...



***NOTICE:** add 1,8mm thickness for the end caps to the beginning and the end of the system.
Product code/T=1 end cap
Product code/TT=2 end caps

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart®** BRAND

WWW.LUMINARTLIGHTING.COM

FUSION

MODULAR LED SYSTEM

TYPE:

PROJECT NAME:

CODE DESCRIPTION

HANGING SYSTEM ACCESSORIES

L25A6-019.3	Ceiling cup with supply cable 3x0.75mm ² 200cm (78.74")
L25A6-019.4	Ceiling cup with supply cable 4x0.75mm ² 200cm (78.74") for double switch use
L25A6-019.5	Ceiling cup with supply cable 5x0.75mm ² 200cm (78.74") for dimming and emergency use
L25A6-036	Suspension cables, 200cm (78.74")
L25A6-037	In-line connector
X	Extension + 32mm for a 90° corner
Y	Extension + 32mm for a 90° corner
Z	Extension + 32mm for a 90° corner
K	Extension + 32mm for a 90° corner
W	Extension + 32mm for a 90° corner
T	End cap (single)
TT	End caps (pair)
L25LE001-30/100	30° lens (code per meter (39.37"))

CEILING SYSTEM ACCESSORIES

L25A6-037	In-line connector
X	Extension + 32mm for a 90° corner
Y	Extension + 32mm for a 90° corner
Z	Extension + 32mm for a 90° corner
K	Extension + 32mm for a 90° corner
W	Extension + 32mm for a 90° corner
T	End cap (single)
TT	End caps (pair)
L25LE001-30/100	30° lens (code per meter (39.37"))

RECESSED SYSTEM WITH TRIM ACCESSORIES

L25A6-037	In-line connector
L25A6-038	End caps (pair)
X	Extension + 37mm for a 90° corner
Y	Extension + 37mm for a 90° corner
Z	Extension + 37mm for a 90° corner
K	Extension + 37mm for a 90° corner
W	Extension + 37mm for a 90° corner
L25LE001-30/100	30° lens (code per meter (39.37"))

TRIMLESS RECESSED SYSTEM ACCESSORIES

L25A6-037	In-line connector
L25A6-038	End caps (pair)
L25A6-040	End caps for a flush box (pair)
X	Extension + 32mm for a 90° corner
Y	Extension + 32mm for a 90° corner
Z	Extension + 32mm for a 90° corner
K	Extension + 32mm for a 90° corner
W	Extension + 32mm for a 90° corner
L25LE001-30/100	30° lens (code per meter (39.37"))
L250800/DIM	Dimming kit
L250800/EM	Emergency kit with batteries



Cod. X



Cod. Y



Cod. Z




Cod. K



Cod. W

Customized corner on request

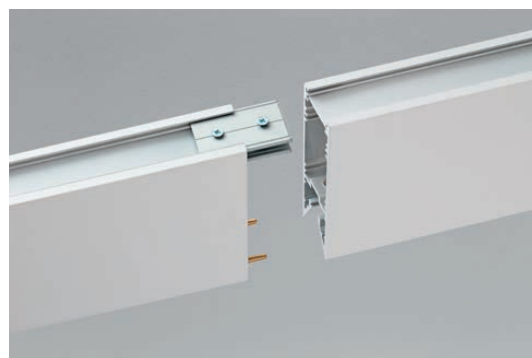

In-line connector

SPECIFICATION SHEET

LEDODOLOGY®

A Luminart® BRAND

WWW.LUMINARTLIGHTING.COM