

LINE

RECESSED LED SYSTEM

TYPE:

PROJECT NAME:

LINE SOFT WITH TRIM

CODE	W	Lm (3000K)
L25A6-624S.084...	18	2430
L25A6-624S.112...	24	3250
L25A6-624S.140...	30	4060
L25A6-624S.168...	36	4870
L25A6-624S.196...	42	5680
L25A6-624S.224...	48	6500
L25A6-624S.252...	54	7310
L25A6-624S.280...	60	8120

L25A6-015/100* *Micro-prismatic polymethyl methacrylate screen*

/DIMM2 DALI dimmer

/DIMM3 DIM-switch dimmer  not available for code L25A6-624S.084

/EM emergency module

*code per meter (39.37")

 105°

 TC 3000K / 4000K

 IP 40


 CRI >80

 EEI A++


 RG 0

 09 Satin white

 Intertek



mm	code	Kg
(33.26") 845*	L25A6-624S.084	1,8
(44.29") 1125*	L25A6-624S.112	2,3
(55.3") 1405*	L25A6-624S.140	2,8
(66.33") 1685*	L25A6-624S.168	3,3
(77.36") 1965*	L25A6-624S.196	4,1
(88.38") 2245*	L25A6-624S.224	4,5
(99.4") 2525*	L25A6-624S.252	5,1
(110.4") 2805*	L25A6-624S.280	5,6



***NOTICE:** add a 10 mm thickness for the end caps to the beginning and the end of the system.

 width: 50 mm
 length: subtract 14 mm from the total length of the composition.

LINE

RECESSED SYSTEM

Line is a modular single emission recessed lamp made from epoxy polyester powder coated aluminium and it is equipped with an opal polycarbonate diffuser, high efficiency LED modules and driver. A wide range of accessories is available to customize the system. This product includes wiring with four wires that pass through two electrical circuits with shared neutral. Micro-prismatic polymethyl methacrylate screen reducing the luminaire's direct lighting (UGR<19, standards UNI-11165 and EN 12464-1), SA emergency version (1 hour of autonomy) and switch-dim/DALI dimmable version available on request. Its degree of protection against the penetration of dust, solid objects and liquids is IP40.

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

LINE

RECESSED LED SYSTEM

TYPE:


PROJECT NAME:

LINE SOFT TRIMLESS


CODE	W	Lm (3000K)
L25A6-626S.084...	18	2430
L25A6-626S.112...	24	3250
L25A6-626S.140...	30	4060
L25A6-626S.168...	36	4870
L25A6-626S.196...	42	5680
L25A6-626S.224...	48	6500
L25A6-626S.252...	54	7310
L25A6-626S.280...	60	8120

L25A6-015/100* *Micro-prismatic polymethyl methacrylate screen*

/DIMM2 DALI dimmer
 /DIMM3 DIM-switch dimmer ☐ not available for code L25A6-626S.084
 /EM emergency module
 *code per meter (39.37")



mm	code	Kg
(33.26") 845*	L25A6-626S.084	1,8
(44.29") 1125*	L25A6-626S.112	2,3
(55.3") 1405*	L25A6-626S.140	2,8
(66.33") 1685*	L25A6-626S.168	3,3
(77.36") 1965*	L25A6-626S.196	4,1
(88.38") 2245*	L25A6-626S.224	4,5
(99.4") 2525*	L25A6-626S.252	5,1
(110.4") 2805*	L25A6-626S.280	5,6



***NOTICE:** add a 2,5 mm thickness for the end caps to the beginning and the end of the system.

☐ width: 47 mm
 length: add 9 mm to the total length of the composition.

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

LINE

RECESSED LED SYSTEM

TYPE:


PROJECT NAME:

LINE PRO TRIMLESS


CODE	W	Lm (3000K)
L25A6-626P.084...	36	4500
L25A6-626P.112...	48	6000
L25A6-626P.140...	60	7500
L25A6-626P.168...	72	9000
L25A6-626P.196...	84	10500
L25A6-626P.224...	96	12000
L25A6-626P.252...	108	13500
L25A6-626P.280...	120	15000

L25A6-015/100* *Micro-prismatic polymethyl methacrylate screen*

/DIMM2 DALI dimmer
/DIMM3 DIM-switch dimmer
/EM emergency module
*code per meter (39.37")



mm	code	Kg
(33.26") 845*	L25A6-626P.084	1,8
(44.29") 1125*	L25A6-626P.112	2,3
(55.3") 1405*	L25A6-626P.140	2,8
(66.33") 1685*	L25A6-626P.168	3,3
(77.36") 1965*	L25A6-626P.196	4,1
(88.38") 2245*	L25A6-626P.224	4,5
(99.4") 2525*	L25A6-626P.252	5,1
(110.4") 2805*	L25A6-626P.280	5,6



***NOTICE:** add a 2,5 mm thickness for the end caps to the beginning and the end of the system.


width: 47 mm
length: add 9 mm to the total length of the composition.

LINE PRO LIGHT TRIMLESS


CODE	W	Lm (3000K)
L25A6-626PL.084...	27	3300
L25A6-626PL.112...	35	4400
L25A6-626PL.140...	44	5500
L25A6-626PL.168...	53	6600
L25A6-626PL.196...	62	7700
L25A6-626PL.224...	71	8800
L25A6-626PL.252...	80	9900
L25A6-626PL.280...	88	11000

L25A6-015/100* *Micro-prismatic polymethyl methacrylate screen*

/DIMM2 DALI dimmer
/DIMM3 DIM-switch dimmer
/EM emergency module
*code per meter (39.37")

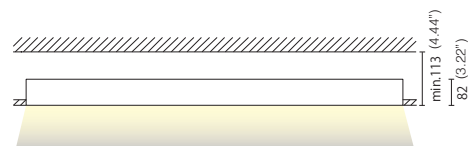

mm	code	Kg
(33.26") 845*	L25A6-626PL.084	1,8
(44.29") 1125*	L25A6-626PL.112	2,3
(55.3") 1405*	L25A6-626PL.140	2,8
(66.33") 1685*	L25A6-626PL.168	3,3
(77.36") 1965*	L25A6-626PL.196	4,1
(88.38") 2245*	L25A6-626PL.224	4,5
(99.4") 2525*	L25A6-626PL.252	5,1
(110.4") 2805*	L25A6-626PL.280	5,6



***NOTICE:** add a 2,5 mm thickness for the end caps to the beginning and the end of the system.

width: 47 mm
length: add 9 mm to the total length of the composition.

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

LINE

RECESSED LED SYSTEM

TYPE:

PROJECT NAME:

CODE

DESCRIPTION

Suspension accessories

L25A6-011	End caps (pair). Colour 02-09
L25A6-019.3	Ceiling cup with supply cable 3x0.75mm ² 200cm (78.74"). Colour 02-09
L25A6-019.4	Ceiling cup with supply cable 4x0.75mm ² 200cm (78.74") for double switch use. Colour 02-09
L25A6-019.5	Ceiling cup with supply cable 5x0.75mm ² 200cm (78.74") for dimming and emergency use. Colour 02-09
L25A6-017	Suspension cables, 200cm (78.74")
L25A6-012	In-line connector
X	Extension + 45mm for a 90° corner
Y	Extension + 45mm for a 90° corner
Z	Extension + 45mm for a 90° corner
K	Extension + 45mm for a 90° corner
W	Extension + 45mm for a 90° corner
L25A6-015/100	Micro-prismatic polymethyl methacrylate diffuser (code per meter (39.37"))



Cod. X



Cod. Y



Cod. Z

Ceiling accessories

L25A6-011	End caps (pair). Colour 02-09
L25A6-012	In-line connector
X	Extension + 45mm for a 90° corner
Y	Extension + 45mm for a 90° corner
Z	Extension + 45mm for a 90° corner
K	Extension + 45mm for a 90° corner
W	Extension + 45mm for a 90° corner
L25A6-015/100	Micro-prismatic polymethyl methacrylate diffuser (code per meter (39.37"))



Cod. K



Cod. W


Recessed with trim accessories

L25A6-011	End caps (pair)
L25A6-012	In-line connector
X	Extension + 48mm for a 90° corner
Y	Extension + 48mm for a 90° corner
Z	Extension + 48mm for a 90° corner
K	Extension + 48mm for a 90° corner
W	Extension + 48mm for a 90° corner
L25A6-015/100	Micro-prismatic polymethyl methacrylate diffuser (code per meter (39.37"))

Customized corner on request

Recessed trimless accessories

L25A6-011	End caps (pair)
L25A6-012	In-line connector
X	Extension + 45mm for a 90° corner
Y	Extension + 45mm for a 90° corner
Z	Extension + 45mm for a 90° corner
K	Extension + 45mm for a 90° corner
W	Extension + 45mm for a 90° corner
L25A6-015/100	Micro-prismatic polymethyl methacrylate diffuser (code per meter (39.37"))

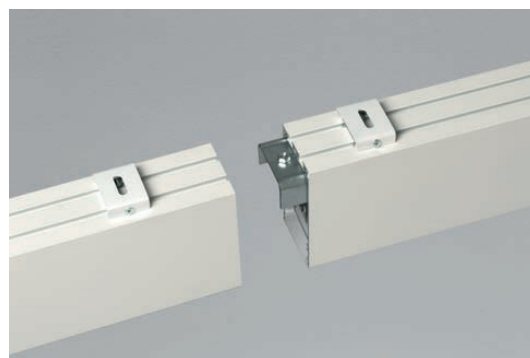

In-line connector

SPECIFICATION SHEET

LED DOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM