


LINE

CEILING LED SYSTEM

TYPE:

PROJECT NAME:

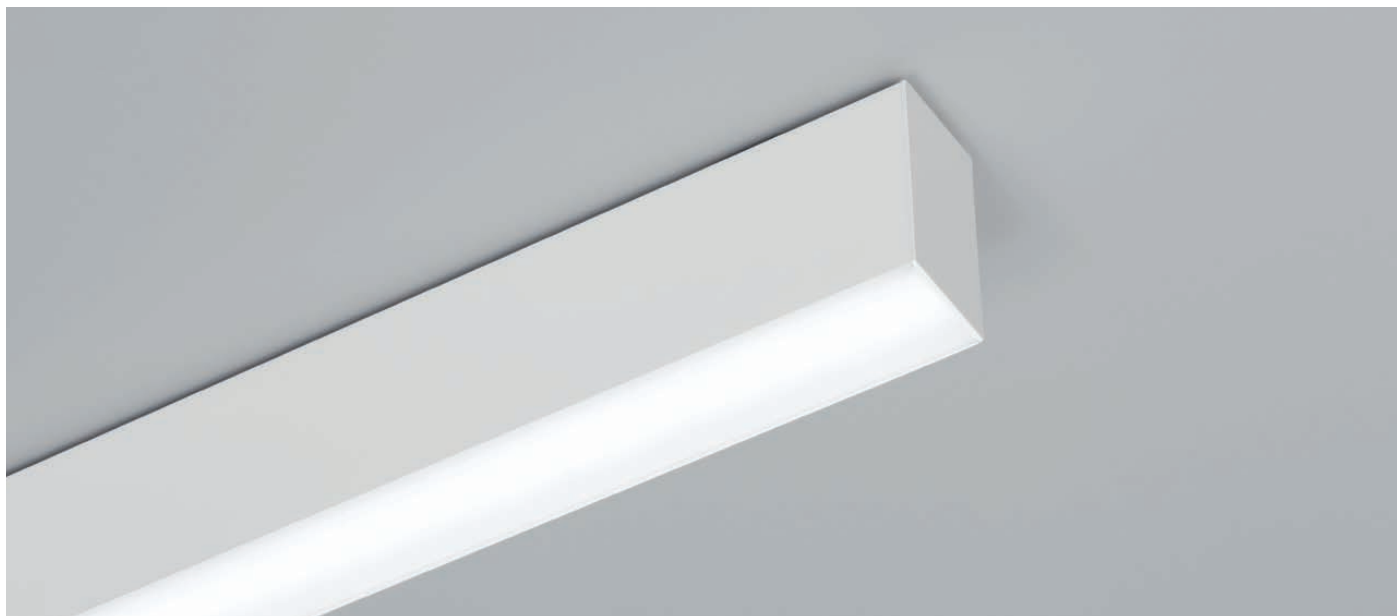

LINE

CEILING SYSTEM

Conceived for enhancing the light, Line is a modular single emission ceiling lamp made from epoxy polyester powder coated aluminium and it is equipped with an opal polycarbonate diffuser, high efficiency LED modules and driver. The lamp is suspended with galvanized steel cables (not included) with quick-adjust regulation devices. A wide range of accessories is available to customize the system. This product includes wiring with four wires that pass through two electrical circuits with shared neutral. Micro-prismatic polymethyl methacrylate screen reducing the luminaire's direct lighting (UGR<19, standards UNI-11165 and EN 12464-1), SA emergency version (1 hour of autonomy) and switch-dim/DALI dimmable version available on request. Its degree of protection against the penetration of dust, solid objects and liquids is IP40.

SPECIFICATION SHEET

 LEDODOLOGY®

A **Luminart**® BRAND

WWW.LUMINARTLIGHTING.COM

LINE

CEILING LED SYSTEM

TYPE:

PROJECT NAME:

LINE SOFT

CODE	W	Lm (3000K)
L25A6-614S.084...	18	2430
L25A6-614S.112...	24	3250
L25A6-614S.140...	30	4060
L25A6-614S.168...	36	4870
L25A6-614S.196...	42	5680
L25A6-614S.224...	48	6500
L25A6-614S.252...	54	7310
L25A6-614S.280...	60	8120

L25A6-015/100* *Micro-prismatic polymethyl methacrylate screen*

/DIMM2 DALI dimmer

/DIMM3 DIM-switch dimmer

/EM emergency module

*code per meter (39.37")

not available for code L25A6-614S.084



105°



3000K / 4000K



40



>80



A++



0



Matte black




Satin white



Intertek



mm	code	Kg
(33.26") 845*	L25A6-614S.084	1,8
(44.29") 1125*	L25A6-614S.112	2,3
(55.3") 1405*	L25A6-614S.140	2,8
(66.33") 1685*	L25A6-614S.168	3,3
(77.36") 1965*	L25A6-614S.196	4,1
(88.38") 2245*	L25A6-614S.224	4,5
(99.4") 2525*	L25A6-614S.252	5,1
(110.4") 2805*	L25A6-614S.280	5,6



***NOTICE:** add a 2,5 mm thickness for the end caps to the beginning and the end of the system.

SPECIFICATION SHEET

LEDODOLOGY®

A **Luminart®** BRAND

WWW.LUMINARTLIGHTING.COM

LINE

CEILING LED SYSTEM

TYPE:

PROJECT NAME:

LINE PRO

CODE	W	Lm (3000K)
L25A6-614P.084...	36	4500
L25A6-614P.112...	48	6000
L25A6-614P.140...	60	7500
L25A6-614P.168...	72	9000
L25A6-614P.196...	84	10500
L25A6-614P.224...	96	12000
L25A6-614P.252...	108	13500
L25A6-614P.280...	120	15000

L25A6-015/100* *Micro-prismatic polymethyl methacrylate screen*


/DIMM2 DALI dimmer
/DIMM3 DIM-switch dimmer
/EM emergency module
*code per meter (39.37")

LINE PRO LIGHT


CODE	W	Lm (3000K)
L25A6-614PL.084...	27	3300
L25A6-614PL.112...	35	4400
L25A6-614PL.140...	44	5500
L25A6-614PL.168...	53	6600
L25A6-614PL.196...	62	7700
L25A6-614PL.224...	71	8800
L25A6-614PL.252...	80	9900
L25A6-614PL.280...	88	11000

L25A6-015/100* *Micro-prismatic polymethyl methacrylate screen*


/DIMM2 DALI dimmer
/DIMM3 DIM-switch dimmer
/EM emergency module
*code per meter (39.37")




mm	code	Kg
(33.26") 845*	L25A6-614P.084	1,8
(44.29") 1125*	L25A6-614P.112	2,3
(55.3") 1405*	L25A6-614P.140	2,8
(66.33") 1685*	L25A6-614P.168	3,3
(77.36") 1965*	L25A6-614P.196	4,1
(88.38") 2245*	L25A6-614P.224	4,5
(99.4") 2525*	L25A6-614P.252	5,1
(110.4") 2805*	L25A6-614P.280	5,6



***NOTICE:** add a 2,5 mm thickness for the end caps to the beginning and the end of the system.



mm	code	Kg
(33.26") 845*	L25A6-614PL.084	1,8
(44.29") 1125*	L25A6-614PL.112	2,3
(55.3") 1405*	L25A6-614PL.140	2,8
(66.33") 1685*	L25A6-614PL.168	3,3
(77.36") 1965*	L25A6-614PL.196	4,1
(88.38") 2245*	L25A6-614PL.224	4,5
(99.4") 2525*	L25A6-614PL.252	5,1
(110.4") 2805*	L25A6-614PL.280	5,6



***NOTICE:** add a 2,5 mm thickness for the end caps to the beginning and the end of the system.

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart®** BRAND

WWW.LUMINARTLIGHTING.COM

LINE

CEILING LED SYSTEM

TYPE:

PROJECT NAME:

CODE

DESCRIPTION

Suspension accessories

L25A6-011	End caps (pair). Colour 02-09
L25A6-019.3	Ceiling cup with supply cable 3x0.75mm ² 200cm (78.74"). Colour 02-09
L25A6-019.4	Ceiling cup with supply cable 4x0.75mm ² 200cm (78.74") for double switch use. Colour 02-09
L25A6-019.5	Ceiling cup with supply cable 5x0.75mm ² 200cm (78.74") for dimming and emergency use. Colour 02-09
L25A6-017	Suspension cables, 200cm (78.74")
L25A6-012	In-line connector
X	Extension + 45mm for a 90° corner
Y	Extension + 45mm for a 90° corner
Z	Extension + 45mm for a 90° corner
K	Extension + 45mm for a 90° corner
W	Extension + 45mm for a 90° corner
L25A6-015/100	Micro-prismatic polymethyl methacrylate diffuser (code per meter (39.37"))



Cod. X



Cod. Y



Cod. Z

Ceiling accessories

L25A6-011	End caps (pair). Colour 02-09
L25A6-012	In-line connector
X	Extension + 45mm for a 90° corner
Y	Extension + 45mm for a 90° corner
Z	Extension + 45mm for a 90° corner
K	Extension + 45mm for a 90° corner
W	Extension + 45mm for a 90° corner
L25A6-015/100	Micro-prismatic polymethyl methacrylate diffuser (code per meter (39.37"))



Cod. K



Cod. W


Recessed with trim accessories

L25A6-011	End caps (pair)
L25A6-012	In-line connector
X	Extension + 48mm for a 90° corner
Y	Extension + 48mm for a 90° corner
Z	Extension + 48mm for a 90° corner
K	Extension + 48mm for a 90° corner
W	Extension + 48mm for a 90° corner
L25A6-015/100	Micro-prismatic polymethyl methacrylate diffuser (code per meter (39.37"))

Customized corner on request

Recessed trimless accessories

L25A6-011	End caps (pair)
L25A6-012	In-line connector
X	Extension + 45mm for a 90° corner
Y	Extension + 45mm for a 90° corner
Z	Extension + 45mm for a 90° corner
K	Extension + 45mm for a 90° corner
W	Extension + 45mm for a 90° corner
L25A6-015/100	Micro-prismatic polymethyl methacrylate diffuser (code per meter (39.37"))

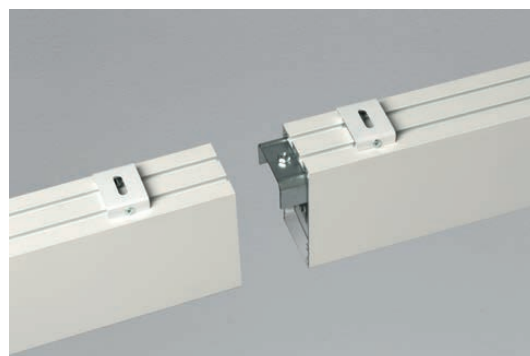

In-line connector

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart®** BRAND

WWW.LUMINARTLIGHTING.COM