

# MINILINE

## RECESSED LED SYSTEM

**TYPE:**


**PROJECT NAME:**

# MINILINE



RECESSED SYSTEM

CODE	W	Lm (3000K)
L25A6-641.100...*	22	2800

\*code per meter  
flush box included  
remote driver not included

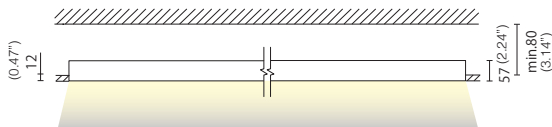

Multiples of 70 mm, max length 4m\*




\*NOTICE: add a 1,2 mm thickness for the end caps to the beginning and to the end of the system.

width: 41 mm  
length: add 6 mm to the total length of the composition

Small dimensions, trimless body and liberty of composition identify this product, which adds elegance and personality to the projects. Provided with a quick magnetic attachment system, Miniline is a modular recessed lamp made from extruded epoxy polyester powder coated aluminium and it is equipped with an opal polycarbonate diffuser and high efficiency LED modules. This fixture requires a 24Vdc remote driver (to be ordered separately) which, for maintenance purposes, must be placed in an inspection box at a distance of no more than 10 metres. Its degree of protection against the penetration of dust, solid objects and liquids is IP40.

	110°
TC	3000K / 4000K
IP	40
CRI	>80
EEL	A+
RG	0
09	Satin white

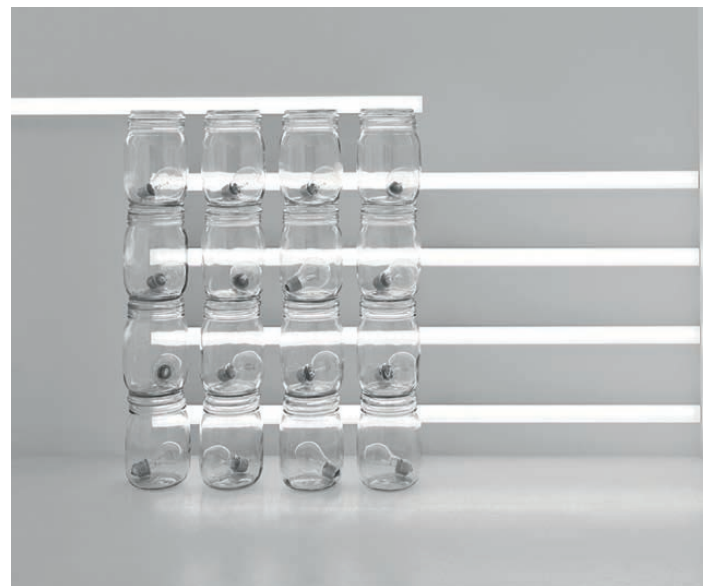

SPECIFICATION SHEET

LEDODOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

# MINILINE

## RECESSED LED SYSTEM


**TYPE:**

**PROJECT NAME:**

CODE	DESCRIPTION
------	-------------

ACCESSORIES

L25A6-031	End caps (pair)
L25A6-032	In-line connector
L25A6-033	End caps for flush box (pair)
X	Extension + 32mm for a 90° corner
Y	Extension + 32mm for a 90° corner
Z	Extension + 32mm for a 90° corner
K	Extension + 32mm for a 90° corner
W	Extension + 32mm for a 90° corner
L250800/DIM	Dimming kit
L250800/EM	Emergency kit with batteries



Cod. X



Cod. Y



Cod. Z




Cod. K



Cod. W

*Customized corner on request*

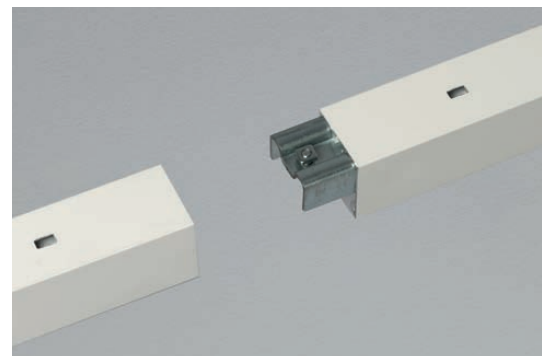

*In-line connector*

SPECIFICATION SHEET