

MUR

WALL/CEILING LED

TYPE:

PROJECT NAME:



SPECIFICATION SHEET



(see tables)

TC

3000K / 4000K

IP

40

CRI

93 (>80 on request)

EEL

A++

RG

1

08
02

Satin white/black

02

Matte black

08

Satin white



Intertek

MUR

WALL / CEILING

Subtle but powerful lines identify these wall/ceiling fixtures, which can be angled into infinite positions to enhance objects and details. Mur luminaires are made from epoxy polyester powder coated aluminium and steel. They are equipped with a high efficiency LED light source and driver. The base can be rectangular with two light sources or square-shaped with four sources. Their degree of protection against the penetration of dust, solid objects and liquids is IP40.

LEDOLOGY[®]

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM


MUR


WALL/CEILING LED

TYPE:


PROJECT NAME:


MUR Ø120

CODE	W	Lm (3000K)	
L25A4-600.212	2x12	2x1615	40° (24° on request)
L25A4-600.217	2x17	2x2240	40° (24° on request)
L25A4-600.223	2x23	2x3025	40° (24° on request)

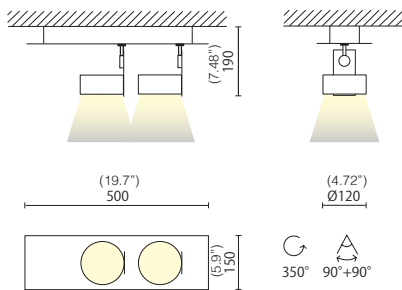

MUR Ø60

CODE	W	Lm (3000K)	
L25A4-202.2	2x9	2x1115	30°

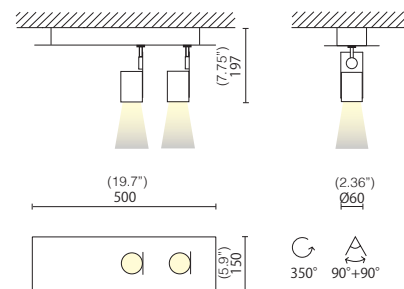

SPECIFICATION SHEET

 LEDOLGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

MUR


WALL/CEILING LED


TYPE:

PROJECT NAME:




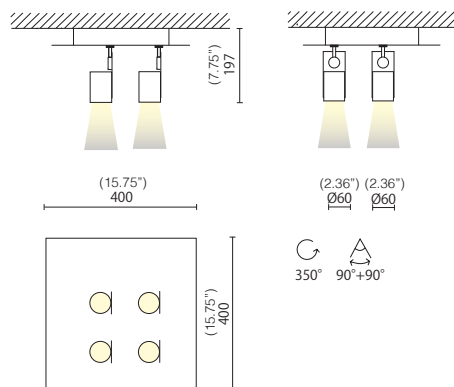
MUR Ø120

CODE	W	Lm (3000K)	
L25A4-602.412	4x12	4x1615	40° (24° on request)
L25A4-602.417	4x17	4x2240	40° (24° on request)
L25A4-602.423	4x23	4x3025	40° (24° on request)

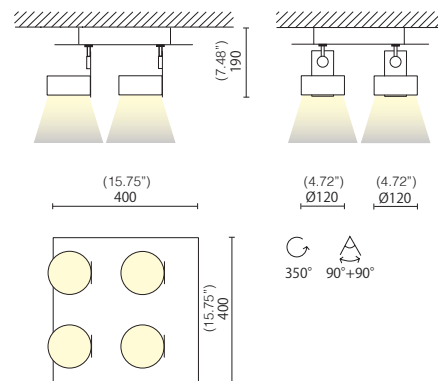

MUR Ø60

CODE	W	Lm (3000K)	
L25A4-203.4	4x9	4x1115	30°



SPECIFICATION SHEET

MUR

WALL/CEILING LED

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

 LEDODOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM