

CILINDRO SOFT

SUSPENSION

TYPE:

PROJECT NAME:

Finish

Fabric Diffusers:



Soft velvet

Fabric lampshade



Velvet/
Soft velvet



Cod. 450
Ivory




Cod. 451
Pastel purple



Cod. 452
Old Red



Cod. 453
Teal-Green



Cod. 454
Grey

IP20

SPECIFICATION SHEET



Canopy detail

* on demand

** cable on measure

Luminart

WWW.LUMINARTLIGHTING.COM
Last updated: 10/13/20

CILINDRO SOFT

SUSPENSION

TYPE:

PROJECT NAME:

Pendant lamp - ø 70	ø 70 x 35 cm 4 Kg	lamp type 1xE26 max watt 70 W HES	L82CISESP070001
	ø 70 x 35 cm 4 Kg	lamp type 3xE26 max watt 70 W HES	L82CISESP070002
Pendant lamp - ø 70	ø 70 x 35 cm 4 Kg	lamp type 1 led module 29.3 W luminous efficacy 3900 Lm light colour 2700 K cri >80	L82CISESP070003
Pendant lamp - ø 100	ø 100 x 35 cm 9 Kg	lamp type 4xE26 max watt 105 W HES	L82CISESP100002
Pendant lamp - ø 100	ø 100 x 35 cm 9 Kg	lamp type 1 led module 29.3 W luminous efficacy 3900 Lm light colour 2700 K cri >80	L82CISESP100003

ORDERING INFO

Model (Order Code)

Finish

Voltage

Dimming


- 120V
 277V

- LTE (Leading/Trailing Edge Dim)
 010V (0-10V)



Fixture comes with a 4" backplate that mounts to a standard junction box.

Please note: 277V is only compatible with 0-10V dimming. Screw-in bulbs are only compatible with 120V with LTE dimming.

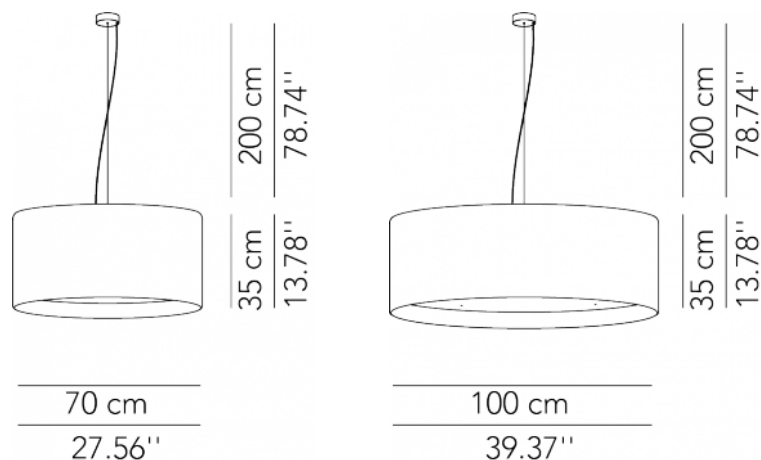

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 10/13/20

CILINDRO SOFT

SUSPENSION

TYPE:

PROJECT NAME:

Pendant lamp - ø 100	ø 100 x 35 cm 9 Kg	lamp type 1 led module 88.2 W luminous efficacy 11780 Lm light colour 2700 K cri >80	L82CISESP100O06
Pendant lamp - ø 120	ø 120 x 35 cm 17 Kg	lamp type 4xE26 max watt 105 W HES	L82CISESP120O02
Pendant lamp - ø 120	ø 120 x 35 cm 17 Kg	lamp type 1 led module 29.3 W luminous efficacy 3900 Lm light colour 2700 K cri >80	L82CISESP120O03
Pendant lamp - ø 120	ø 120 x 35 cm 17 Kg	lamp type 1 led module 88.2 W luminous efficacy 11780 Lm light colour 2700 K cri >80	L82CISESP120O06

ORDERING INFO

Model (Order Code)

Finish

Voltage

Dimming


- 120V
 277V

- LTE (Leading/Trailing Edge Dim)
 010V (0-10V)



Fixture comes with a 4" backplate that mounts to a standard junction box.

Please note: 277V is only compatible with 0-10V dimming. Screw-in bulbs are only compatible with 120V with LTE dimming.

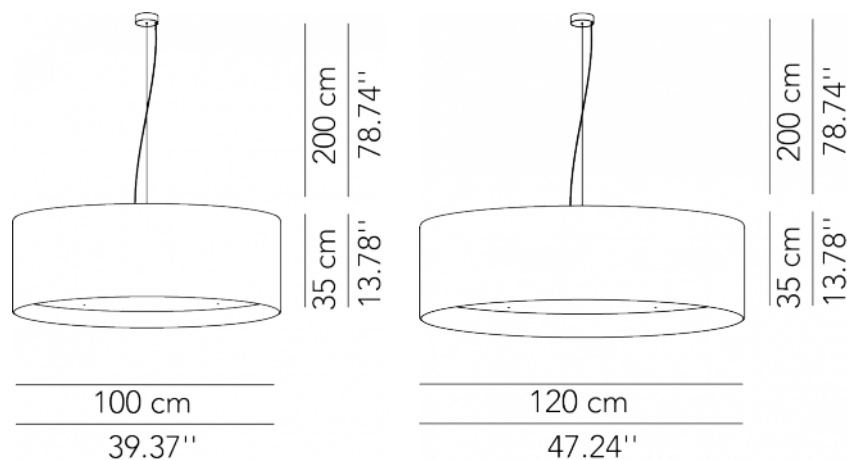

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

Last updated: 10/13/20

CILINDRO SOFT

SUSPENSION

TYPE:

PROJECT NAME:

Pendant lamp - ø 150	ø 150 x 35 cm 30 Kg	lamp type 6xE26 max watt 105 W HES	L82CISESP150002
Pendant lamp - ø 150	ø 150 x 35 cm 30 Kg	lamp type 1 led module 88.2 W luminous efficacy 11780 Lm light colour 2700 K cri >80	L82CISESP150006
Pendant lamp - ø 150	ø 150 x 35 cm 30 Kg	lamp type 1 led module 108 W luminous efficacy 14500 Lm light colour 2700 K cri >80	L82CISESP150008

ORDERING INFO

Model (Order Code)

Finish

Voltage

Dimming

120V

LTE (Leading/Trailing Edge Dim)


277V

010V (0-10V)



Fixture comes with a 4" backplate that mounts to a standard junction box.

Please note: 277V is only compatible with 0-10V dimming. Screw-in bulbs are only compatible with 120V with LTE dimming.

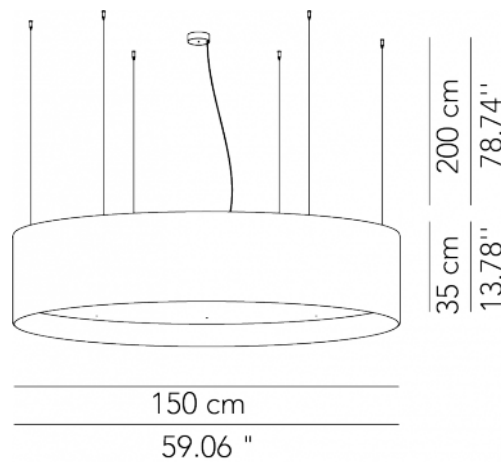

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 10/13/20