

ATOLLO

SUSPENSION

TYPE:

PROJECT NAME:

Finish

Colors:



White

Diffuser in polyethylene, metal structure

Different colours on demand for minimum purchasing quantity




IP31

SPECIFICATION SHEET



Connection for suspension 1 steel cable



Canopy with 1 steel cable for Atollo d.70-100



Canopy with 1 steel cable for Atollo d.150



Canopy for Atollo with 3-4 steel cables



Inner fitting with rotating downlight

** cable on measure

ATOLLO

SUSPENSION

TYPE:

PROJECT NAME:

Pendant lamp - ø 70	ø 70 x 20 cm 13 Kg	lamp type 6xE26 max watt 42W HES	L82ATIESO070D01
	ø 70 x 20 cm 13 Kg	lamp type 1 led strip 40W luminous efficacy 7000 Lm light colour 3000 K cri >80	L82ATIESO070D41
Pendant lamp - ø 100	ø 100 x 22 cm 13 Kg	lamp type 8xE26 max watt 42W HES	L82ATIESO100D01
	ø 100 x 22 cm 13 Kg	lamp type 1 led strip 55W luminous efficacy 9300 Lm light colour 3000 K cri >80	L82ATIESO100D41
Pendant lamp - ø 150	ø 150 x h 28 cm 50 Kg	lamp type 12xE26 max watt 42W HES	L82ATIESO150D01
	ø 150 x h 28 cm 50 Kg	lamp type 1 led strip 82W luminous efficacy 14000 Lm light colour 3000 K cri >80	L82ATIESO150D41

ORDERING INFO

Model (Order Code)

Finish

LED

Voltage

Dimming

- 2700K
 3000K
 4000K


- 120V
 277V

- LTE (Leading/Trailing Edge Dim)
 010V (0-10V)



Fixture comes with a 4" backplate that mounts to a standard junction box.

Please note: 277V is only compatible with 0-10V dimming. Screw-in bulbs are only compatible with 120V with LTE dimming.

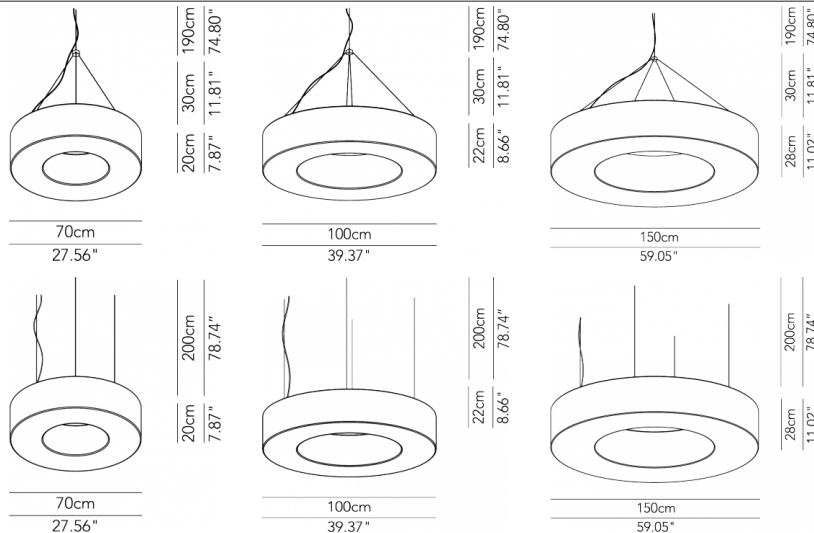

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 10/13/20