

# KYKLO

CEILING

TYPE:

PROJECT NAME:




## KYKLO – 40

CODE NO.	L981241.24V
LAMP	LED
COLOR TEMPERATURE	3K [3000K] / 4K [4000K]
NOMINAL LUMEN	1000
REAL LUMEN OUTPUT	750
WATTAGE	10W

IP

IP 65

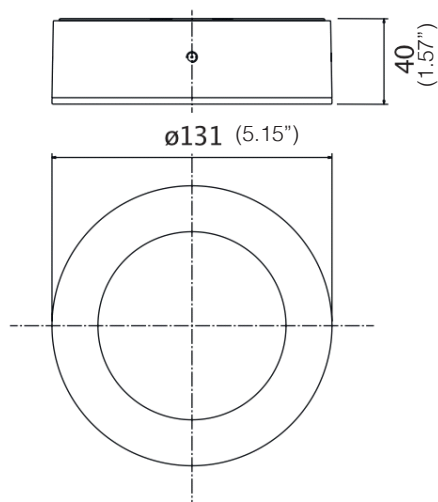

12°

option

add 12 to the code



40°

standard



90°

option


add 90 to the code



10°

option

honeycomb  
add HC to the code



Outdoor luminaire for ceiling installation. Lamp body, base and glass holder frame in primary anti-corrosion aluminum with low copper content. Transparent tempered glass diffuser. LED light source, CRI 80.

Four light beam openings via LED optics with incorporated parabola: 12 ° (option) / 40 ° (standard) / 90 ° (option) / HC (honeycomb - option)

L80B20 led life guaranteed 60,000 hours with subsequent max decay of 20%. Other LED tones on request.

Double varnished finish after pickling, trivalent chromic passivation, epoxy primer and polyester powder coating.

SPECIFICATION SHEET

### ORDERING INFO

Model (Order Code)

Finish

LED

Integral Driver Options

- Graphite
- Metallic Grey
- White

- 3000K
- 4000K

- 120V Phase Dimming



**Luminart®**

WWW.LUMINARTLIGHTING.COM

# KYKLO

CEILING

**TYPE:**

**PROJECT NAME:**




## KYKLO – 40 – OPAL

CODE NO.	L981242.24V
LAMP	LED
COLOR TEMPERATURE	3K [3000K] / 4K [4000K]
NOMINAL LUMEN	1000
REAL LUMEN OUTPUT	500
WATTAGE	10W

IP

IP 65

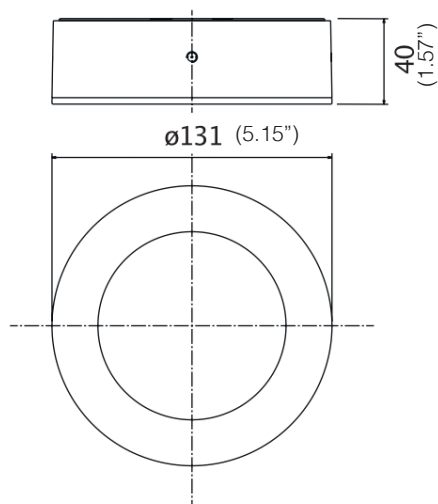

Outdoor luminaire for ceiling installation.

Lamp body, base and glass holder frame in primary anti-corrosion aluminum with low copper content.

LED light source, CRI 80.

Opal diffuser with 120° opening angle through incorporated LED optic.

L80B20 led life guaranteed 60,000 hours with subsequent max decay of 20%.

Other LED tones on request.

Double varnished finish after pickling, trivalent chromic passivation, epoxy primer and polyester powder coating.

SPECIFICATION SHEET

### ORDERING INFO

Model (Order Code)

Finish

LED

Integral Driver Options

- Graphite
- Metallic Grey
- White

- 3000K
- 4000K

- 120V Phase Dimming



**Luminart®**

WWW.LUMINARTLIGHTING.COM