

PEGGY

CEILING

TYPE:

PROJECT NAME:

IP20



Finish

Non-acoustic:



White

PMMA



Black



Matte gold

Acoustic:



Wool

Uplight and
downlight


Painted metal disc
or wool fabric
acoustic disc. Conic
diffuser in painted
metal or globe
diffuser in opal
PMMA



Wool



Peggy: Up light
emission detail



Peggy LED: Up light
emission detail



Peggy Ball: Up
light emission
detail



Cod. 650
Sand



Cod. 651
Orange



Cod. 652
Green



Cod. 653
Mustard yellow



Cod. 654
Purple



Cod. 655
Avio blue



Cod. 656
Dark grey

SPECIFICATION SHEET


PEGGY

CEILING

TYPE:

PROJECT NAME:

Ceiling lamp - D. 60	ø 60 x 26 cm 6 Kg	lamp type 1 x 15W E26 LED + 3 x 5W R7S LED	L82PEGEPL060G01
	ø 60 x 26 cm 6 Kg	lamp type 2 led module 17W + 9W luminous efficacy 3755 Lm light colour 2700 K cri >80	L82PEGEPL060G02
Ceiling lamp Ball - D. 60	ø 60 x 26 cm 6 Kg	lamp type 1 x 15W E26 LED + 3 x 5W R7S LED	L82PEBEPL060M01
Ceiling lamp - D. 80	ø 80 x 28 cm 8,5 Kg	lamp type 1 x 15W E26 LED + 3 x 5W R7S LED	L82PEGEPL080G01
	ø 80 x 28 cm 8,5 Kg	lamp type 2 led module 17W + 18W luminous efficacy 5141 Lm light colour 2700 K cri >80	L82PEGEPL080G02
Ceiling lamp Ball - D. 80	ø 80 x 28 cm 8,5 Kg	lamp type 1 x 15W E26 LED + 3 x 5W R7S LED	L82PEBEPL080M01

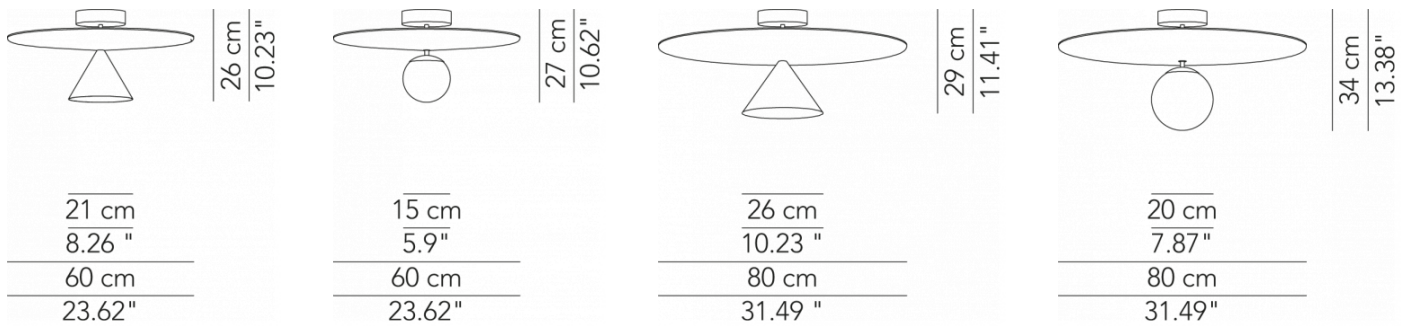

ORDERING INFO

Model (Order Code)	Finish	LED	Remote Driver Options
		<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming

ETL Intertek

Fixture comes with a 4" backplate that mounts to a standard junction box.

SPECIFICATION SHEET


PEGGY

CEILING

TYPE:


PROJECT NAME:

Ceiling lamp - D. 100	ø 100 x 40 cm 12 Kg	lamp type 1 x 15W E26 LED + 3 x 5W R7S LED	L82PEGEPL100G01
	ø 100 x 40 cm 12 Kg	lamp type 2 led module 17W + 18W luminous efficacy 5287 Lm light colour 2700 K cri >80	L82PEGEPL100G02
Ceiling lamp Ball - D. 100	ø 100 x 40 cm 12 Kg	lamp type 1 x 15W E26 LED + 3 x 5W R7S LED	L82PEBEPL100M01

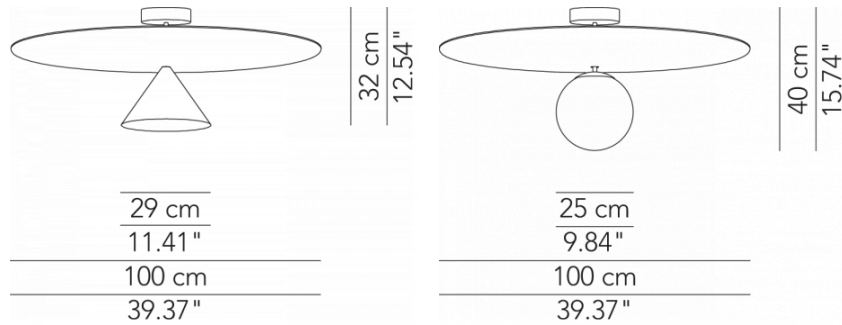

ORDERING INFO

Model (Order Code)	Finish	LED	Remote Driver Options
		<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming

 Fixture comes with a 4" backplate that mounts to a standard junction box.

SPECIFICATION SHEET