

BRITE™ 3

LED OUTDOOR RATED

TYPE:

PROJECT NAME:

MODEL # WATT LED OPTICS FINISH VOLTAGE




DESCRIPTION:

Drive over outdoor axial spotlight with IP68 rating. AISI 316L steel ferrule; tempered glass 10 mm thick. Can be installed without draining. Provided wired with a 1.5m neoprene cable.

INSTALLATION NOTE:


Must be wired in series when two or more are wired together with same driver.

SPOT LIGHT

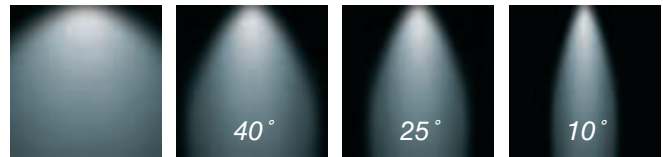


BRITE 3 Dimensions

L5CB32

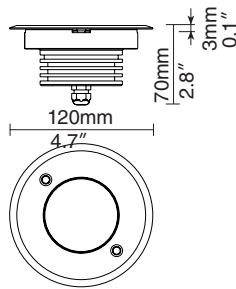

WATTAGE 5W 10W 9W (ONLY FOR RGB)


L5CB33

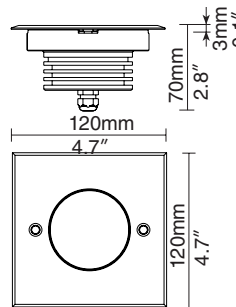

WATTAGE 5W 10W 9W (ONLY FOR RGB)

VOLTAGE 120V 220V 277V

ACCESSORIES

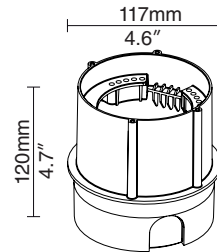

L5WC0104

LED COLORS

- 0. 5000K WHITE 5. 3000K WHITE
 - 1. BLUE 6. RGB
- (*The RGB color is only for 9W)

FINISH I. STAINLESS

OPTICS

- L. 40° M. 25°
- S. 10° D. DIFFUSED BEAM

SPECIFICATION SHEET

LEDOLOGY®

A Luminart® BRAND

WWW.LUMINARTLIGHTING.COM

BRITE™ 3
LED OUTDOOR RATED



LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM