


BLOOM™ MAXI

SPOTLIGHT

TYPE:

PROJECT NAME:

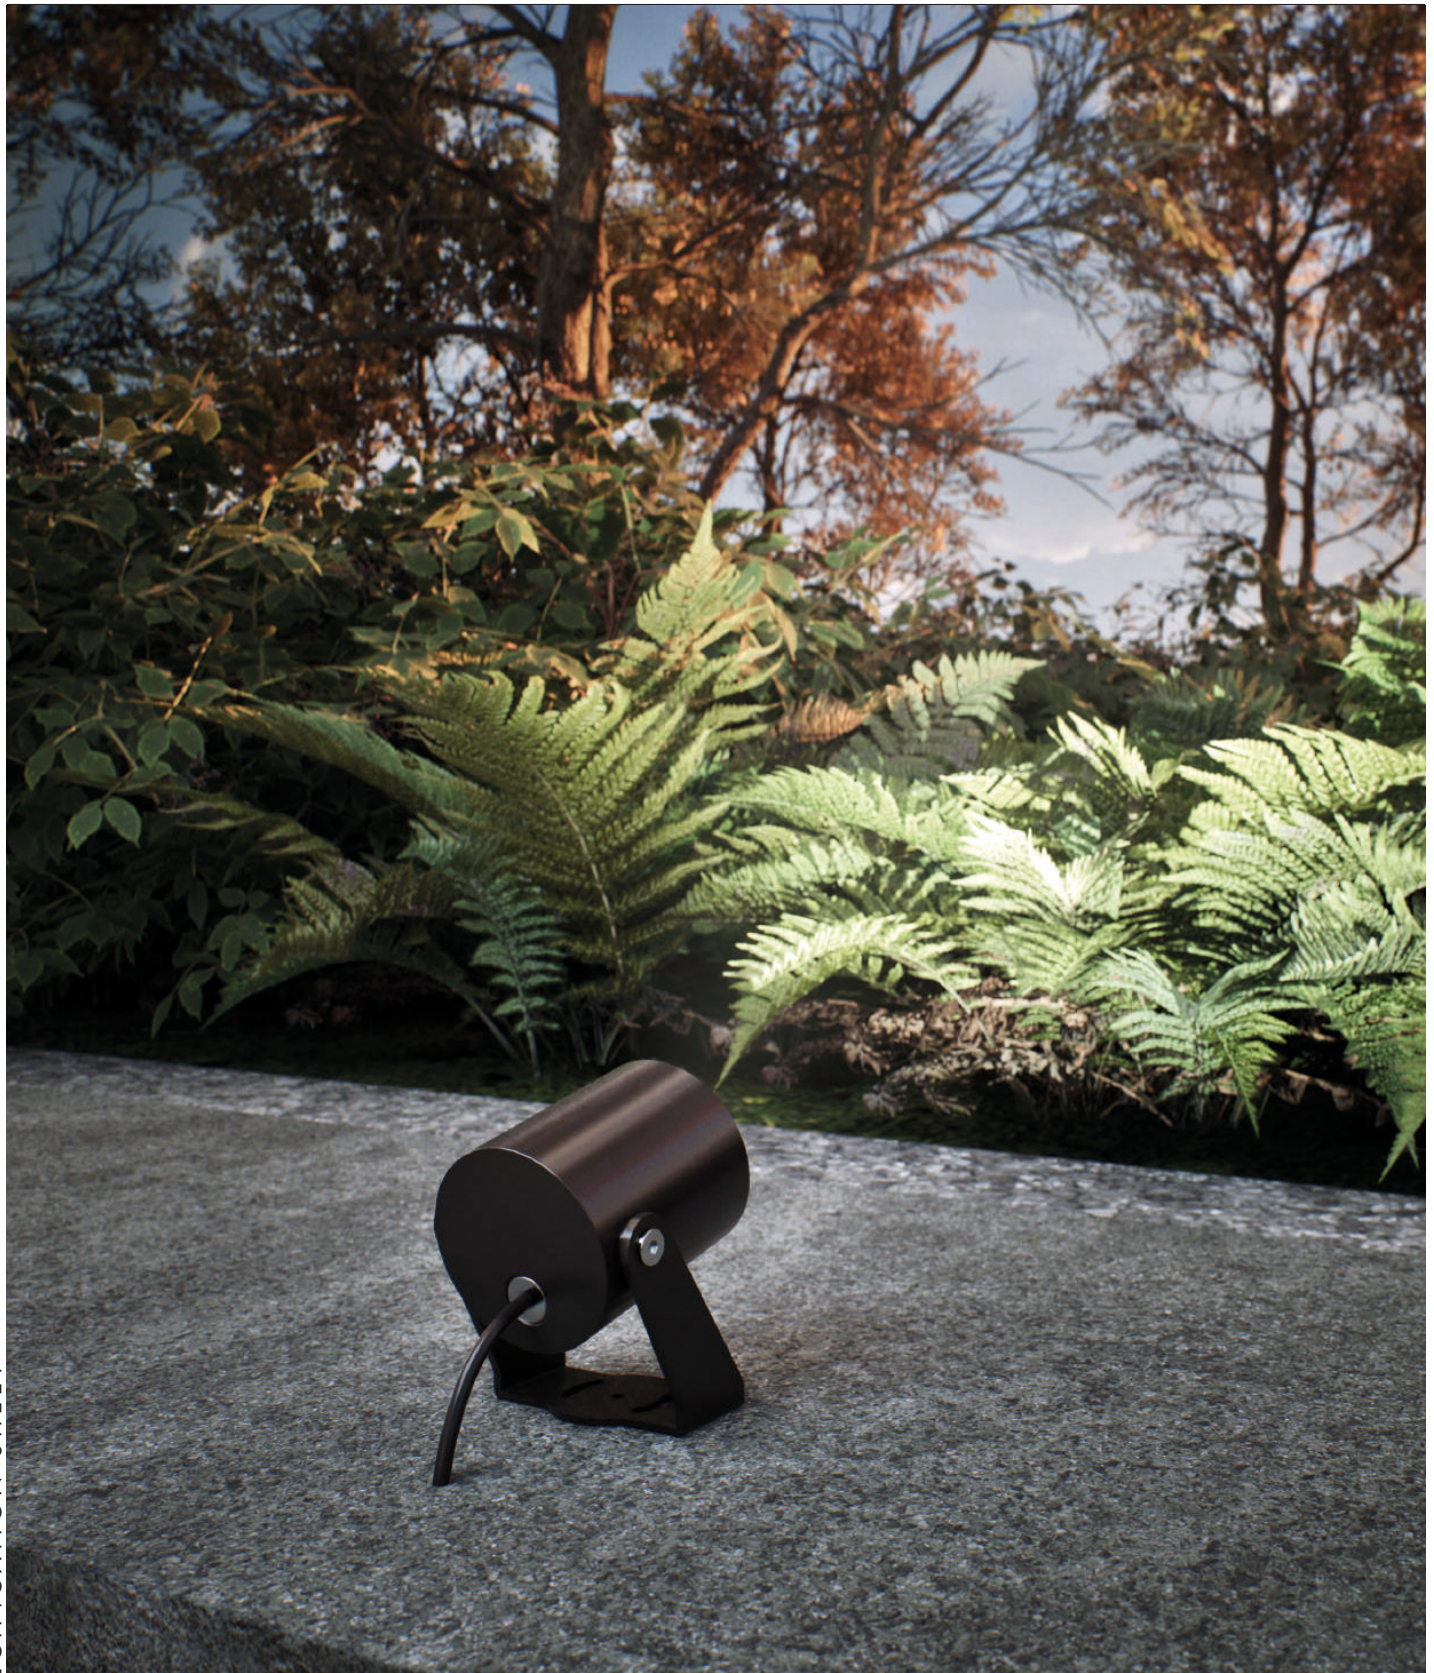

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 07/25/24

BLOOM™ MAXI

SPOTLIGHT

TYPE:

PROJECT NAME:



Fixture Specifications

Protection . IP 66 - IK 09

Body . Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance




Screen . Extra-clear transparent Glass 12mm (0.47")

Seals . EPDM rubber

Screws . Chromed Brass

Paint / Finishing . Anti-corrosive UV stabilised polyester powder

Finishes

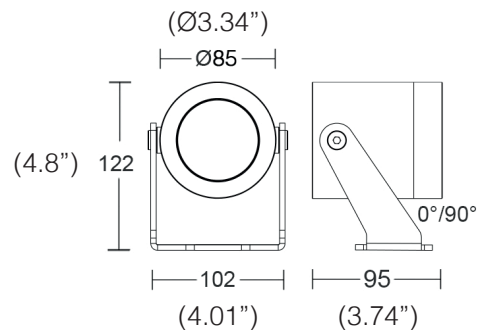

ORDERING INFO

BLOOM MAXI

Model (Order Code)	Finish Options	Optic Options	Accessories	LED	Remote Driver Options
<input type="radio"/> L90 BLOOM MAXI	<input type="radio"/> 00: Pure White <input type="radio"/> 10: White <input type="radio"/> 24: Bronze <input type="radio"/> 25: Rust <input type="radio"/> 01: Black <input type="radio"/> 30: Anthracite <input type="radio"/> 35: Slate Grey <input type="radio"/> 40: Grey <input type="radio"/> 55: Green Cool Mint	<input type="radio"/> NB: Narrow Beam 10° <input type="radio"/> MB: Medium Beam 26° <input type="radio"/> WB: Wide Beam 56°	<input type="radio"/> Spike <input type="radio"/> Branch Belt	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V (Universal Voltage)



SPECIFICATION SHEET

Luminart®










WWW.LUMINARTLIGHTING.COM
Last updated: 07/25/24


BLOOM™ MAXI

SPOTLIGHT


TYPE:

PROJECT NAME:

<i>beam</i>	<i>class</i>	<i>W</i>	<i>source</i>	<i>fixture</i>	<i>CCT LED</i>	<i>CRI</i>
 NB Spot/10°	III	15	1550 lm	1080 lm	2700K	80
 NB Spot/10°	III	15	1620 lm	1130 lm	3000K	80
 NB Spot/10°	III	15	1670 lm	1190 lm	4000K	80
 MB Flood/26°	III	15	1550 lm	1080 lm	2700K	80
 MB Flood/26°	III	15	1620 lm	1130 lm	3000K	80
 MB Flood/26°	III	15	1670 lm	1190 lm	4000K	80
 WB Wide Flood/56°	III	15	1550 lm	1000 lm	2700K	80
 WB Wide Flood/56°	III	15	1620 lm	1040 lm	3000K	80
 WB Wide Flood/56°	III	15	1670 lm	1100 lm	4000K	80

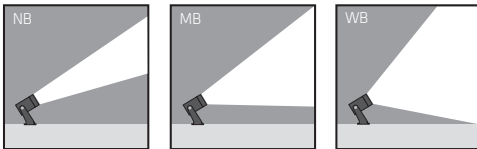

Accessories

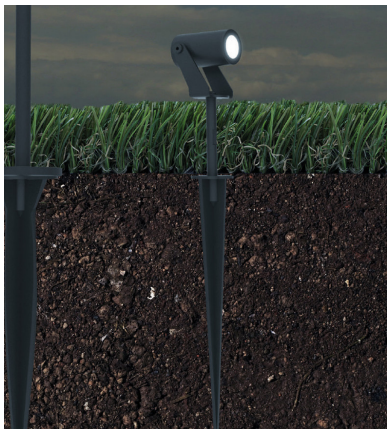

SPIKE



BRANCH
BELT



SPECIFICATION SHEET