
TYPE:

CELL[™] 4 CEILING

PROJECT NAME:



Cell is designed for modern office and public spaces. The simple square form, despite being only 50mm (1.96") high, hides a strong stream of light. Therefore, they are perfect for many hours of work at the computer, but they will also be

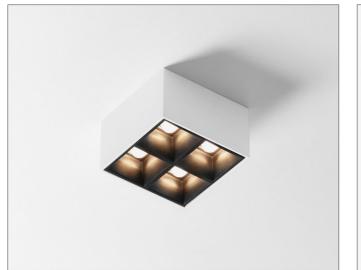

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold

good for lighting corridors or other places gathering groups of people. The series is equipped with LEDs with a high color rendering index – CRI90 and the possibility of choosing the color temperature from 3000K and 4000K.			Black	White	Dust T	erracotta	Ocean Grey	Gold
Power input, flux: LED	9.6W 870lm							
Color rendering / SDC	M: CRI 90							
Optic: 53° / 85°								
Installation: Surface mounted, ceiling						8	35 (3.3	4")
Materials: Aluminum						— .		
Ingress protection: IP:	20							
Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V			50 (1.96")					
Color Temperature: CRI 90 3000K CRI 90 4000K						`	, , , , , , , , , , , , , , , , , , , ,	0)
ORDERING INFO								
Model (Order Code)	Finish Options B: Black W: White T: Terracotta OG: Ocean Grey	Reflecter Finish B: Black W: White T: Terracotta OG: Ocean Grey D: Dust	Optic Op 53: 53° 85: 85°		LED ③ 30: 3000K ④ 40: 4000K	◯ 12	emote Drive 0V LTE 0V-277V 0-	

SPECIFICATION SHEET

TYPE:


CELLTM 16 CEILING

PROJECT NAME:

Finish options:

White

Black

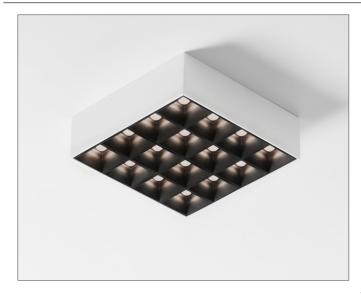

Cell is designed for modern office and public spaces. The simple square form, despite being only 50mm (1.96") high, hides a strong stream of light. Therefore, they are perfect for many hours of work at the computer, but they will also be good for lighting corridors or other places gathering groups of people. The series is equipped with LEDs with a high color rendering index – CRI90 and the possibility of choosing the color temperature from 3000K and 4000K.

Power input, flux: LED 19W 1180Im

Color rendering / SDCM: CRI 90

Optic: 53° / 85°

Installation: Surface mounted, ceiling


Materials: Aluminum


Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Color Temperature: CRI 90 3000K CRI 90 4000K

ORDERING INFO LED Model (Order Code) **Finish Options Reflecter Finish Optic Options** Remote Driver Options OL543.3352 OB: Black OB: Black ○ 53: 53° ○ 30: 3000K ○ 120V LTE OW: White OW: White ○ 85: 85° ○ 40: 4000K O 120V-277V 0-10V ◯ T: Terracotta OT: Terracotta OG: Ocean Grey OG: Ocean Grey OD: Dust OD: Dust OG: Gold OG: Gold






Ocean

Grey

Gold

Black, White, Dust, Terracotta, Ocean Grey, Gold

Dust



PROJECT NAME:



- WWW.LUMINARTLIGHTING.COM Last updated: 08/23/24

Luminart