

CILINDRO™

SUSPENSION

TYPE:

PROJECT NAME:

Finish

Fabric diffusers:



Cotton



Pleated



Pleated ribbon



Velvet



Washable



Lycra

Fabric lampshade



IP20

SPECIFICATION SHEET



Canopy detail

* on demand

** cable on measure

Luminart®

WWW.LUMINARTLIGHTING.COM

CILINDRO™

SUSPENSION

TYPE:

PROJECT NAME:

Diffuser finishes



Cotton



Cod. 300
Ivory



Cod. 301
White



Cod. 302
Sand



Cod. 303
Golden yellow



Cod. 315
Orange



Cod. 328
Gourd



Cod. 305
Lobate pink



Cod. 306
Red



Cod. 327
Lavender



Cod. 320
Mallow



Cod. 321
Periwinkle



Cod. 326
Navy blue



Cod. 319
Teal



Cod. 316
Green




Cod. 323
Sage



Cod. 318
Moss



Cod. 317
Dove colour



Cod. 324
Ecrú



Cod. 314
Brown



Cod. 312
Grey



Cod. 310
Anthracite



Cod. 313
Black



Velvet/
Soft velvet



Cod. 450
Ivory



Cod. 451
Pastel purple



Cod. 452
Old Red



Cod. 453
Teal-Green



Cod. 454
Grey



Lycra



Cod. 250
White



Cod. 263
Sand



Cod. 264
Yellow



Cod. 252
Grey



Cod. 262
Gunmetal grey

SPECIFICATION SHEET

CILINDRO™

SUSPENSION

TYPE:

PROJECT NAME:

Diffuser Finishes



Pleated



Cod. 500
White



Cod. 513
Ivory



Cod. 501
Beige



Cod. 511
Orange



Cod. 504
Flame red



Cod. 512
Dark red



Cod. 520
Electric blue



Cod. 515
Military



Cod. 514
Hazel



Cod. 505
Brown



Cod. 516
Dark brown



Cod. 517
Red brick



Cod. 509
Light grey



Cod. 519
Dark grey



Cod. 510
Anthracite



Cod. 502
Black



Pleated Ribbon



Cod. 700
Ivory



Cod. 704
Ecru



Cod. 701
Leather



Cod. 705
Yellow



Cod. 710
Terracotta



Cod. 711
Grey



Cod. 708
Cast Iron



Washable



Cod. 616
Natural



Cod. 618
Marble



Cod. 614
Sunlime



Cod. 617
Moleskin



Cod. 613
Flanelle



UV resistant



Water and stain resistant



Easy care

SPECIFICATION SHEET

CILINDRO™

SUSPENSION

TYPE:

PROJECT NAME:

Pendant lamp - ø 60	ø 60 x 20 cm 2,2 Kg	lamp type 1xE26 LED 15W	L82CILESP060C01
	ø 60 x 20 cm 2,2 Kg	lamp type 3xE26 LED 15W	L82CILESP060C02
Pendant lamp - ø 60	ø 60 x 20 cm 2,2 Kg	lamp type 1 led module 29.3W luminous efficacy 3900 Lm light colour 2700 K cri >80	L82CILESP060C06
Pendant lamp - ø 70	ø 70 x 32 cm 3,5 Kg	lamp type 1xE26 LED 15W	L82CILESP070C01
	ø 70 x 32 cm 3,5 Kg	lamp type 3xE26 LED 15W	L82CILESP070C02
Pendant lamp - ø 70	ø 70 x 32 cm 3,5 Kg	lamp type 1 led module 29.3W luminous efficacy 3900 Lm light colour 2700 K cri >80	L82CILESP070C06

ORDERING INFO

Model (Order Code)

Finish

LED

Voltage

Dimming

- 2700K
- 3000K
- 4000K


- 120V
- 277V

- LTE (Leading/Trailing Edge Dim)
- 0-10V (0-10V)



Fixture comes with a 4" backplate that mounts to a standard junction box.

Please note: 277V is only compatible with 0-10V dimming. Screw-in bulbs are only compatible with 120V with LTE dimming.

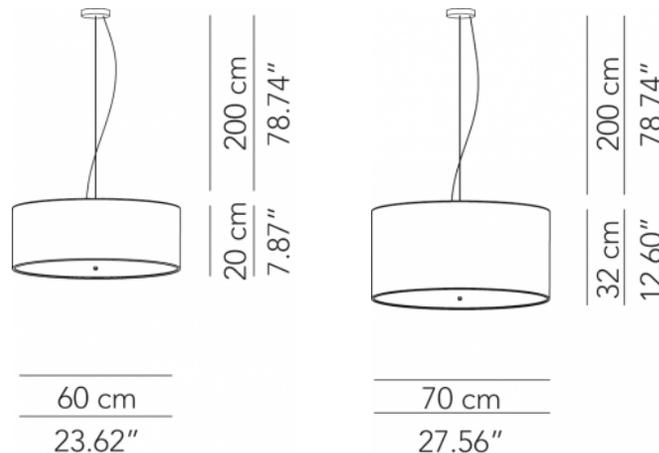

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

CILINDRO™

SUSPENSION

TYPE:

PROJECT NAME:

Pendant lamp - ø 100	ø 100 x 30 cm 7 Kg	lamp type 4xE26 LED 15W	L82CILESP100C01
Pendant lamp - ø 100	ø 100 x 30 cm 7 Kg	lamp type 1 led module 29.3W luminous efficacy 3900 Lm light colour 2700 K cri >80	L82CILESP100C08
Pendant lamp - ø 100	ø 100 x 30 cm 7 Kg	lamp type 1 led module 88.2W luminous efficacy 11780 Lm light colour 2700 K cri >80	L82CILESP100C11
Pendant lamp - ø 120	ø 120 x 30 cm 14 Kg	lamp type 4xE26 LED 15W	L82CILESP120C01
Pendant lamp - ø 120	ø 120 x 30 cm 14 Kg	lamp type 1 led module 29.3W luminous efficacy 3900 Lm light colour 2700 K cri >80	L82CILESP120C08

ORDERING INFO

Model (Order Code)

Finish

LED

Voltage

Dimming

- 2700K
- 3000K
- 4000K


- 120V
- 277V

- LTE (Leading/Trailing Edge Dim)
- 0-10V (0-10V)



Fixture comes with a 4" backplate that mounts to a standard junction box.

Please note: 277V is only compatible with 0-10V dimming. Screw-in bulbs are only compatible with 120V with LTE dimming.

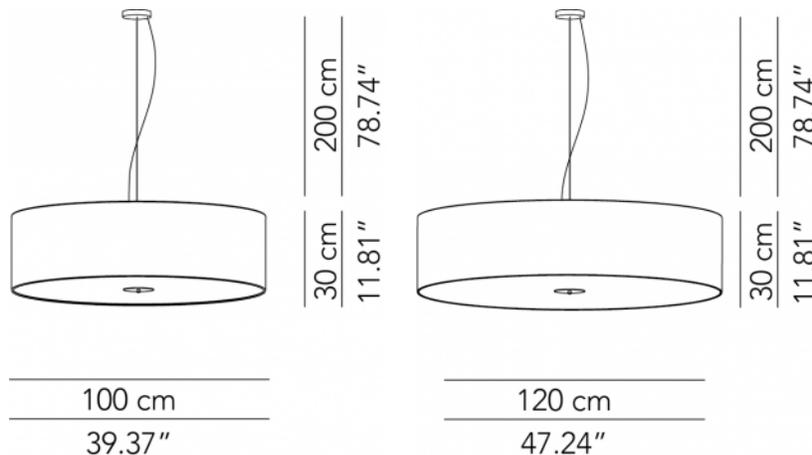

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

CILINDRO™

SUSPENSION

TYPE:

PROJECT NAME:


Pendant lamp - ø 150	ø 150 x 30 cm 25 Kg	lamp type 6xE26 LED 15W	L82CILESP150C01
Pendant lamp - ø 150	ø 150 x 30 cm 25 Kg	lamp type 1 led module 88.2W luminous efficacy 11780 Lm light colour 2700 K cri >80	L82CILESP150C08

ORDERING INFO

Model (Order Code)	Finish	LED	Voltage	Dimming
		<input type="radio"/> 2700K	<input type="radio"/> 120V	<input type="radio"/> LTE (Leading/Trailing Edge Dim)
		<input type="radio"/> 3000K	<input type="radio"/> 277V	<input type="radio"/> 0-10V (0-10V)
		<input type="radio"/> 4000K		



Fixture comes with a 4" backplate that mounts to a standard junction box.
Please note: 277V is only compatible with 0-10V dimming. Screw-in bulbs are only compatible with 120V with LTE dimming.

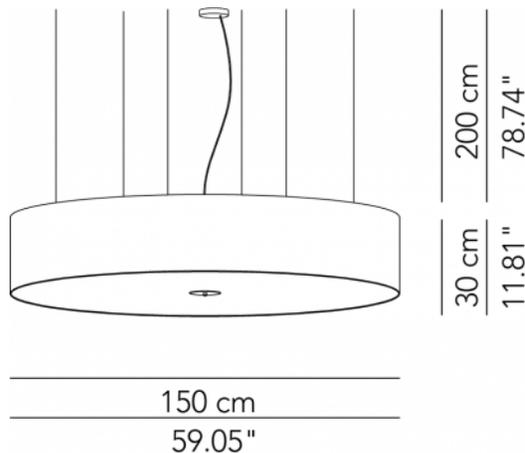

SPECIFICATION SHEET