


CORVUS™ 400

SUSPENSION 24W

TYPE:

PROJECT NAME:

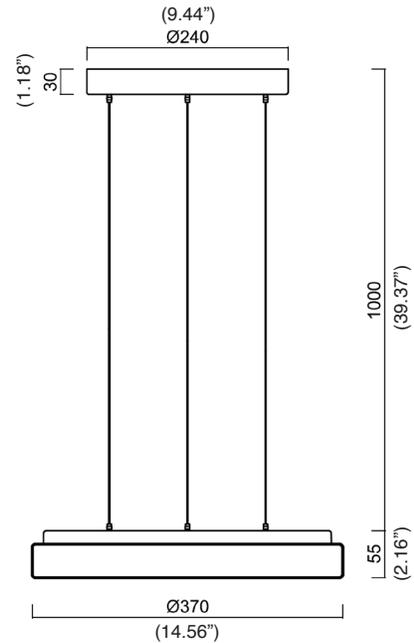

Round pendant light with shade diameter Ø370mm (14.56"). Product consists of cableless pendant opal polycarbonate shade. Shade is fixed by two-step clamp holders. Suitable for indoor use.

Power input: 24W

Hanger: 3 wire with length 1000mm (39.37")

Mounting: Pendant

Shade: Opal polycarbonate

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, black, silver

Base material: steel

Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50,000h

Input [W]	Lum. flux of light source [lm]		Lum. flux of luminaire [lm]	
	3000K	4000K	3000K	4000K
24	3320	3500	2320	2450

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L74CORVUSLE1 24W	<input type="radio"/> White Ral 9003 <input type="radio"/> Black Ral9005 <input type="radio"/> Silver Ral9006	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming <input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming



Luminart®



WWW.LUMINARTLIGHTING.COM

CORVUS™ 500

SUSPENSION 33W

TYPE:

PROJECT NAME:

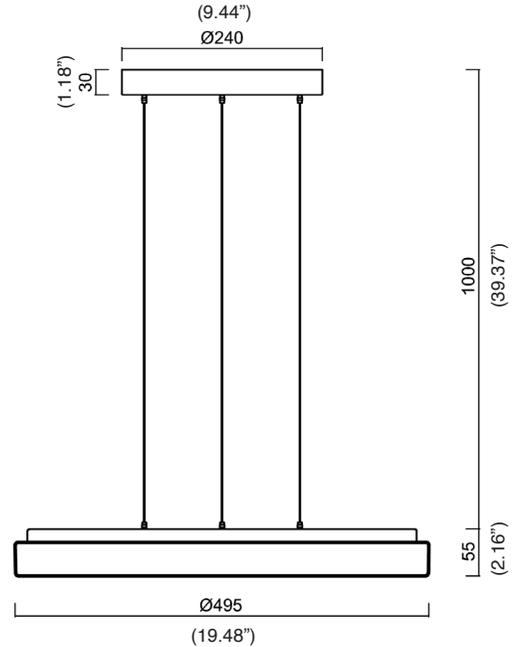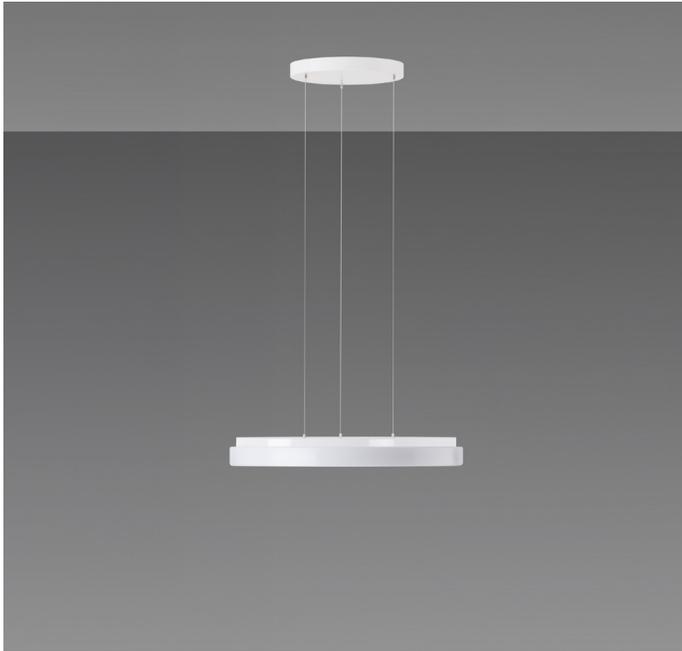

Round pendant light with shade diameter Ø495mm (19.48"). Product consists of cableless pendant opal polycarbonate shade. Shade is fixed by two-step clamp holders. Suitable for indoor use.

Power input: 33W

Hanger: 3 wire with length 1000mm (39.37")

Mounting: Pendant

Shade: Opal polycarbonate

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, black, silver

Base material: steel

Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50,000h

Input [W]	Lum. flux of light source [lm]		Lum. flux of luminaire [lm]	
	3000K	4000K	3000K	4000K
33	4750	5010	2990	3160

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L74CORVUSLE2 33W	<input type="radio"/> White Ral 9003 <input type="radio"/> Black Ral9005 <input type="radio"/> Silver Ral9006	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming <input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM