

# DAYTONA™ ROUND

SUSPENSION

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

**Luminart®**


WWW.LUMINARTLIGHTING.COM

# DAYTONA™ ROUND 600

SUSPENSION

TYPE:

PROJECT NAME:

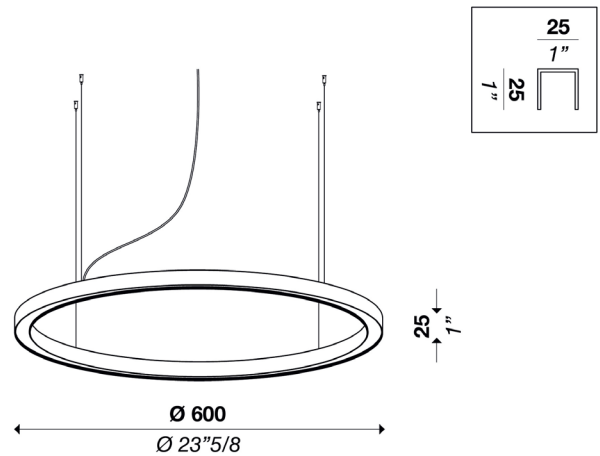

Lighting modular system with direct light. Aluminum structure in matt white, embossed black or gold finish. Round configuration with opal polycarbonate, and round structures with opal polycarbonate diffuser. Strip LED on polycarbonate diffuser.

**Power input:** 38W

**Light emission direction:** Direct

**Hanging cables:**  
Stainless steel cables standard length 2000 mm (78"3/4),  
Electric cable standard length 2500 mm (100")

**Materials:** Aluminum structure, opal polycarbonate diffuser

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V-277V

**Dimming:** Power supply compatible with 0-10V

**Structure finish:** Matt white, embossed black, gold



**Light source:** LED  
3000K: 90CRI  
4000K: 90CRI

**Degree of protection:** IP20

**Source lumens:** 4710 lm

**Delivered lumens:** 2945 lm

**Source efficacy:** 125 lm/W

SPECIFICATION SHEET

## ORDERING INFO

Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L032650360B10100	<input type="radio"/> Matt White <input type="radio"/> Embossed Black <input type="radio"/> Gold	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming




# DAYTONA™ ROUND 900

SUSPENSION

TYPE:

PROJECT NAME:

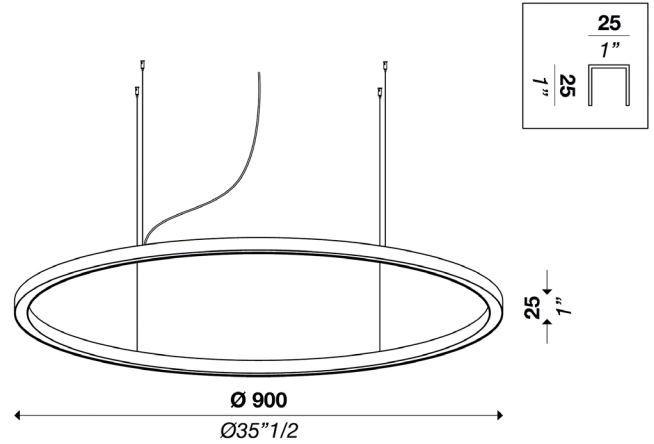

Lighting modular system with direct light. Aluminum structure in matt white, embossed black or gold finish. Round configuration with opal polycarbonate, and round structures with opal polycarbonate diffuser. Strip LED on polycarbonate diffuser.

**Power input:** 57W

**Light emission direction:** Direct

**Hanging cables:**  
Stainless steel cables standard length 2000 mm (78"3/4),  
Electric cable standard length 2500 mm (100")

**Materials:** Aluminum structure, opal polycarbonate diffuser

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V-277V

**Dimming:** Power supply compatible with 0-10V

**Structure finish:** Matt white, embossed black, gold



**Light source:** LED  
3000K: 90CRI  
4000K: 90CRI

**Degree of protection:** IP20

**Source lumens:** 7065 lm

**Delivered lumens:** 4418 lm

**Source efficacy:** 125 lm/W

SPECIFICATION SHEET

## ORDERING INFO


Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L032650390B10100	<input type="radio"/> Matt White <input type="radio"/> Embossed Black <input type="radio"/> Gold	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming



# DAYTONA™ ROUND 1200 TYPE:

SUSPENSION

PROJECT NAME:

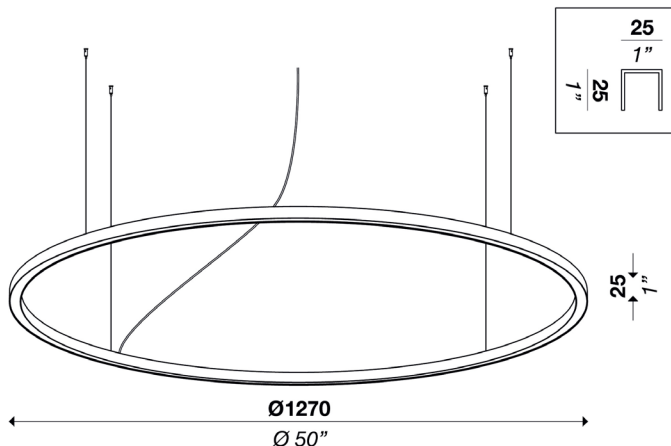

Lighting modular system with direct light. Aluminum structure in matt white, embossed black or gold finish. Round configuration with opal polycarbonate, and round structures with opal polycarbonate diffuser. Strip LED on polycarbonate diffuser.

**Power input:** 80W

**Light emission direction:** Direct

**Hanging cables:**

Stainless steel cables standard length 2000 mm (78"3/4), Electric cable standard length 2500 mm (100")

**Materials:** Aluminum structure, opal polycarbonate diffuser

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V-277V

**Dimming:** Power supply compatible with 0-10V

**Structure finish:** Matt white, embossed black, gold



**Light source:** LED

3000K: 90CRI  
4000K: 90CRI

**Degree of protection:** IP20

**Source lumens:** 9970 lm

**Delivered lumens:** 6200 lm

**Source efficacy:** 125 lm/W

SPECIFICATION SHEET

**ORDERING INFO**


Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L032650312B10100	<input type="radio"/> Matt White <input type="radio"/> Embossed Black <input type="radio"/> Gold	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming



# DAYTONA™ ROUND 1800 TYPE:

SUSPENSION

PROJECT NAME:

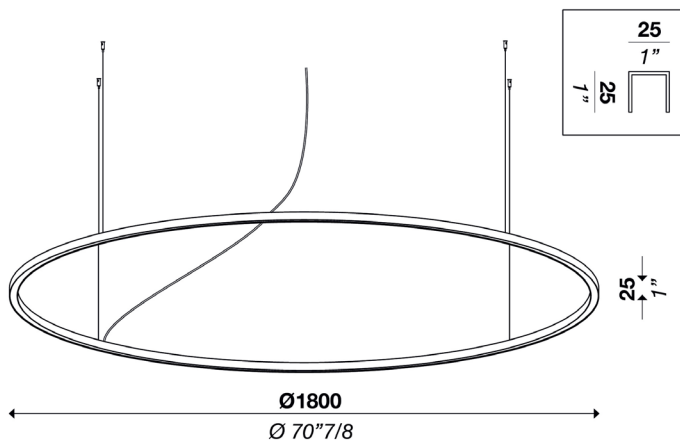

Lighting modular system with direct light. Aluminum structure in matt white, embossed black or gold finish. Round configuration with opal polycarbonate, and round structures with opal polycarbonate diffuser. Strip LED on polycarbonate diffuser.

**Power input:** 113W

**Light emission direction:** Direct

**Hanging cables:**

Stainless steel cables standard length 2000 mm (78 3/4),  
Electric cable standard length 2500 mm (100")

**Materials:** Aluminum structure, opal polycarbonate diffuser

**Electrical:** High efficiency electronic power supply, rated  
50,000 hours 120V-277V

**Dimming:** Power supply compatible with 0-10V

**Structure finish:** Matt white, embossed black, gold



**Light source:** LED

3000K: 90CRI

4000K: 90CRI

**Degree of protection:** IP20

**Source lumens:** 14130 lm

**Delivered lumens:** 8758 lm

**Source efficacy:** 125 lm/W

SPECIFICATION SHEET

## ORDERING INFO

Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L032650318B10100	<input type="radio"/> Matt White <input type="radio"/> Embossed Black <input type="radio"/> Gold	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming

