


# DELIA™ T400

SUSPENSION

TYPE:

PROJECT NAME:

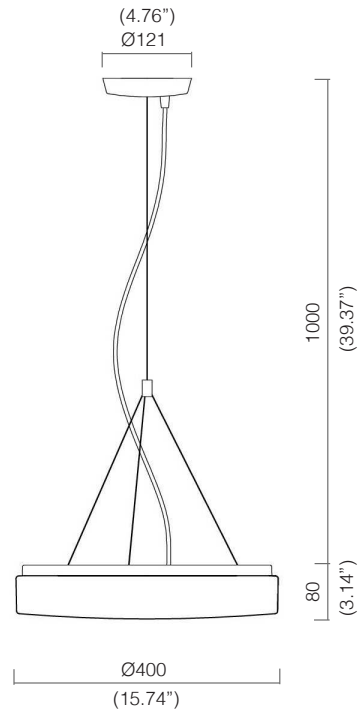

Round ceiling or wall light with shade diameter Ø400mm (15.74"). Product consists of wire pendant and opal polycarbonate shade. Shade is fixed by two-step clamp holders. Suitable for indoor and outdoor use.

**Power input:** 27W

**Hanger:** Wire with length 1000mm (39.37")

**Mounting:** Pendant

**Shade:** Opal polycarbonate

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V-277V

**Dimming:** Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

**Finish:** White

**Base material:** Steel

**Source:** LED module

3000K: 80CRI

4000K: 80CRI

**Lumen maintenance:** >80% of initial lumens at 50,000h

| Input [W] | Lum. flux of light source [lm] |       | Lum. flux of luminaire [lm] |       |
|-----------|--------------------------------|-------|-----------------------------|-------|
|           | 3000K                          | 4000K | 3000K                       | 4000K |
| 27        | 3690                           | 3890  | 2580                        | 2720  |

SPECIFICATION SHEET

## ORDERING INFO

| Model (Order Code)                   | Structure Finish                     | LED  | Driver Options   |
|--------------------------------------|--------------------------------------|--|--|
| <input type="radio"/> F74DELIAT2 27W | <input type="radio"/> White Ral 9003 | <input type="radio"/> 3000K<br><input type="radio"/> 4000K | <input type="radio"/> 120V Phase Dimming<br><input type="radio"/> 120V 0-10V Dimming<br><input type="radio"/> 277V 0-10V Dimming |



**Luminart®**


WWW.LUMINARTLIGHTING.COM

# DELIA™ T500

SUSPENSION

TYPE:

PROJECT NAME:

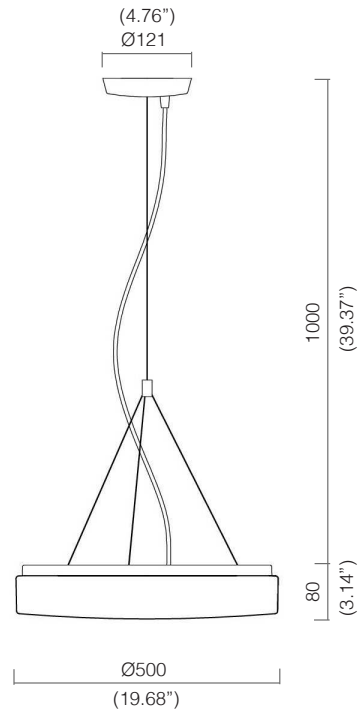

Round ceiling or wall light with shade diameter Ø500mm (19.86"). Product consists of wire pendant and opal polycarbonate shade. Shade is fixed by two-step clamp holders. Suitable for indoor and outdoor use.

**Power input:** 33W

**Hanger:** Wire with length 1000mm (39.37")

**Mounting:** Pendant

**Shade:** Opal polycarbonate

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V-277V

**Dimming:** Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

**Finish:** White

**Base material:** Steel

**Source:** LED module

3000K: 80CRI

4000K: 80CRI

**Lumen maintenance:** >80% of initial lumens at 50,000h

| Input [W] | Lum. flux of light source [lm] |       | Lum. flux of luminaire [lm] |       |
|-----------|--------------------------------|-------|-----------------------------|-------|
|           | 3000K                          | 4000K | 3000K                       | 4000K |
| 33        | 15310                          | 16000 | 8420                        | 8800  |

SPECIFICATION SHEET

## ORDERING INFO

| Model (Order Code)                   | Structure Finish                     | LED  | Driver Options   |
|--------------------------------------|--------------------------------------|--|--|
| <input type="radio"/> F74DELIAT3 33W | <input type="radio"/> White Ral 9003 | <input type="radio"/> 3000K<br><input type="radio"/> 4000K | <input type="radio"/> 120V Phase Dimming<br><input type="radio"/> 120V 0-10V Dimming<br><input type="radio"/> 277V 0-10V Dimming |



**Luminart®**

WWW.LUMINARTLIGHTING.COM