

DITTO™

SUSPENSION OR CEILING

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

■ DITTO

Ø150

Ø380

Ø700

Design: Serge and Robert Cornelissen

A pure shape and versatility identify Ditto, hanging luminaire for diffuse lighting complete with a high efficiency LED light source and driver. It is made from epoxy powder coated finish aluminum stabilized with UV rays and provided with a satin polyethylene light diffuser. Cables for suspension in galvanized steel with a 1.2 mm diameter, 200 cm of three wire electrical cable 3x0,75 mm² and ceiling attachment in painted steel included. Dimmable version and SA emergency version (1hr of autonomy) available on request. The degree of protection against the penetration of dust, solid objects and liquids is IP40.

LEDODOLOGY®

A **Luminart**® BRAND

WWW.LEDOLOGY.COM

DITTO™

SUSPENSION OR CEILING

TYPE:

PROJECT NAME:


DITTO Ø150


code	W	Lm (3000K)	SL	AL	lifetime
L258471*	max 32	-	E27**	N/A	-
L258671...	12	1870	 LED	incl.	60.000h L80/B10



*do not use halogen or incandescent lamps

**lamp not included

- SL see table
- AL see table
-  120° (LED version)
- TC .30 per 3000K / .40 per 4000K
- IP 40
- CRI >80 (LED version)
- SDCM 3 (LED version)
- EEI A++ (LED version)
- RG 0
- 03 Glossy black
- 08 Frosted white
- 12 Chrome painted
- 36 Glossy dove grey

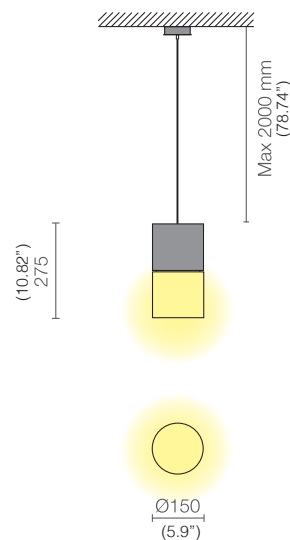

SPECIFICATION SHEET

DITTO™

SUSPENSION OR CEILING

TYPE:

PROJECT NAME:


DITTO Ø380

code	W	Lm (3000K)	lifetime	L80/B20
L258672...	25	3610	50.000h	L80/B20



/DIMM2 DALI
/DIMM3 0-10V

- SL LED
- AL *included*
- 120°
- TC .30 per 3000K / .40 per 4000K
- IP 40
- CRI >80
- SDCM 3
- EEI A++
- RG 0
- 03 *Glossy black*
- 08 *Frosted white*
- 12 *Chrome painted*
- 36 *Glossy dove grey*

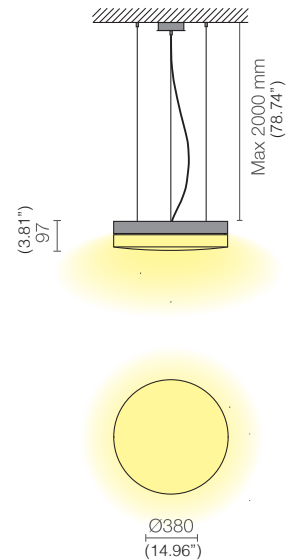

SPECIFICATION SHEET

LEDODOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM

DITTO™

SUSPENSION OR CEILING

TYPE:

PROJECT NAME:

DITTO Ø700

code	W	Lm (3000K)	lifetime	
L258674.45...	45	7280	60.000h	L80/B10
L258674.65...	65	9920	50.000h	L80/B10



/DIMM2 DALI
/DIMM3 0-10V

SL LED

AL *included*

120°

TC .30 per 3000K / .40 per 4000K

IP 40

CRI >80

SDCM 3

EEL A++



RG 0

03 *Glossy black*

08 *Frosted white*

12 *Chrome painted*

36 *Glossy dove grey*

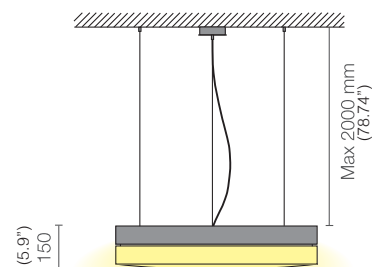

SPECIFICATION SHEET

LEDODOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM