

# EVER AND EVER™

SUSPENSION

TYPE:

PROJECT NAME:



## ORDERING INFO

Model	Length	Direct	Indirect	LED	Body Finish	Diffuser	Dimming	Voltage
<input type="radio"/> L4500DI (Direct Only)	<input type="radio"/> 02: 2' <input type="radio"/> 04: 4'	<input type="radio"/> 5W/FT <input type="radio"/> 7W/FT	<input type="radio"/> 5W/FT <input type="radio"/> 7W/FT	<input type="radio"/> 30K (3000K)	<input type="radio"/> 01: White <input type="radio"/> 02: Black	<input type="radio"/> FD (Frosted)	<input type="radio"/> LTE (Leading/ Trailing Edge Dim)	<input type="radio"/> 120V <input type="radio"/> 277V
<input type="radio"/> L4500DIIN (Direct + Indirect)	<input type="radio"/> 06: 6' <input type="radio"/> 08: 8'	<input type="radio"/> 10W/FT <input type="radio"/> Empty	<input type="radio"/> 10W/FT <input type="radio"/> Empty	<input type="radio"/> 35K (3500K)	<input type="radio"/> 10: Grey			
<input type="radio"/> L4500IN (Indirect Only)	<input type="radio"/> 16: 16' <input type="radio"/> 24: 24'			<input type="radio"/> 40K (4000K)			<input type="radio"/> 010V (0-10V)	

## SPECIFICATIONS

### Design

Slim profile pendant luminaire provides direct and or indirect lighting. Available as single modules or continuous runs suitable for interior application where general lighting is required.

### Construction

Body: Extruded aluminum profile with die-cast end caps. Diffuser: PMMA frosted acrylic.  
Mounting: Stainless steel suspension cable, clear power cable and die-cast canopy.

### Light Source

High efficiency Osram Duris®E5 JDSR (LM-80 tested) 3000K /3500K /4000K 85 cri typical (min>80CRI). Lumen maintenance: 70% of initial lumens at 100 000 hours (L70).

### Optics

General lighting optics.

### Electrical

High efficiency electronic power supply, rated 100 000 hours 120-277V. Luminaire is supplied standard with 2 circuits (except for 2ft unit)

### Dimming

Optional power supply compatible with 0-10V, Hi-lume® BUS supply dimming. Supplied standard with 1 circuit only, but 2 circuits available upon request, with additional canopy.

### Mounting

5' field adjustable suspension cable, to be installed on a standard 4" junction box.

### Finish

White RAL9003, black RAL9004 or gray RAL9006 The canopy is supplied white, other finishes available on demand.

SPECIFICATION SHEET

**Luminart®**


WWW.LUMINARTLIGHTING.COM

# EVER AND EVER™

SUSPENSION

TYPE:

PROJECT NAME:

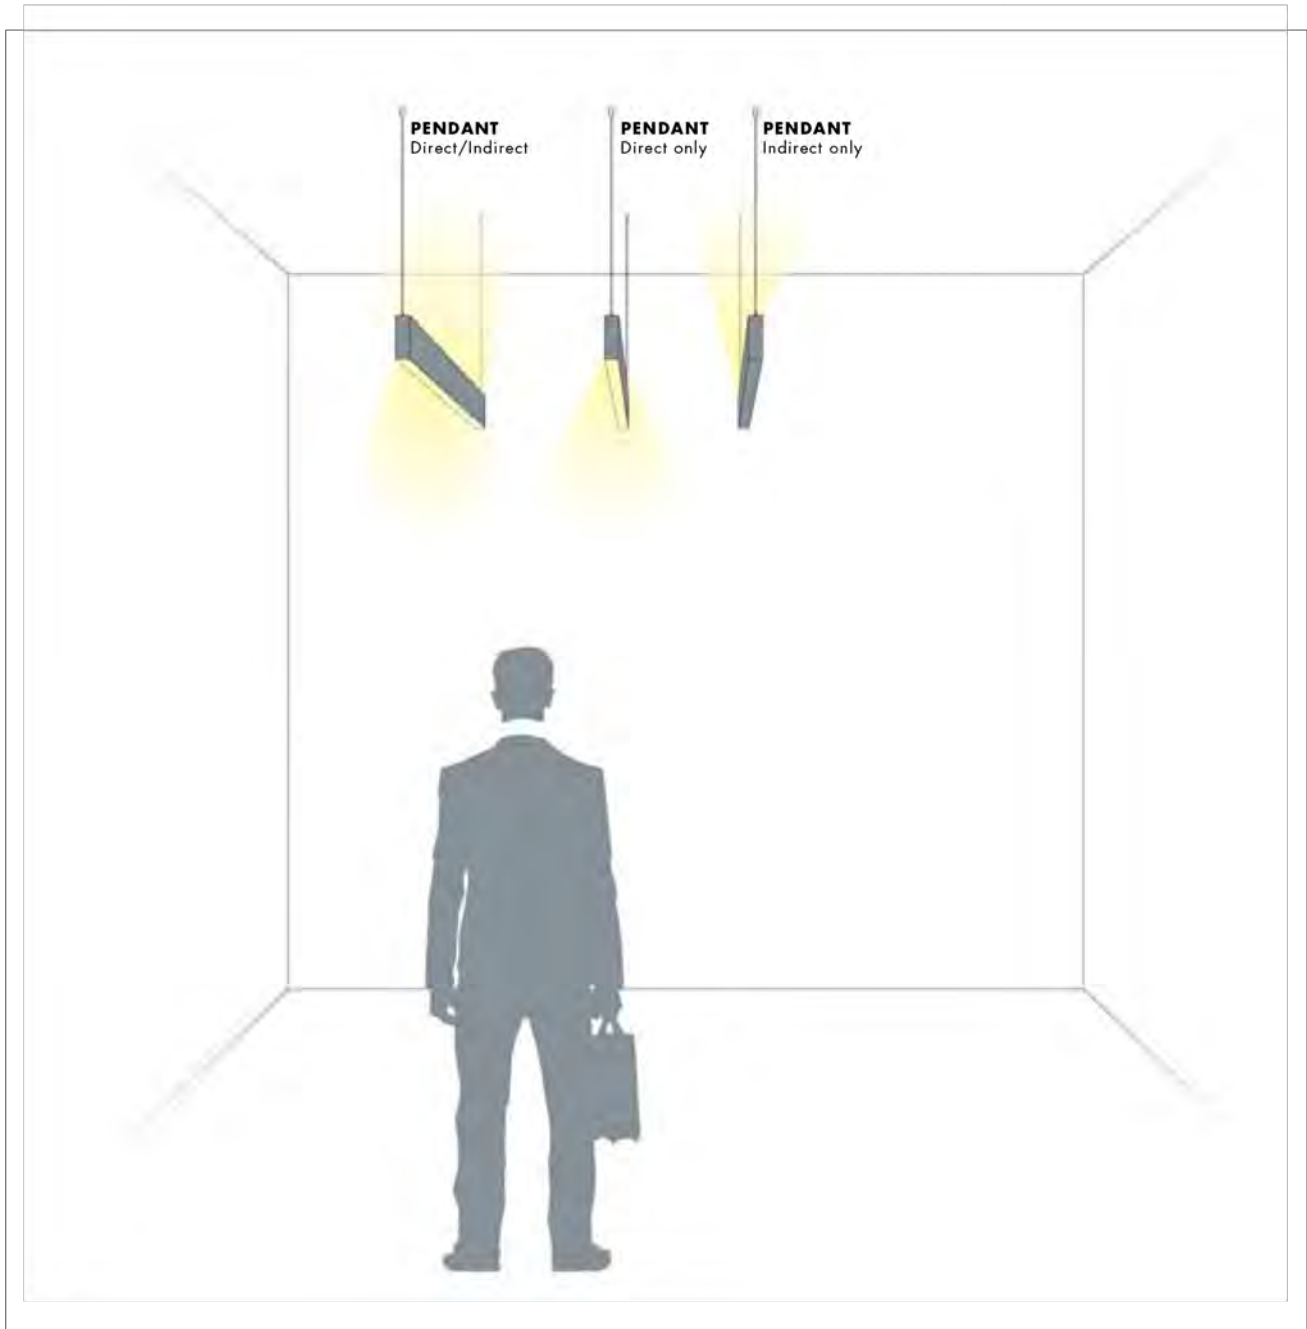



SPECIFICATION SHEET

# EVER AND EVER™

SUSPENSION

TYPE:


PROJECT NAME:

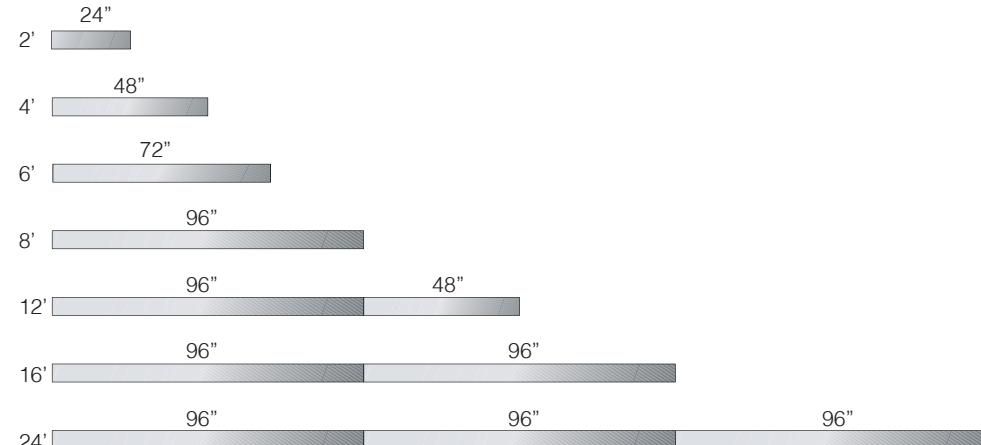L.4500	LENGTH
<p>Pendant</p> 	 <p>For other lengths contact factory All fixtures are supplied with five (5) feet aircraft cables as standard.</p>

## LIGHT OUTPUT DATA

	LOAD	3000K	
	W/ft	lm/ft	lm/W
5W (Base output)	5 W/ft	510	102
7W (Medium output)	7 W/ft	710	94
10W (High output)	10 W/ft	935	89

### 3000K

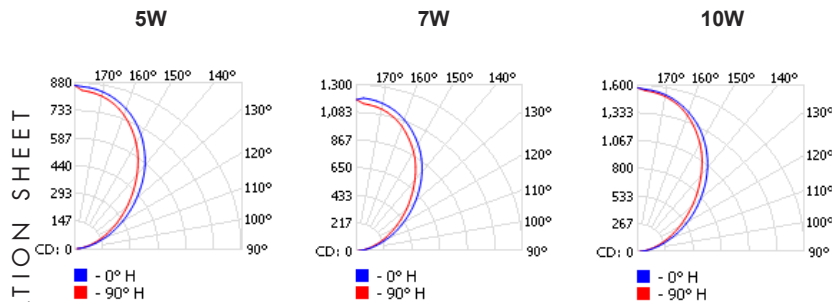

## MULTIPLIER TABLE

Color options	Multiplier
3000K - 85CRI	1
3500K - 85CRI	1,09
4000K - 85CRI	1,19

# EVER AND EVER™

SUSPENSION

TYPE:

PROJECT NAME:

## ACCESSORIES AND MISCELLANEOUS OPTIONS

### ACCESSORIES (TO BE ORDERED SEPARATELY) \*for installation consult the instruction sheet

- L3637 - Accessory for T-Bar Mounting (White)  
Kits of two anchors



Length	# Of kits needed
Up to 8'	1
8' to 24'	2
25' to 40'	3
41' to 56'	4
57' to 72'	5
73' to 88'	6
89' to 104'	7


### INSTALLATION OPTIONS

Standard option



The aircraft cable suspension and clear power cable terminate at the canopy.


Alternate option (available by request)



The aircraft cable suspension terminates in the ceiling while the clear power cable and the canopy cover can be located independently

#### • Frosted Diffuser

Made of extruded PMMA acrylic with a proprietary frosting technique. The frosted diffuser is intended to be used in Direct, Indirect or Direct/Indirect lighting distributions for both the Pendant and Ever & Ever wall to ensure the desired halo lighting effect.



SPECIFICATION SHEET







# EVER AND EVER™


SUSPENSION

TYPE:


PROJECT NAME:

## CUSTOM CONFIGURATION OPTIONS


L.4500	CONFIGURATION
Pendant 	<p> L: L Shape</p> <p> Z: Z Shape</p> <p> U: U Shape</p> <p>For other layouts contact factory. All fixtures are supplied with five (5) foot aircraft cables as standard.</p>











"L" : Configuration



"Z" : Configuration




"U" : Configuration

L.4500	CONFIGURATION
Pendant 	<p> 4X4 : 4' X 4'</p> <p> 4X8 : 4' X 8'</p> <p> 4X12 : 4' X 12'</p> <p> 4X16 : 4' X 16'</p> <p> 8X8 : 8' X 8'</p> <p> 8X12 : 8' X 12'</p> <p> 8X16 : 8' X 16'</p> <p>For other configuration contact factory. All fixtures are supplied with five (5) foot aircraft cables as standard.</p>


• Angle

All angle specifications are supplied with the use of a very precise diecast joiner, ensuring a tight fit when creating L, Z, U, Rectangular and Square configurations.



• Frosted Diffuser

Made of extruded PMMA acrylic with a proprietary frosting technique. The frosted diffuser is intended to be used in Direct, Indirect or Direct/Indirect lighting distributions for both the Pendant and Ever & Ever wall to ensure the desired halo lighting effect.



SPECIFICATION SHEET