


# FAUNO™

BOLLARD

TYPE:


PROJECT NAME:



FAUNO L350.60 S

9W


 kg 1,10 (2.42 lbs)

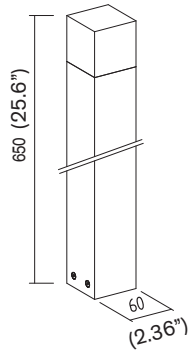

FAUNO L650.60 M

9W

 kg 1,51 (3.32 lbs)

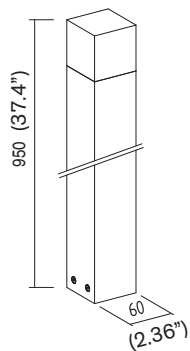

FAUNO L950.60 L

9W

 kg 1,91 (4.21 lbs)

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM  
Last updated: 12/10/20

# FAUNO™

BOLLARD

TYPE:

PROJECT NAME:

## ELECTRICAL FEATURES

WATTAGE	9W
VOLTAGE	120V, 277V
DRIVER	Integrated
DIMMING	0-10V, Leading/Trailing Edge
CONNECTION	Mains voltage

## LIGHTING FEATURES

COLOUR TEMPERATURE	2700K, 3000K, 4000K
CRI	>90
OPTICS	360°
TOTAL NOMINAL LUMENS	784lm (2700K) 838lm (3000K) 902lm (4000K)
AVERAGE LED LIFE	50,000h L80 B10

## MECHANICAL FEATURES

WEIGHT	S version: <b>1.1kg</b> - M version: <b>1.51kg</b> - L version: <b>1.91kg</b>
FINISHES	White, Grey, Black, Corten, Anthracite
MATERIAL	Varnished aluminum body, AISI 304 stainless steel base, opal PMMA diffuser

## GENERAL FEATURES

OPERATING TEMPERATURE	-10°C + 45°C
INGRESS PROTECTION	IP65
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C.
SCREEN TEMPERATURE	40° @ Ta = 25°
WALKOVER	/
DRIVE OVER	/
POWER CABLES	Provided with 50 cm cable
PHOTOBIOLOGICAL SAFETY	GR1



SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM  
Last updated: 12/10/20