
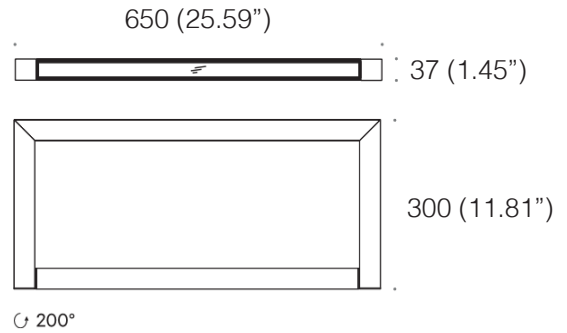


# FMC+™ 3X6

CEILING

TYPE:

PROJECT NAME:

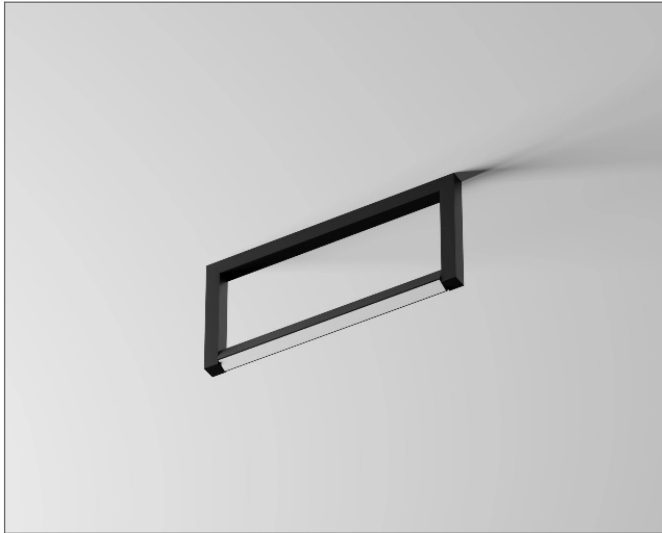

FMC+ features a movable lower lamp profile, providing the ability to change the direction of light or illuminate the ceiling. Soft light is ensured by a shade made of opal PMMA or microprismatic satin.

**Color rendering:** CRI 90

**Materials:** Aluminum body, polycarbonate


**Ingress protection:** IP20

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V-277V


**Input [W]** 28W

Lum. flux of light source [lm]	Opal PMMA	1430 lm
	Microprismatic	1790 lm


**Finish options:**

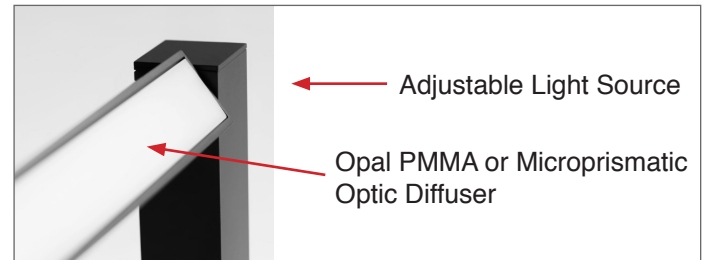

**Optic diffuser options:**



Microprismatic



Opal PMMA

SPECIFICATION SHEET

## ORDERING INFO

L543.2139

Model (Order Code)	Structure Finishes	Optic Diffuser Options	LED	Dimming Options
<input type="radio"/> L543.2139 28W	<input type="radio"/> 12: Black <input type="radio"/> 13: White <input type="radio"/> 21: Terracotta <input type="radio"/> 22: Ocean Grey <input type="radio"/> 23: Dust <input type="radio"/> 80: Gold	<input type="radio"/> OP: Opal PMMA <input type="radio"/> MP: Microprismatic	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE Remote driver <input type="radio"/> 120V-277V 0-10V Remote driver <input type="radio"/> 120V LTE Integral driver <input type="radio"/> 120V-277V 0-10V Integral driver

**Installation Note:** Fixture with integral driver is installed to a 4x4" backplate.





# FMC+™ 3X9

CEILING

TYPE:

PROJECT NAME:

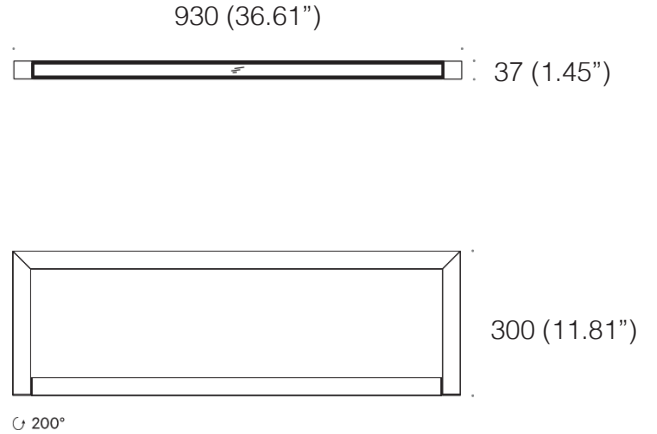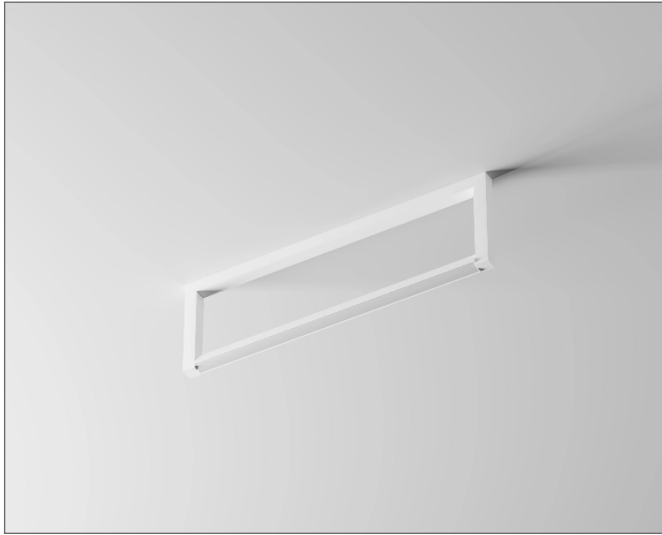

FMC+ features a movable lower lamp profile, providing the ability to change the direction of light or illuminate the ceiling. Soft light is ensured by a shade made of opal PMMA or microprismatic satin.

**Color rendering:** CRI 90

**Materials:** Aluminum body, polycarbonate


**Ingress protection:** IP20

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V-277V


**Input [W]** 39W

Lum. flux of light source [lm]	Opal PMMA	2150 lm
	Microprismatic	2690 lm


**Finish options:**

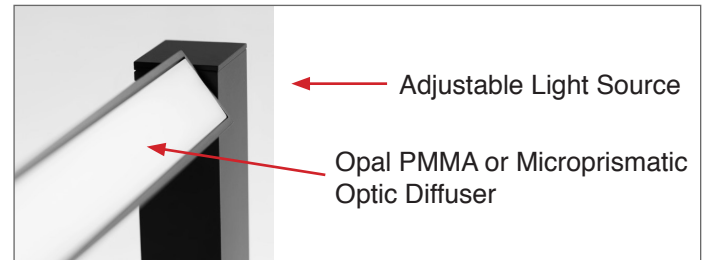

**Optic diffuser options:**



Microprismatic



Opal PMMA

SPECIFICATION SHEET

## ORDERING INFO

L543.2141

Model (Order Code)	Structure Finishes	Optic Diffuser Options	LED	Dimming Options
<input type="radio"/> L543.2141 39W	<input type="radio"/> 12: Black <input type="radio"/> 13: White <input type="radio"/> 21: Terracotta <input type="radio"/> 22: Ocean Grey <input type="radio"/> 23: Dust <input type="radio"/> 80: Gold	<input type="radio"/> OP: Opal PMMA <input type="radio"/> MP: Microprismatic	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE Remote driver <input type="radio"/> 120V-277V 0-10V Remote driver <input type="radio"/> 120V LTE Integral driver <input type="radio"/> 120V-277V 0-10V Integral driver

**Installation Note:** Fixture with integral driver is installed to a 4x4" backplate.





# FMC+™ 6X6

CEILING

TYPE:

PROJECT NAME:

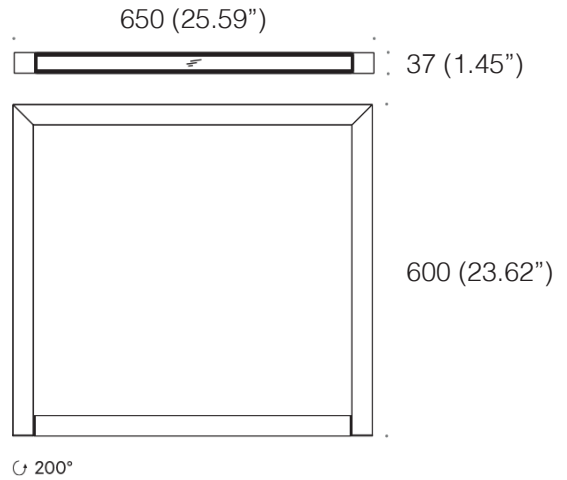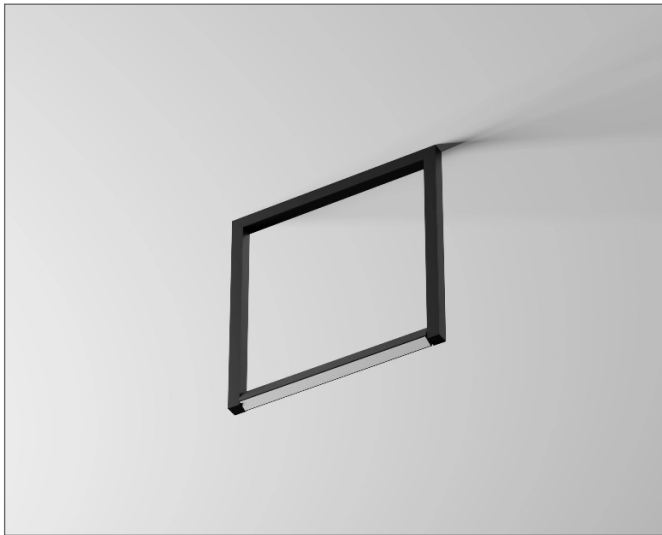

FMC+ features a movable lower lamp profile, providing the ability to change the direction of light or illuminate the ceiling. Soft light is ensured by a shade made of opal PMMA or microprismatic satin.

**Color rendering:** CRI 90

**Materials:** Aluminum body, polycarbonate


**Ingress protection:** IP20

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V-277V


**Input [W]** 28W

Lum. flux of light source [lm]	Opal PMMA	1430 lm
	Microprismatic	1790 lm

**Finish options:**

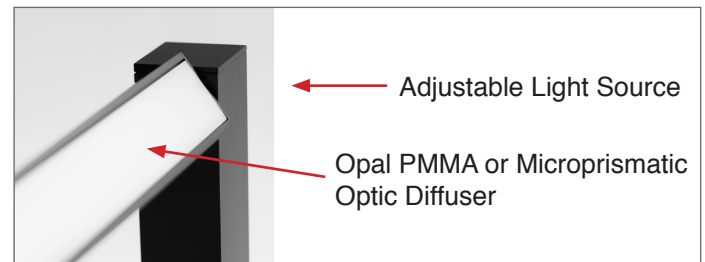

**Optic diffuser options:**

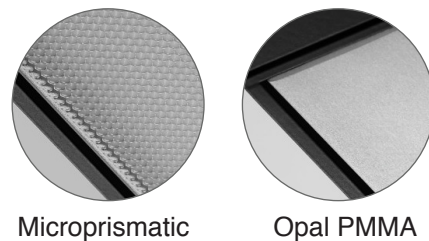

SPECIFICATION SHEET

## ORDERING INFO

L543.2143

Model (Order Code)	Structure Finishes	Optic Diffuser Options	LED	Dimming Options
<input type="radio"/> L543.2143 28W	<input type="radio"/> 12: Black <input type="radio"/> 13: White <input type="radio"/> 21: Terracotta <input type="radio"/> 22: Ocean Grey <input type="radio"/> 23: Dust <input type="radio"/> 80: Gold	<input type="radio"/> OP: Opal PMMA <input type="radio"/> MP: Microprismatic	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE Remote driver <input type="radio"/> 120V-277V 0-10V Remote driver <input type="radio"/> 120V LTE Integral driver <input type="radio"/> 120V-277V 0-10V Integral driver

**Installation Note:** Fixture with integral driver is installed to a 4x4" backplate.



