

FURIN™

SUSPENSION

TYPE:


PROJECT NAME:



Lens beam



Mounting system



Light Source	LED
Power	3 Watt
Lumen	150
CRI	90


Textile Finish Custom Finish

02 White 03 Red

Satin Finish

20 Graphite 43 Silver 62 Black 64 Bronze 65 Champagne

Customize your lamps with your favourite colour. Choose from any RAL, Pantone or NCS colour. Contact us for more details.

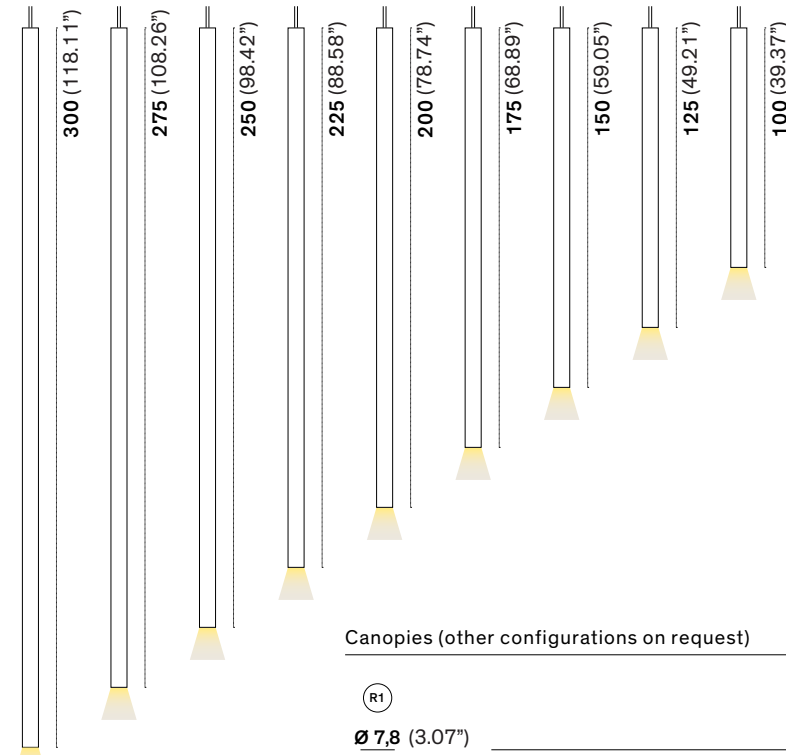

Canopies (other configurations on request)


R1

Ø 7,8 (3.07")



R5

78 / 156 / 234 (30.7" / 61.41" / 92.13")



5 (1.96")

SPECIFICATION SHEET

Ø 2,3 (0.9")
Furin L16H1

ORDERING INFO

Model (Order Code)	Finish	LED	Voltage	Dimming
		<input type="radio"/> 2700K	<input type="radio"/> 120V	<input type="radio"/> LTE (Leading/Trailing Edge Dim)
		<input type="radio"/> 3000K	<input type="radio"/> 277V	<input type="radio"/> 010V (0-10V)
		<input type="radio"/> 4000K		



Fixture comes with a 4" backplate that mounts to a standard junction box. Please note: 277V is only compatible with 0-10V dimming.

Luminart®

WWW.LUMINARTLIGHTING.COM