


# GELOS™

BOLLARD

TYPE:


PROJECT NAME:

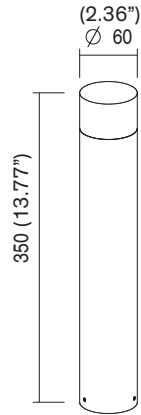

GELOS L350.60 M-S

9W


 kg 0,92 (2.02 lbs)

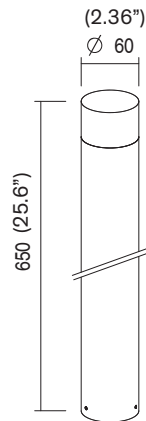

GELOS L650.60 M-M

9W

 kg 1,24 (2.73 lbs)

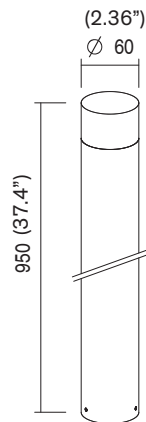

GELOS L950.60 M-L

9W

 kg 1,56 (3.43 lbs)

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND


WWW.LEDOLOGY.COM  
Last updated: 12/10/20

# GELOS™

BOLLARD

TYPE:


PROJECT NAME:

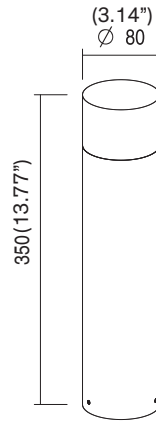

GELOS L350.80 L-S


10W


 kg 1,36 (2.99 lbs)

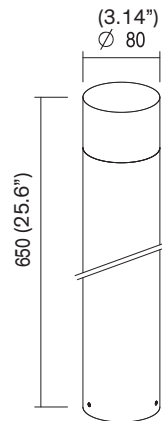

GELOS L650.80 L-M


10W

 kg 1,76 (3.88 lbs)

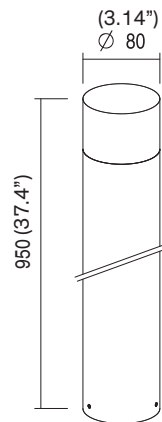

GELOS L950.80 L-L

10W

 kg 2,15 (4.73 lbs)

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM  
Last updated: 12/10/20

# GELOS™

BOLLARD

TYPE:

PROJECT NAME:

## ELECTRICAL FEATURES

WATTAGE M versions: **9W** - L versions: **10W**

VOLTAGE **120V, 277V**

DRIVER *Integrated*

DIMMING *0-10V, Leading/Trailing Edge*

CONNECTION *Mains voltage*

## LIGHTING FEATURES

COLOUR TEMPERATURE **2700K, 3000K, 4000K**

CRI **>90**

OPTICS **360°**

TOTAL NOMINAL LUMENS  
**M versions** 784lm (2700K) 838lm (3000K) 902lm (4000K)  
**L versions** 900lm (2700K) 950lm (3000K) 1000lm (4000K)

AVERAGE LED LIFE **50,000h L80 B10**

## MECHANICAL FEATURES

WEIGHT  
M-S version **0.92kg** L-S version **1.36kg**  
M-M version **1.24kg** L-M version **1.76kg**  
M-L version **1.56kg** L-L version **2.15kg**

FINISHES *White, Grey, Black, Corten, Anthracite*

MATERIAL *Anti-corrosion aluminum body and base, opal PMMA diffuser*

## GENERAL FEATURES

OPERATING TEMPERATURE **-10°C + 45°C**

INGRESS PROTECTION **IP65**

IMPACT RESISTANCE **IK08**

GLOW WIRE TEST **960°C.**

SCREEN TEMPERATURE **40° @ Ta = 25°**

WALKOVER */*

DRIVE OVER */*

POWER CABLES *Provided with 50 cm cable*

PHOTOBIOLOGICAL SAFETY **GR1**



SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM  
Last updated: 12/10/20