


**GRUE™**

FLOOR

**TYPE:**

**PROJECT NAME:**

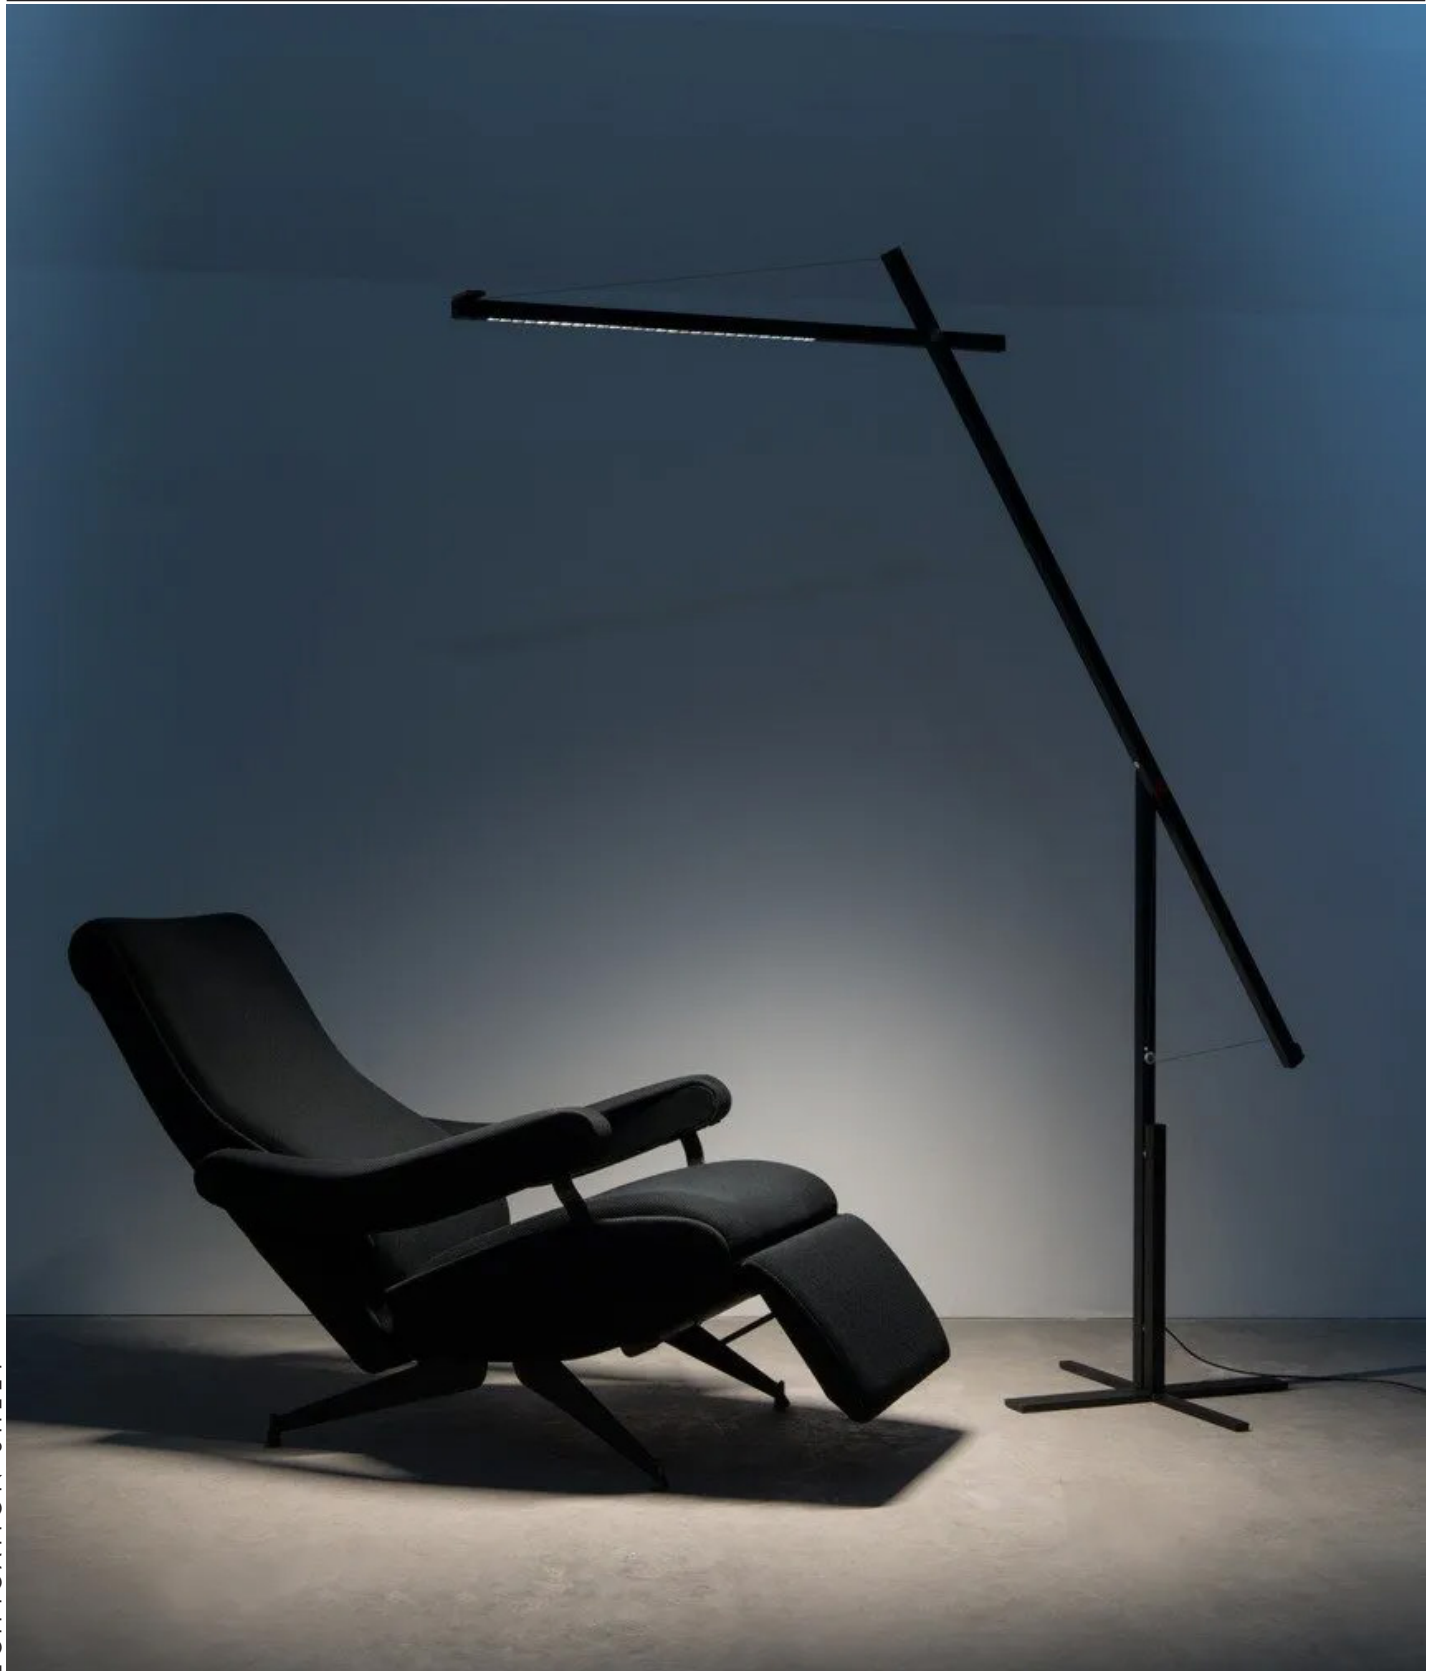

SPECIFICATION SHEET

**Luminart®**


[WWW.LUMINARTLIGHTING.COM](http://WWW.LUMINARTLIGHTING.COM)  
Last updated: 12/13/23

# GRUE™ 2000

FLOOR - OPAL DIFFUSER

TYPE:

PROJECT NAME:

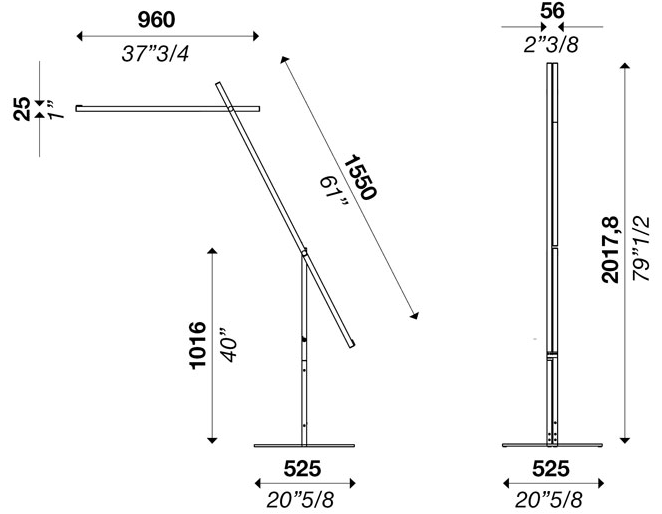

Floor lamp with direct light. Adjustable and fully foldable aluminium structure matt white, black or brass coated. Opal polycarbonate diffuser. Steel base matt white, black or brass coated. LED module.

**Power input:** 25W

**Light emission direction:** Direct

**Materials:** Aluminum structure, opal polycarbonate diffuser

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V

**Dimming:** Push dimming

**Structure finish:** Matt white, matt black, brass



**Light source:** LED  
3000K: 90CRI  
4000K: 90CRI

**Degree of protection:** IP20

**Source lumens:** 3375 lm

**Delivered lumens:** 2633 lm

**Source efficacy:** 135 lm/W

SPECIFICATION SHEET

## ORDERING INFO

Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L031230601A70100	<input type="radio"/> Matt White <input type="radio"/> Matt Black <input type="radio"/> Brass	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Push Dimming




# GRUE™ 2000

FLOOR - DARK LIGHT

TYPE:

PROJECT NAME:

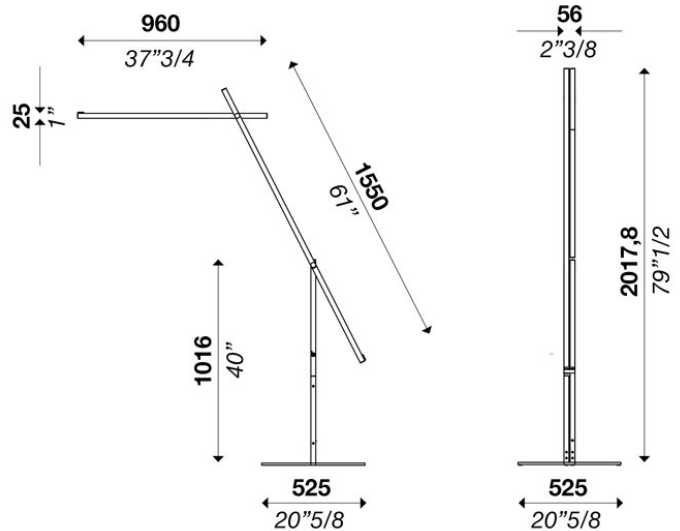

Floor lamp with direct light. Adjustable and fully foldable aluminium structure matt white, black or brass coated. Dark light optic diffuser. Steel base matt white, black or brass coated. LED module.

**Power input:** 25W

**Light emission direction:** Direct

**Materials:** Aluminum structure, dark light optic diffuser

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V

**Dimming:** Push dimming

**Structure finish:** Matt white, matt black, brass



**Light source:** LED  
3000K: 90CRI  
4000K: 90CRI

**Degree of protection:** IP20

**Source lumens:** 3375 lm

**Delivered lumens:** 3240 lm

**Source efficacy:** 135 lm/W

SPECIFICATION SHEET

## ORDERING INFO

Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L031230601A70140	<input type="radio"/> Matt White <input type="radio"/> Matt Black <input type="radio"/> Brass	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Push Dimming



**Luminart®**


WWW.LUMINARTLIGHTING.COM  
Last updated: 12/13/23

# GRUE™ 2500

FLOOR - OPAL DIFFUSER

TYPE:

PROJECT NAME:

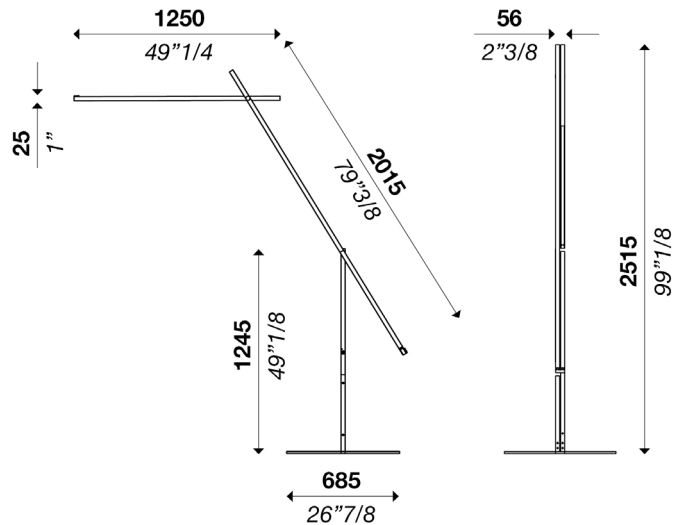

Floor lamp with direct light. Adjustable and fully foldable aluminium structure matt white, black or brass coated. Opal polycarbonate diffuser. Steel base matt white, black or brass coated. LED module.

**Power input:** 37W

**Light emission direction:** Direct

**Materials:** Aluminum structure, opal polycarbonate diffuser

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V

**Dimming:** Push dimming

**Structure finish:** Matt white, matt black, brass



**Light source:** LED  
3000K: 90CRI  
4000K: 90CRI

**Degree of protection:** IP20

**Source lumens:** 4995 lm

**Delivered lumens:** 3683 lm

**Source efficacy:** 135 lm/W

SPECIFICATION SHEET

## ORDERING INFO

Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L031230602A70100	<input type="radio"/> Matt White <input type="radio"/> Matt Black <input type="radio"/> Brass	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Push Dimming




# GRUE™ 2500

FLOOR - DARK LIGHT

TYPE:

PROJECT NAME:

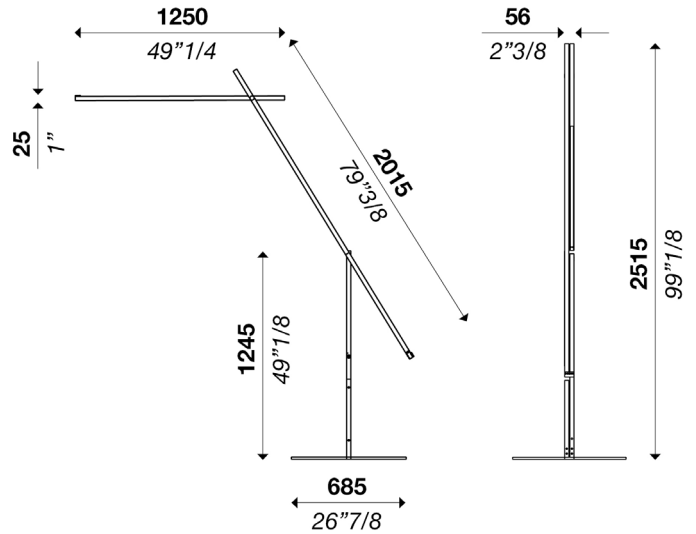

Floor lamp with direct light. Adjustable and fully foldable aluminium structure matt white, black or brass coated. Dark light optic diffuser. Steel base matt white, black or brass coated. LED module.

**Power input:** 37W

**Light emission direction:** Direct

**Materials:** Aluminum structure, dark light optic diffuser

**Electrical:** High efficiency electronic power supply, rated 50,000 hours 120V

**Dimming:** Push dimming

**Structure finish:** Matt white, matt black, brass



**Light source:** LED  
3000K: 90CRI  
4000K: 90CRI

**Degree of protection:** IP20

**Source lumens:** 4995 lm

**Delivered lumens:** 4752 lm

**Source efficacy:** 135 lm/W

SPECIFICATION SHEET

## ORDERING INFO

Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L031230602A70140	<input type="radio"/> Matt White <input type="radio"/> Matt Black <input type="radio"/> Brass	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Push Dimming



**Luminart®**

WWW.LUMINARTLIGHTING.COM  
Last updated: 12/13/23