

# HAMMER™

SUSPENSION

TYPE:

PROJECT NAME:

## Finish

Color:



White



Lead grey



Matte gold



Brick



Lime



Blue China

Metal structure



IP20

SPECIFICATION SHEET



Canopy detail

**Luminart®**

WWW.LUMINARTLIGHTING.COM

# HAMMER™

## SUSPENSION

### TYPE:

### PROJECT NAME:


<b>Single pendant lamp ø 15</b>	Ø 15 x 19 cm 1.5 Kg	lamp type 1xGU10 max watt 20W HES	L82HAMESO015G11
	Ø 15 x 19 cm 1.5 Kg	lamp type 1 led module 9W luminous efficacy 830 Lm light colour 2800 K cri >85	L82HAMESO015G01
<b>Single pendant lamp ø 18</b>	ø 18 x 22 cm 2 Kg	lamp type 1xGU10 max watt 20W HES	L82HAMESO018G11
	ø 18 x 22 cm 2 Kg	lamp type 1 led module 12W luminous efficacy 1110 Lm light colour 2800 K cri >85	L82HAMESO018G01
<b>Single pendant lamp ø 30</b>	ø 30 x 22 cm 2.5 Kg	lamp type 1 led module 24W luminous efficacy 2150 Lm light colour 2800 K cri >85	L82HAMESO030G01
<b>Composition with 2 diffusers ø 15</b>	3 Kg	lamp type 2xGU10 max watt 20W HES	L82HAMECS015G11
	3 Kg	lamp type 2 led module 9W luminous efficacy 2x 830 Lm light colour 2800 K cri >85	L82HAMECS015G01

### ORDERING INFO

Model (Order Code)	Finish	LED	Voltage	Dimming
		<input type="radio"/> 2700K	<input type="radio"/> 120V	<input type="radio"/> LTE (Leading/Trailing Edge Dim)
		<input type="radio"/> 3000K	<input type="radio"/> 277V	<input type="radio"/> 010V (0-10V)
		<input type="radio"/> 4000K		



Fixture comes with a 4" backplate that mounts to a standard junction box.  
Please note: 277V is only compatible with 0-10V dimming. Screw-in bulbs are only compatible with 120V with LTE dimming.

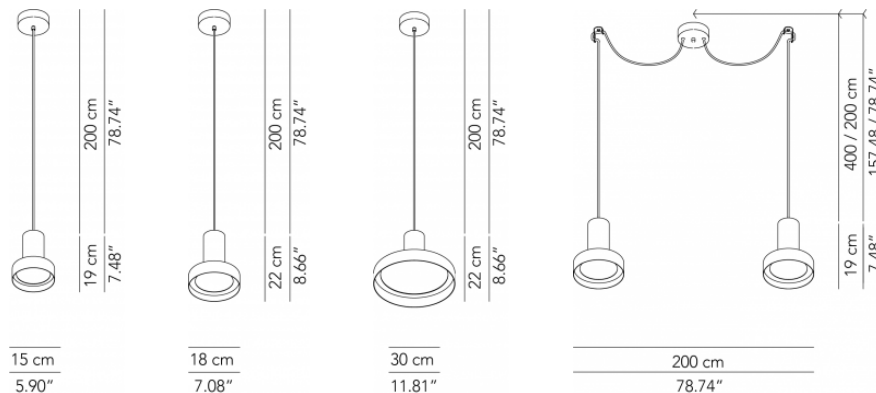

SPECIFICATION SHEET

**Luminart®**

WWW.LUMINARTLIGHTING.COM

# HAMMER™

## SUSPENSION

### TYPE:

### PROJECT NAME:

<b>Composition with 2 diffusers ø 18</b>	4 Kg	lamp type 2xGU10 max watt 20W HES	L82HAMECS018G11
	4 Kg	lamp type 2 led module 12W luminous efficacy 2220 Lm light colour 2800 K cri >85	L82HAMECS018G01
<b>Composition with 3 diffusers ø 15</b>	ø 41 4.5 Kg	lamp type 3xGU10 max watt 20W HES	L82HAMECM015G11
	ø 41 4.5 Kg	lamp type 3 led module 9W luminous efficacy 3x830 Lm light colour 2800 K cri >85	L82HAMECM015G01
<b>Composition with 3 diffusers ø 18</b>	ø 44 6 Kg	lamp type 3xGU10 max watt 20W HES	L82HAMECM018G11
	ø 44 6 Kg	lamp type 3 led module 12W luminous efficacy 3x1110 Lm light colour 2800 K cri >85	L82HAMECM018G01


### ORDERING INFO

Model (Order Code)	Finish	LED	Voltage	Dimming
		<input type="radio"/> 2700K	<input type="radio"/> 120V	<input type="radio"/> LTE (Leading/Trailing Edge Dim)
		<input type="radio"/> 3000K	<input type="radio"/> 277V	<input type="radio"/> 010V (0-10V)
		<input type="radio"/> 4000K		



Fixture comes with a 4" backplate that mounts to a standard junction box.

Please note: 277V is only compatible with 0-10V dimming. Screw-in bulbs are only compatible with 120V with LTE dimming.

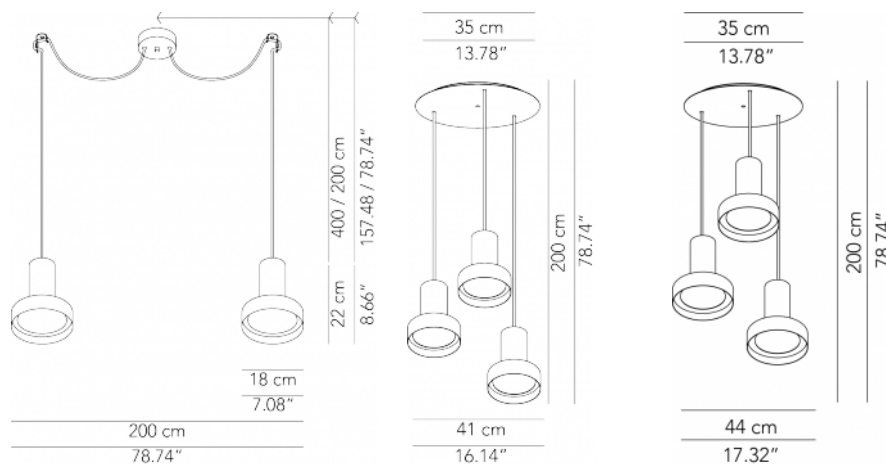

SPECIFICATION SHEET

**Luminart®**

WWW.LUMINARTLIGHTING.COM