

HOOP™ WALL

INSTALLATION INSTRUCTIONS FOR REMOTE DRIVER


TYPE:

PROJECT NAME:

Note: Installation should be carried out by a certified electrician.
Ensure main line power is turned off before attempting electrical connections.

1. Fasten bracket (A) to wall with solid support backing (wall stud or other wall support backing) using screws (B) OR toggle bolts (C) through wall surface.
2. Make electrical connections to remote driver. Use junction box cover plate if needed.
3. Mount fixture to brackets by fastening set screws (D) through holes in fixture

Two mounting options:

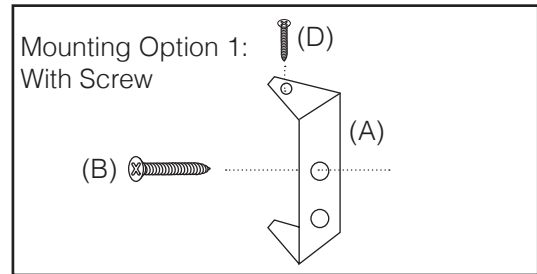

Mounting Option 2:
With Toggle Bolt

