

Fig. 1


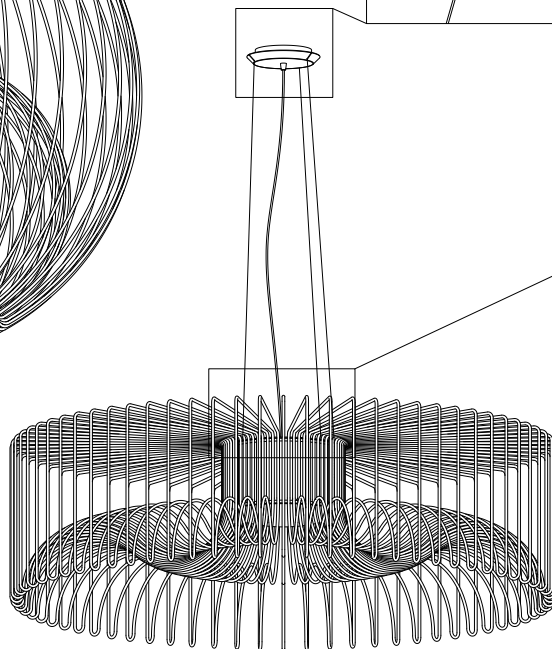


Fig. 2

INSTRUCTION

- Switch off the power or pull the plug out.
- Fix the bracket (A) with the screws (B) and the shims (C) to the ceiling.
- Connect the network cables at the clamps (D) and (D1) according to the marking and close again the box (E).
- Close the ceiling rose (F) by screwing the screws (G) and the washer (H) to the bracket (A).
- To regulate the position of the lamp screw the pin (N) pushing the cable lock (O), regulate the length of the cable, then close again the pin (N) and cut the cable in excess. Replace the securing device (L) by screwing and tighten again the grub (Fig.2).
- Screw the light bulbs in the lamp sockets.

ATTENTION

The products of our production are suitable for the using in usual surroundings with standard temperature and humidity levels. All the operations have to be done by a technician.

CLEANING

Switch off the power or pull the plug out.

For the periodical cleaning of the lamp use always gloves and a soft cloth or a feather duster. Don't use aggressive solvents or alcohol.

It's possible to remove completely the lampshades by unscrewing with a screwdriver the two screws (N) that join the lampshade to the structure.

For the central lampshade unscrew the ring nut (O) from the lamp socket (P).