

IDEA™

CEILING/WALL

TYPE:

PROJECT NAME:

Finish

Frame color:



White



Graphite


Fabric diffusers:



Lycra

Metal structure,
removable lycra
fabric disks


Direct light

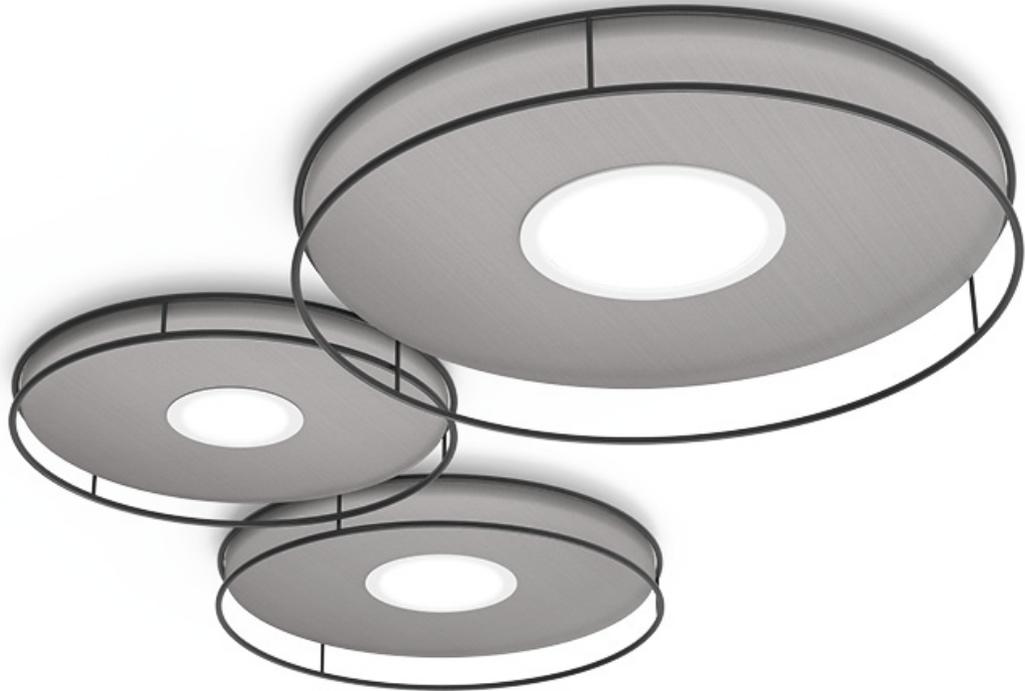

IP20



Anti-Glare
accessory detail



Wall lamp version

SPECIFICATION SHEET



Lycra



Cod. 250
White



Cod. 263
Sand



Cod. 264
Yellow



Cod. 252
Grey



Cod. 262
Gunmetal grey

IDEA™

CEILING/WALL

TYPE:

PROJECT NAME:

| | | | |
|--------------------------------|------------------------|-------------------------------------------------------------------------------------------------------|-----------------|
| Wall/ceiling lamp Ø 66 | Ø 66 x 13 cm 10 Kg | lamp type 1 led module 18W luminous efficacy 1660 Lm light colour 2800K 0-10V DIM cri >80 | L82IDEEPL060L01 |
| Wall/ceiling lamp Ø 80 | Ø 80 x 13 cm 15 Kg | lamp type 1 led module 24W luminous efficacy 2150 Lm light colour 2800K 0-10V DIM cri >85 | L82IDEEPL080L01 |
| Wall/ceiling lamp Ø 100 | Ø 100 x 13 cm 18 Kg | lamp type 1 led module 24W luminous efficacy 2150 Lm light colour 2800K 0-10V DIM cri >85 | L82IDEEPL100L01 |
| Wall/ceiling lamp Ø 140 | Ø 140 x 10 cm 25 Kg | lamp type 1 led module 30W luminous efficacy 2400 Lm light colour 2800K 0-10V DIM cri >80 | L82IDEEPL140L01 |

ORDERING INFO

| | | | | |
|--------------------|--------|-------------------------------------------------------------------------------------------|----------------------------|---------------------------------------------------------------------------------------------|
| Model (Order Code) | Finish | LED | Voltage | Dimming |
| | | <input type="radio"/> 2800K <input type="radio"/> 3000K <input type="radio"/> 4000K | <input type="radio"/> 120V | <input type="radio"/> LTE (Leading/Trailing Edge Dim) <input type="radio"/> 010V (0-10V) |

 Fixture comes with a 4" backplate that mounts to a standard junction box.

SPECIFICATION SHEET

