


IVY™ TRANSPARENT

RECESSED

TYPE:

PROJECT NAME:

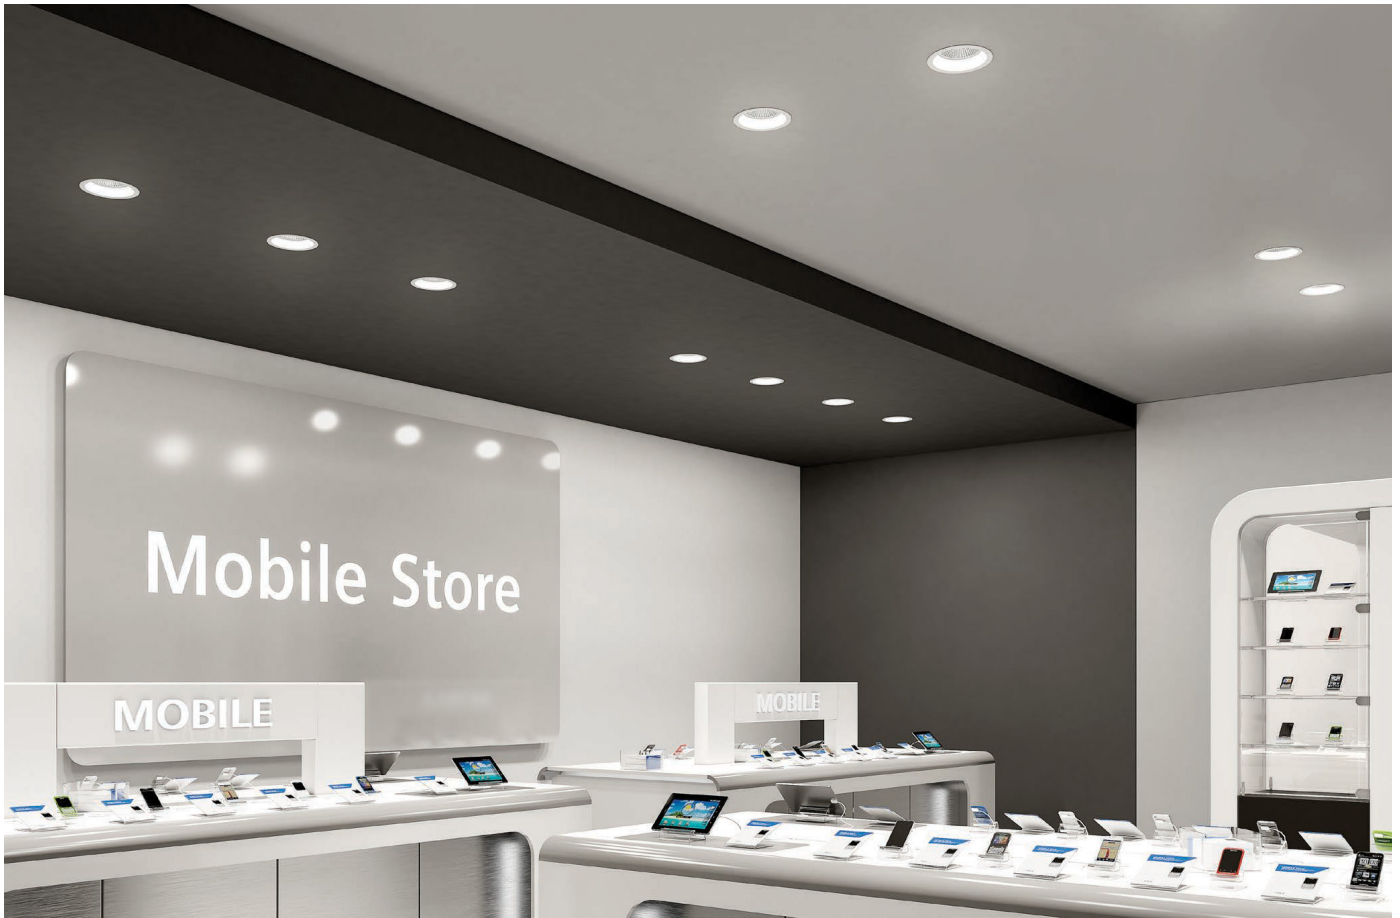

IVY

SPECIFICATION SHEET

Ivy recessed luminaire equipped with a high efficiency LED light source. It is made from epoxy powder coated finish die-cast aluminum stabilized with UV rays and provided with transparent or satinized screen and aluminum reflector. Driver included. Dimmable version available on request. The degree of protection against the penetration of dust, solid objects and liquids is IP43.

Luminart®



WWW.LUMINARTLIGHTING.COM
Last updated: 09/16/24

IVY™ TRANSPARENT 145


RECESSED

TYPE:

PROJECT NAME:

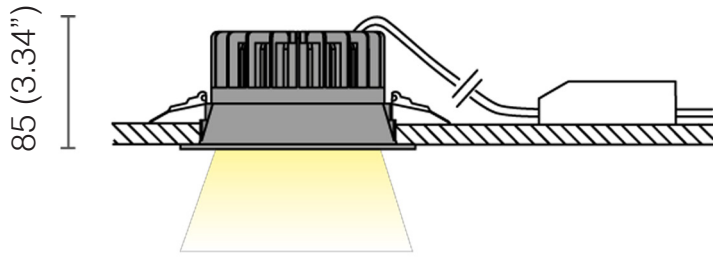

Ø145 (5.7")



Finish

Matt Black

Frosted White



CODE	W	Lm (3000K)	Lifetime
L255646.13	13	1775	60.000h L80/B10
L255646.18	18	2450	60.000h L80/B10



70°



3



3000K / 4000K



A+



43



0



>80

ORDERING INFO

Model (Order Code)	Finish Options	Optic Option	LED	Remote Driver
<input type="radio"/> L255646.13 13W <input type="radio"/> L255646.18 18W	<input type="radio"/> 02: Matt Black <input type="radio"/> 08: Frosted White	<input type="radio"/> 70: 70°	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120-277V 0-10V

SPECIFICATION SHEET





IVY™ TRANSPARENT 190

RECESSED

TYPE:

PROJECT NAME:

105 (4.13")

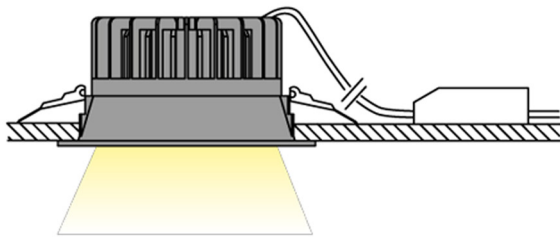



Ø190 (7.48")

Ø170 (6.69")

Finish

Matt Black

Frosted White

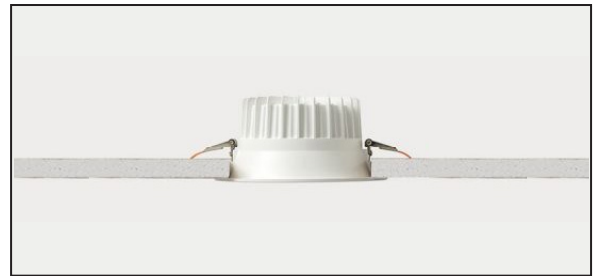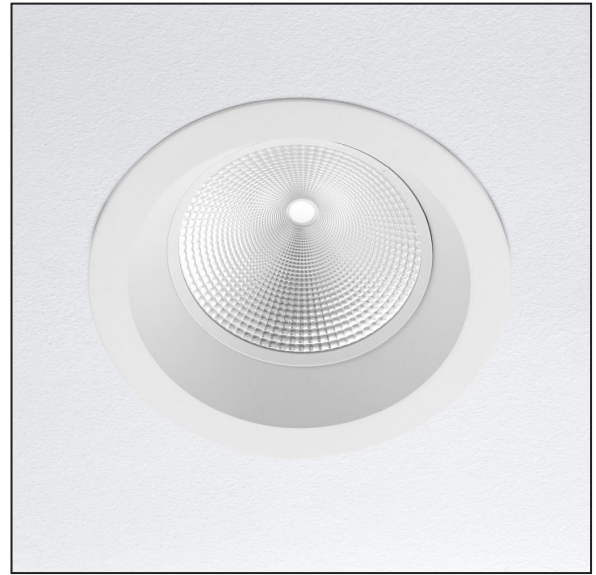

CODE	W	Lm (3000K)	Lifetime
L255648.18	18	2615	60.000h L80/B10
L255648.25	25	3530	60.000h L80/B10
L255648.33	33	4500	60.000h L80/B10



90°



3



3000K / 4000K



A+



43



0



>80

ORDERING INFO

Model (Order Code)	Finish Options	Optic Option	LED	Remote Driver
<input type="radio"/> L255648.18 18W <input type="radio"/> L255648.25 25W <input type="radio"/> L255648.33 33W	<input type="radio"/> 02: Matt Black <input type="radio"/> 08: Frosted White	<input type="radio"/> 90: 100°	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120-277V 0-10V

SPECIFICATION SHEET





IVY™ TRANSPARENT 230

RECESSED

TYPE:

PROJECT NAME:

115 (4.52")

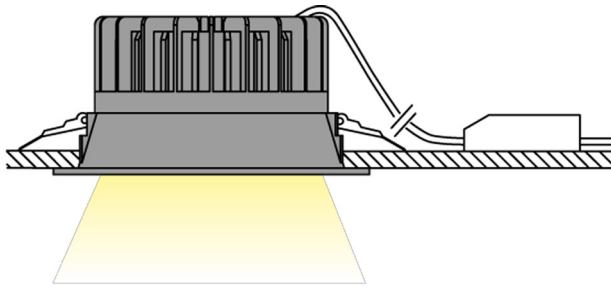



Ø230 (9.05")

Ø195 (7.67")

Finish

Matt Black

Frosted White

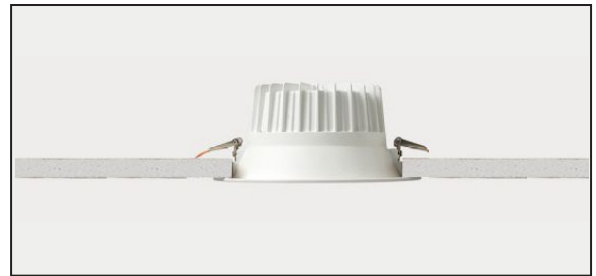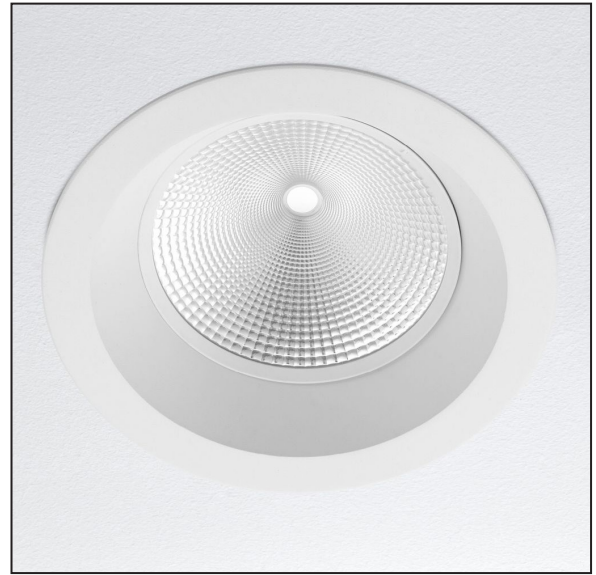

CODE	W	Lm (3000K)	Lifetime
L255650.18	18	2615	60.000h L80/B10
L255650.25	25	3530	60.000h L80/B10
L255650.33	33	4500	60.000h L80/B10
L255650.37	37	5165	60.000h L80/B10



90°



3000K / 4000K



43



>80



SDCM 3



EEI A+



RG 0

ORDERING INFO

Model (Order Code)	Finish Options	Optic Option	LED	Remote Driver
○ L255650.18 18W	○ 02: Matt Black	○ 90: 90°	○ 30: 3000K	○ 120V LTE
○ L255650.25 25W	○ 08: Frosted White		○ 40: 4000K	○ 120-277V 0-10V
○ L255650.33 33W				
○ L255650.37 33W				

SPECIFICATION SHEET

