

# K<sup>3</sup> MINI LED

Wall effect

- Aluminium



One window

LED



Two windows

LED



Four windows

LED



# K<sup>3</sup> MINILED


Wall effect

## GENERAL FEATURES

- Small size, cubic form outdoor fitting.
- **Structure:** polycarbonate UV resistant diffuser. Low copper content die-cast aluminium or AISI 316L stainless steel body. Matching stainless steel Allen screws.
- Light emissions with net light demarcation.
- Can be installed on wall/ceiling and in the ground in the garden using a special spike.
- Cable entry from the back.
- The LED source is directed 10° toward the wall to accentuate the wall-washer effect.
- New generation LED sources with minimum life 50,000 h with subsequent deterioration max 30%. Driver inside.
- **Finish:** for aluminium, pickling + phosphochrome + epoxy basic coating + UV resistant stabilised epoxy powder coating. For stainless steel: brushed and polished.
- Manufactured in compliance with European standards EN 60598-1:2015 **CE**

## MATERIALS AND COLOURS

The lighting fittings are available in primary aluminum, finished in aluminum grey (1), matt white (2) and anthracite (3)




## LIGHTING EFFICIENCY

High efficiency power leds: 1/2/4 units with 3W and 185 lumen each. Special pure lens govern and direct the light and its angle beam. 220-250V 50-60Hz driver inside.



## EASY DISASSEMBLY


Assembling and maintenance are simple even if the fixture is already installed. The polycarbonate diffusers at frame level avoid stagnant water on the up surface.



| ANGLE BEAM COMBINATIONS




30° one window

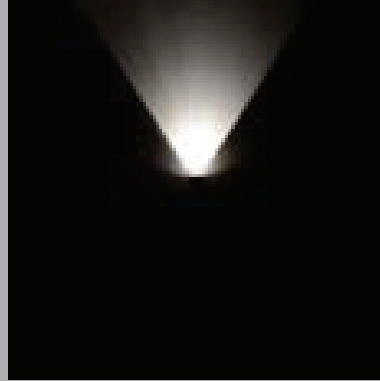


70° one window


K3 Miniled range consists of 3 fixtures  
- cube with one window  
- cube with two opposite windows  
- cube with 4 windows  
Two angle beam available  
- narrow 30°  
- wide 70°

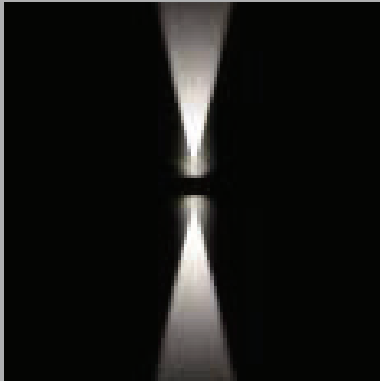


30° two windows

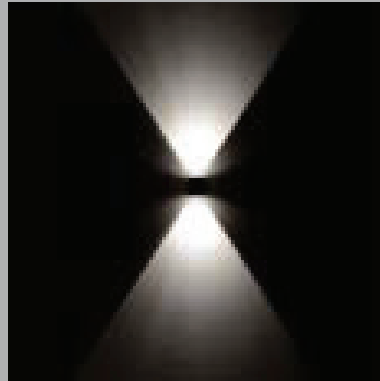


70° two windows

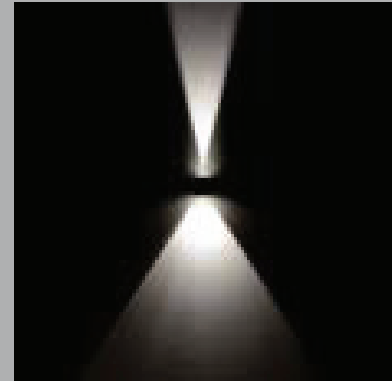

30°+70° two windows

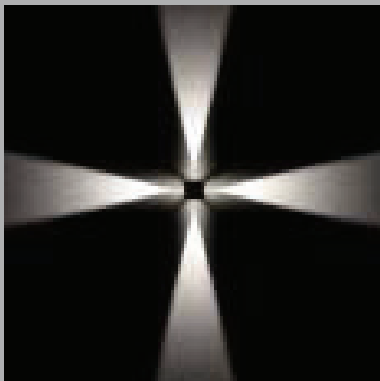

30° four windows

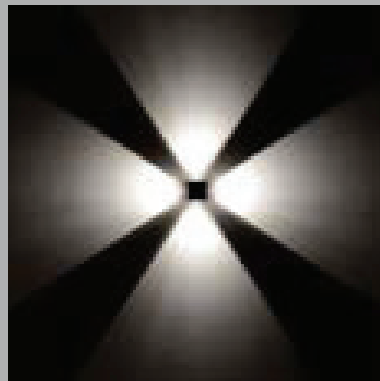

70° four windows

# K<sup>3</sup> MINILED


Wall effect




TYPE: \_\_\_\_\_

## | K<sup>3</sup> MINILED ALUMINIUM

PROJECT NAME: \_\_\_\_\_

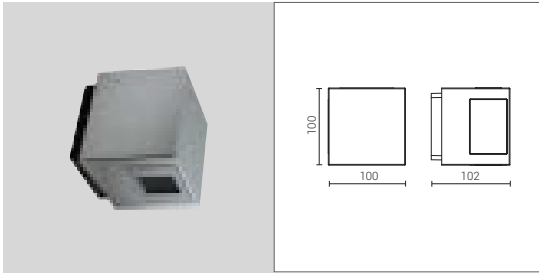


| 1 window




| CODE  | LAMP      | W | -Real output |     | AN | AG | BI |
|-------|-----------|---|--------------|-----|----|----|----|
| 1040* | ☉ Led 30° | 3 | 185          | 20  |    |    |    |
| 1041* | ☉ Led 70° | 3 | 185          | 124 |    |    |    |


Corten colour available upon request.  
 IP 65 / Class II / IK 08  
 CRI 85 / Driver IN / 700 mA  
 120V/60Hz  
 CE  
**Standard 4000K.** Other tonality on request. Add TC to the code if 3000K.

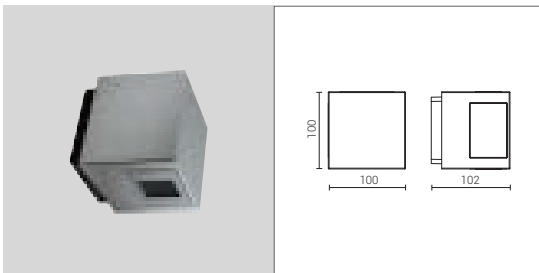


| 2 windows

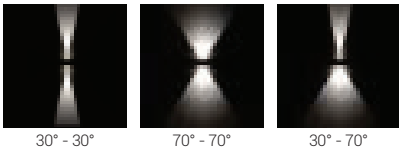

| CODE  | LAMP          | W   | -Real output |     | AN | AG | BI |
|-------|---------------|-----|--------------|-----|----|----|----|
| 1042* | ☉ Led 30°+30° | 2x3 | 370          | 36  |    |    |    |
| 1043* | ☉ Led 70°+70° | 2x3 | 370          | 241 |    |    |    |
| 1044* | ☉ Led 30°+70° | 2x3 | 370          | 135 |    |    |    |

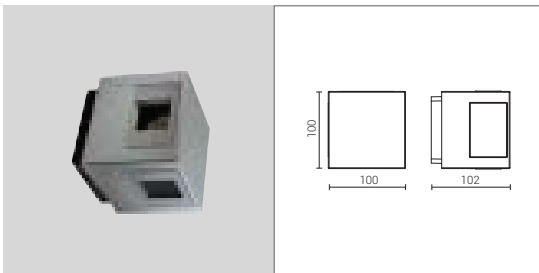

| 4 windows



| CODE  | LAMP      | W   | -Real output |     | AN | AG | BI |
|-------|-----------|-----|--------------|-----|----|----|----|
| 1045* | ☉ Led 30° | 4x3 | 740          | 54  |    |    |    |
| 1046* | ☉ Led 70° | 4x3 | 740          | 337 |    |    |    |


SPECIFICATION SHEET

# K<sup>3</sup> MINILED

TYPE: \_\_\_\_\_

| SPIKE

PROJECT NAME: \_\_\_\_\_

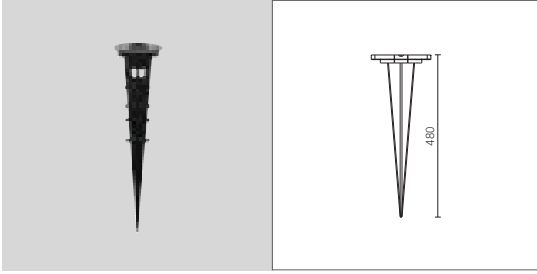

CODE / DESCRIPTION

1090 / Spike

*Technopolymer body.*



SPECIFICATION SHEET