
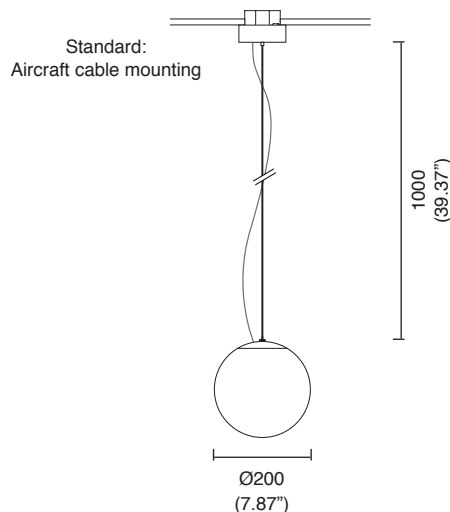


KALISPERA MINI

SUSPENSION

TYPE:

PROJECT NAME:

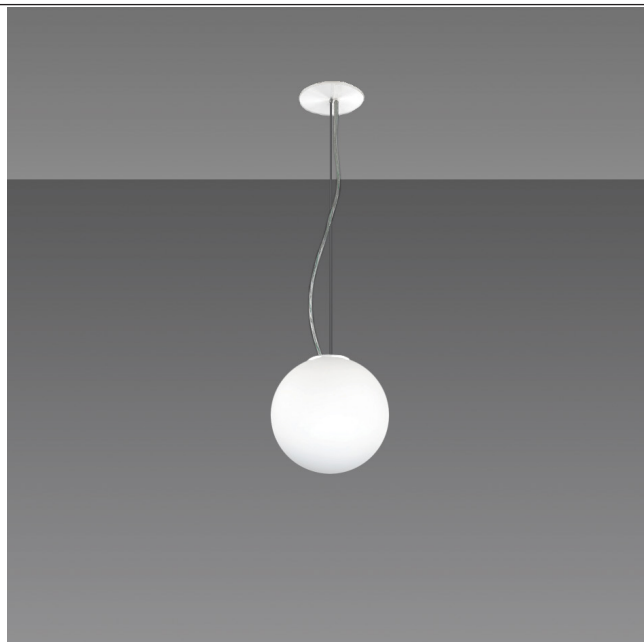

Spherical pendant light with shade diameter Ø200 mm (7.87"). Product consists of wire pendant and PMMA matt shade. Shade is fixed by steel hanger. Suitable for indoor use.

Power input: 9W

Hanger: wire, steel wire and transparent power cord

Mounting: Pendant

Material base: Metal



Shade: matt opal polymethylmethacrylate - PMMA

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, Black, Polished metal, Brushed metal

Shade holder: steel holder



Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours

Input [W]	Lum. flux of light source [lm]		Lum. flux of luminaire [lm]	
	3000K	4000K	3000K	4000K
9	1070	1130	950	1000

ORDERING INFO

Model (Order Code)	Source	Hanger	Structure Finish	LED	Driver Options
○ L74ISL1PMM	○ 9W	○ Standard: Air craft cable mounting ○ On request: Single power cable mounting	○ White ○ Black ○ Polished metal ○ Brushed metal	○ 3000K ○ 4000K	○ 120V Phase Dimming ○ 120V 0-10V Dimming ○ 277V 0-10V Dimming



SPECIFICATION SHEET

Luminart®



WWW.LUMINARTLIGHTING.COM
Last updated: 09/14/23

KALISPERA SMALL

SUSPENSION

TYPE:

PROJECT NAME:

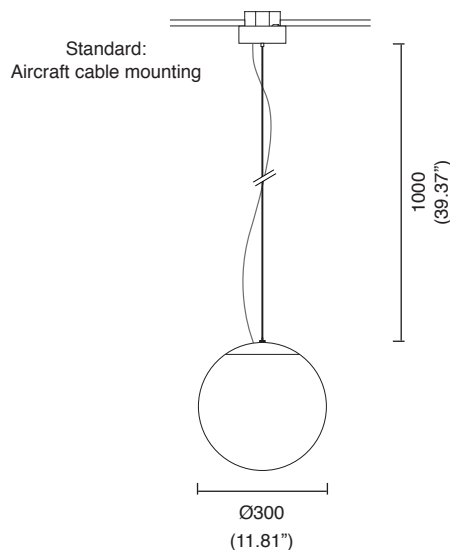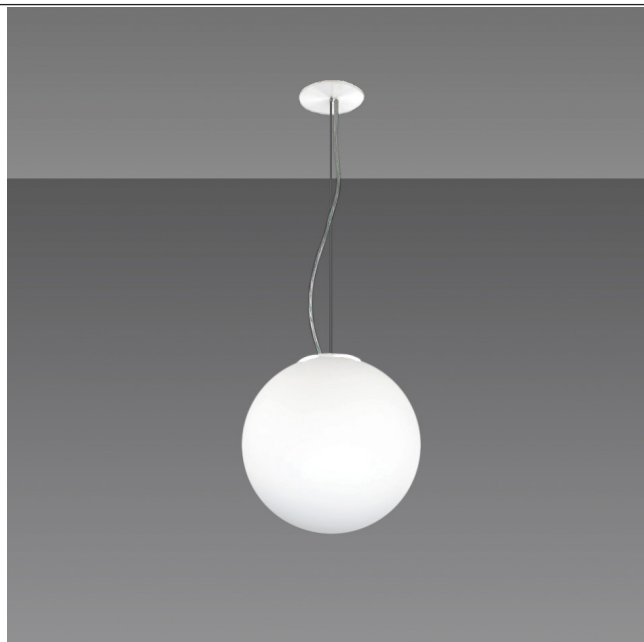

Spherical pendant light with shade diameter Ø300 mm (11.81"). Product consists of wire pendant and PMMA matt shade. Shade is fixed by steel hanger. Suitable for indoor use.

Power input: 20W

Hanger: wire, steel wire and transparent power cord

Mounting: Pendant

Material base: Metal



Shade: matt opal polymethylmethacrylate - PMMA

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, Black, Polished metal, Brushed metal

Shade holder: steel holder with Ø110mm (4.33") opening



Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours

Input [W]	Lum. flux of light source [lm]		Lum. flux of luminaire [lm]	
	3000K	4000K	3000K	4000K
20	2970	3130	2610	2760

ORDERING INFO

Model (Order Code)	Source	Hanger	Structure Finish	LED	Driver Options
○ L74ISISL2PMM	○ 20W	○ Standard: Air craft cable mounting ○ On request: Single power cable mounting	○ White ○ Black ○ Polished metal ○ Brushed metal	○ 3000K ○ 4000K	○ 120V Phase Dimming ○ 120V 0-10V Dimming ○ 277V 0-10V Dimming



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 09/14/23

KALISPERA MEDIUM

SUSPENSION

TYPE:

PROJECT NAME:

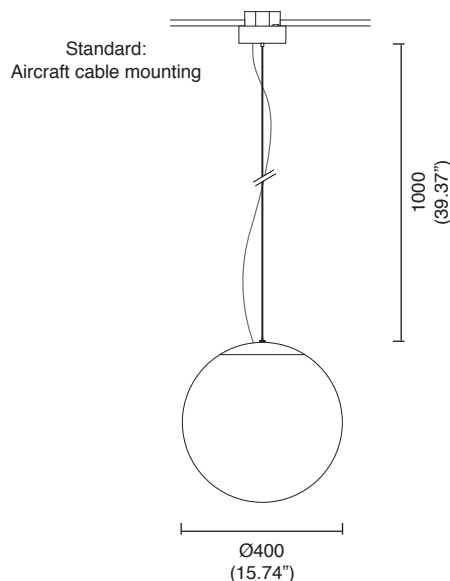

Spherical pendant light with shade diameter Ø400 mm (15.74"). Product consists of wire pendant and PMMA matt shade. Shade is fixed by steel hanger. Suitable for indoor use.

Power input: 27W

Hanger: wire, steel wire and transparent power cord

Mounting: Pendant

Material base: Metal



Shade: matt opal polymethylmethacrylate - PMMA

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, Black, Polished metal, Brushed metal

Shade holder: steel holder with Ø150mm (5.9") opening



Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours

Input [W]	Lum. flux of light source [lm]		Lum. flux of luminaire [lm]	
	3000K	4000K	3000K	4000K
27	3900	4110	3430	3620

ORDERING INFO

Model (Order Code)	Source	Hanger	Structure Finish	LED	Driver Options
○ L74ISL3PMM	○ 27W	○ Standard: Air craft cable mounting ○ On request: Single power cable mounting	○ White ○ Black ○ Polished metal ○ Brushed metal	○ 3000K ○ 4000K	○ 120V Phase Dimming ○ 120V 0-10V Dimming ○ 277V 0-10V Dimming



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 09/14/23

KALISPERA LARGE

SUSPENSION

TYPE:

PROJECT NAME:

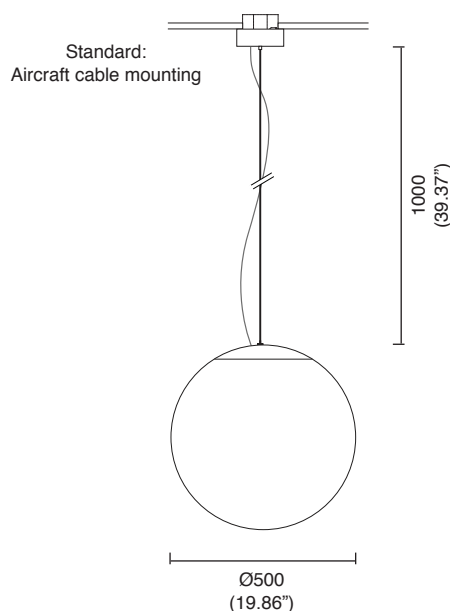

Spherical pendant light with shade diameter Ø500 mm (19.86"). Product consists of wire pendant and PMMA matt shade. Shade is fixed by steel hanger. Suitable for indoor use.

Power input: 41W

Hanger: wire, steel wire and transparent power cord

Mounting: Pendant

Material base: Metal



Shade: matt opal polymethylmethacrylate - PMMA

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, Black, Polished metal, Brushed metal

Shade holder: steel holder with Ø150mm (5.9") opening



Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours

Input [W]	Lum. flux of light source [lm]		Lum. flux of luminaire [lm]	
	3000K	4000K	3000K	4000K
41	5880	6200	5170	5450

ORDERING INFO

Model (Order Code)	Source	Hanger	Structure Finish	LED	Driver Options
○ L74ISISL4PMM	○ 41W	○ Standard: Air craft cable mounting ○ On request: Single power cable mounting	○ White ○ Black ○ Polished metal ○ Brushed metal	○ 3000K ○ 4000K	○ 120V Phase Dimming ○ 120V 0-10V Dimming ○ 277V 0-10V Dimming



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 09/14/23

KALISPERA XL

SUSPENSION

TYPE:

PROJECT NAME:

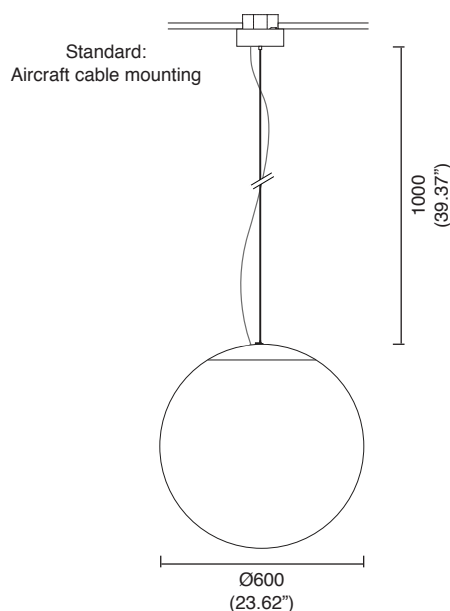

Spherical pendant light with shade diameter Ø600mm (23.62")
Product consists of wire pendant and PMMA matt shade. Shade is fixed by steel hanger. Suitable for indoor use.

Power input: 41W

Hanger: wire, steel wire and transparent power cord

Mounting: Pendant

Material base: Metal



Shade: matt opal polymethylmethacrylate - PMMA

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, Black, Polished metal, Brushed metal

Shade holder: steel holder with Ø150mm (5.9") opening



Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours

Input [W]	Lum. flux of light source [lm]		Lum. flux of luminaire [lm]	
	3000K	4000K	3000K	4000K
41	5880	6200	5170	5450

ORDERING INFO

Model (Order Code)	Source	Hanger	Structure Finish	LED	Driver Options
<input type="radio"/> L74ISL5PMM	<input type="radio"/> 41W	<input type="radio"/> Standard: Air craft cable mounting <input type="radio"/> On request: Single power cable mounting	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Polished metal <input type="radio"/> Brushed metal	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming <input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 09/14/23