
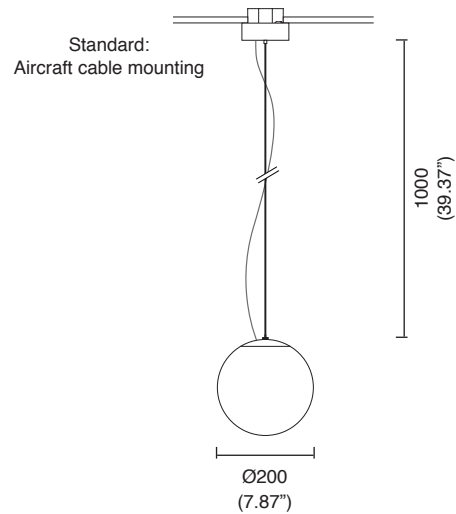


KALISPERA™ MINI

SUSPENSION

TYPE:

PROJECT NAME:

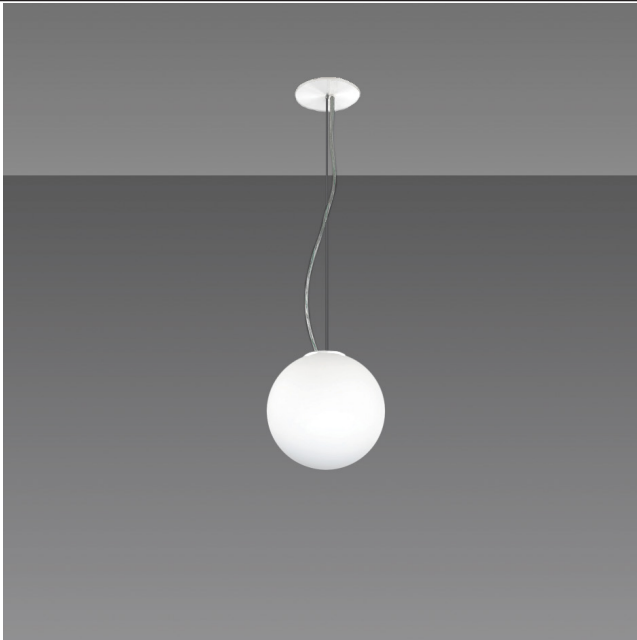

Spherical pendant light with shade diameter Ø200 mm (7.87"). Product consists of wire pendant and PMMA matt shade. Shade is fixed by steel hanger. Suitable for indoor use.

Power input: 9W

Hanger: wire, steel wire and transparent power cord

Mounting: Pendant

Material base: Metal



Shade: matt opal polymethylmethacrylate - PMMA

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, Black, Polished metal, Brushed metal

Shade holder: steel holder



Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours

| Input [W] | Lum. flux of light source [lm] | | Lum. flux of luminaire [lm] | |
|-----------|--------------------------------|-------|-----------------------------|-------|
| | 3000K | 4000K | 3000K | 4000K |
| 9 | 1070 | 1130 | 950 | 1000 |

ORDERING INFO

| Model (Order Code) | Source | Hanger | Structure Finish | LED | Driver Options |
|--------------------|--------|---|---|--------------------|--|
| ○ L74ISL1PMM | ○ 9W | ○ Standard: Air craft cable mounting ○ On request: Single power cable mounting | ○ White ○ Black ○ Polished metal ○ Brushed metal | ○ 3000K ○ 4000K | ○ 120V Phase Dimming ○ 120V 0-10V Dimming ○ 277V 0-10V Dimming |



SPECIFICATION SHEET

Luminart®



WWW.LUMINARTLIGHTING.COM
Last updated: 09/14/23

KALISPERA™ SMALL

SUSPENSION

TYPE:

PROJECT NAME:

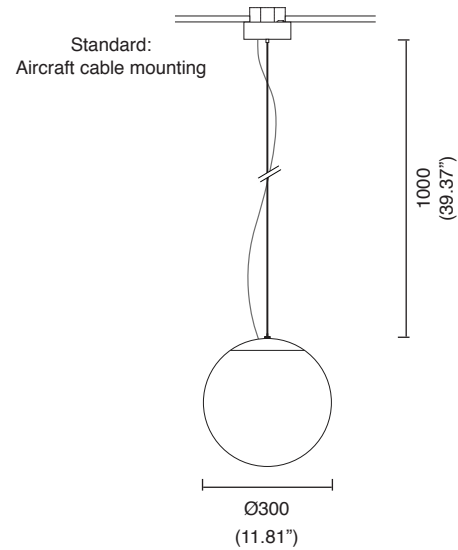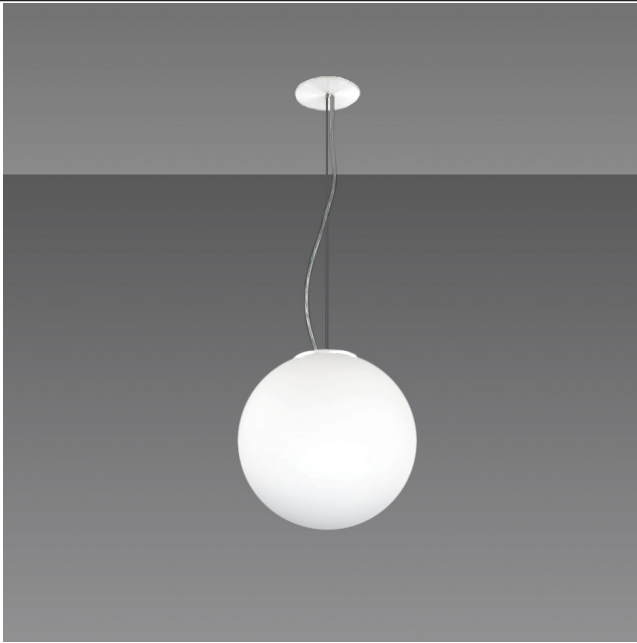

Spherical pendant light with shade diameter Ø300 mm (11.81"). Product consists of wire pendant and PMMA matt shade. Shade is fixed by steel hanger. Suitable for indoor use.

Power input: 20W

Hanger: wire, steel wire and transparent power cord

Mounting: Pendant

Material base: Metal



Shade: matt opal polymethylmethacrylate - PMMA

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, Black, Polished metal, Brushed metal

Shade holder: steel holder with Ø110mm (4.33") opening



Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours

| Input [W] | Lum. flux of light source [lm] | | Lum. flux of luminaire [lm] | |
|-----------|--------------------------------|-------|-----------------------------|-------|
| | 3000K | 4000K | 3000K | 4000K |
| 20 | 2970 | 3130 | 2610 | 2760 |

ORDERING INFO

| Model (Order Code) | Source | Hanger | Structure Finish | LED | Driver Options |
|--------------------|--------|---|---|--------------------|--|
| ○ L74ISISL2PMM | ○ 20W | ○ Standard: Air craft cable mounting ○ On request: Single power cable mounting | ○ White ○ Black ○ Polished metal ○ Brushed metal | ○ 3000K ○ 4000K | ○ 120V Phase Dimming ○ 120V 0-10V Dimming ○ 277V 0-10V Dimming |



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 09/14/23

KALISPERA™ MEDIUM

SUSPENSION

TYPE:

PROJECT NAME:

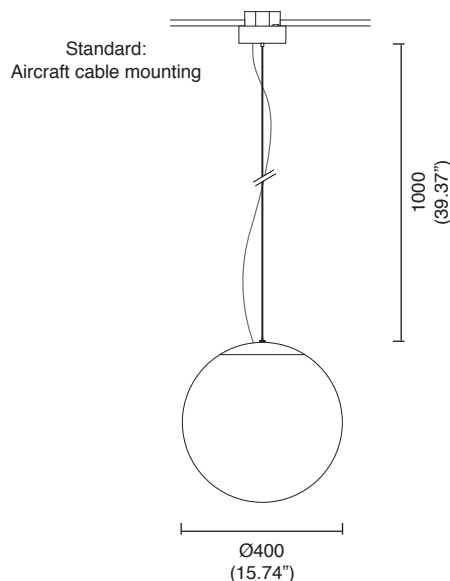

Spherical pendant light with shade diameter Ø400 mm (15.74"). Product consists of wire pendant and PMMA matt shade. Shade is fixed by steel hanger. Suitable for indoor use.

Power input: 27W

Hanger: wire, steel wire and transparent power cord

Mounting: Pendant

Material base: Metal



Shade: matt opal polymethylmethacrylate - PMMA

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, Black, Polished metal, Brushed metal

Shade holder: steel holder with Ø150mm (5.9") opening



Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours

| Input [W] | Lum. flux of light source [lm] | | Lum. flux of luminaire [lm] | |
|-----------|--------------------------------|-------|-----------------------------|-------|
| | 3000K | 4000K | 3000K | 4000K |
| 27 | 3900 | 4110 | 3430 | 3620 |

ORDERING INFO

| Model (Order Code) | Source | Hanger | Structure Finish | LED | Driver Options |
|--------------------|--------|---|---|--------------------|--|
| ○ L74ISISL3PMM | ○ 27W | ○ Standard: Air craft cable mounting ○ On request: Single power cable mounting | ○ White ○ Black ○ Polished metal ○ Brushed metal | ○ 3000K ○ 4000K | ○ 120V Phase Dimming ○ 120V 0-10V Dimming ○ 277V 0-10V Dimming |



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 09/14/23

KALISPERA™ LARGE

SUSPENSION

TYPE:

PROJECT NAME:

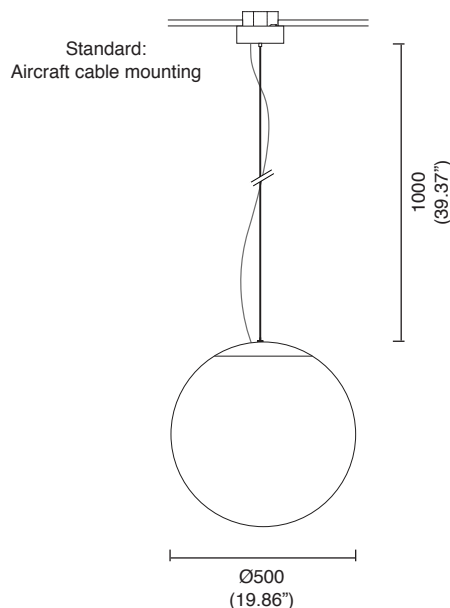

Spherical pendant light with shade diameter Ø500 mm (19.86"). Product consists of wire pendant and PMMA matt shade. Shade is fixed by steel hanger. Suitable for indoor use.

Power input: 41W

Hanger: wire, steel wire and transparent power cord

Mounting: Pendant

Material base: Metal



Shade: matt opal polymethylmethacrylate - PMMA

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White, Black, Polished metal, Brushed metal

Shade holder: steel holder with Ø150mm (5.9") opening



Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours

| Input [W] | Lum. flux of light source [lm] | | Lum. flux of luminaire [lm] | |
|-----------|--------------------------------|-------|-----------------------------|-------|
| | 3000K | 4000K | 3000K | 4000K |
| 41 | 5880 | 6200 | 5170 | 5450 |

ORDERING INFO

| Model (Order Code) | Source | Hanger | Structure Finish | LED | Driver Options |
|--------------------|--------|---|---|--------------------|--|
| ○ L74ISISL4PMM | ○ 41W | ○ Standard: Air craft cable mounting ○ On request: Single power cable mounting | ○ White ○ Black ○ Polished metal ○ Brushed metal | ○ 3000K ○ 4000K | ○ 120V Phase Dimming ○ 120V 0-10V Dimming ○ 277V 0-10V Dimming |



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 09/14/23