LEO™
CEILING

Supplied with 4" round backplate (not pictured)

LEO SMALL

45°	
TC	2700K / 3000K / 4000K
IP	40
CRI	93
SDCM	3
EEI	A+
RG	1

06	Black
08	White
13	Gold
34	Steel
A	Trim rings
	L25AN034.06 Black ring
	L25AN034.08 White ring
	L25AN034.13 Gold ring
	L25AN034.34 Steel ring

Ø50 (Ø1.96") / Ø55 (Ø2.16") / min. 50 (1.96") / 45 (1.77") / 40 (1.57") / 65 (2.55") / Ø40 (Ø1.57") / 350° / 90°
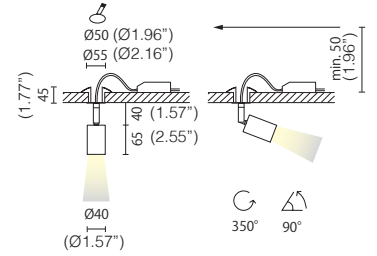
CODE	W	Lm (3000K)	Lifetime
L25A5-698...	10	1110	75.000h L80/B10

Supplied with 4" round backplate (not pictured)

LEO MEDIUM

40°	*(20° and 55° on request)*
TC	2700K / 3000K / 4000K
IP	40
CRI	93
SDCM	3
EEI	A+
RG	1

06	Black
08	White
33	Rose gold
34	Steel
A	Trim rings
	L25AN035.06 Black ring
	L25AN035.08 White ring
	L25AN035.33 Rose gold ring
	L25AN035.34 Steel ring

Ø50 (Ø1.96") / Ø55 (Ø2.16") / min. 50 (1.96") / 45 (1.77") / 120 (4.72") / 145 (5.7") / Ø54 (Ø2.12") / 350° / 90°
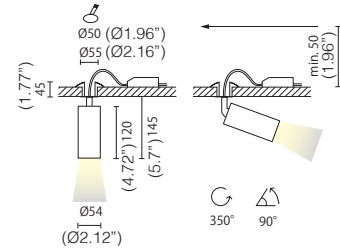
CODE	W	Lm (3000K)	Lifetime
L25A5-691...	12	1520	75.000h L80/B10

The rose gold and the frosted steel product is always supplied with a black bracket.

ORDERING INFO

Model (Order Code)	Finish	LED	Remote Driver Options
	○ 06 Black	○ 2700K	○ 120V Phase Dimming
	○ 08 White	○ 3000K	○ 120V 0-10V Dimming
	○ 13 Gold	○ 4000K	○ 277V 0-10V Dimming
	○ 34 Steel		

Fixture comes with a 4" backplate that mounts to a standard junction box.

SPECIFICATION SHEET

ETL Intertek

Luminart®