

LIVVY™
RECESSED

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

LIVVY™ THIN

RECESSED

TYPE:

PROJECT NAME:



LIVVY is a slender tube with a cross-section in four sizes, housing an efficient LED diode. The glare effect in the entire Livvy family is minimized by recessing the light source into the body, which is enclosed by the black inner ring.

Color rendering: CRI 90

Installation: Ceiling, wall recessed

Materials: Aluminum body, steel ring

Ingress protection: IP20



Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Input [W] 7.8W

Lum. flux of light source [lm] 38° 270 lm

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold

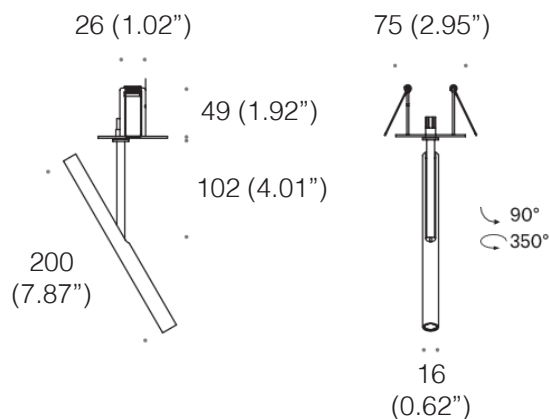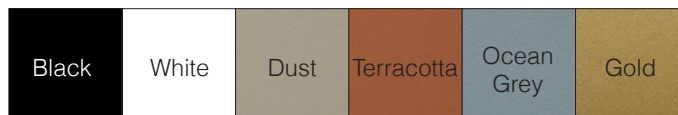

SPECIFICATION SHEET

ORDERING INFO

L544.3384	-	38	-	-
Model (Order Code)	Finish Options	Optic Options	LED	Remote Driver Options
<input type="radio"/> L544.3384 7.8W	<input type="radio"/> 12: Black <input type="radio"/> 13: White <input type="radio"/> 21: Terracotta <input type="radio"/> 22: Ocean Grey <input type="radio"/> 23: Dust <input type="radio"/> 80: Gold	<input type="radio"/> 38: 38°	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V



LIVVY™ SMALL

RECESSED

TYPE:

PROJECT NAME:



LIVVY is a slender tube with a cross-section in four sizes, housing an efficient LED diode. The glare effect in the entire Livvy family is minimized by recessing the light source into the body, which is enclosed by the black inner ring.

Color rendering: CRI 90

Installation: Ceiling, wall recessed

Materials: Aluminum body, steel ring

Ingress protection: IP20


Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Input [W] 6.5W

Lum. flux of light source [lm] 45° 283 lm

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold

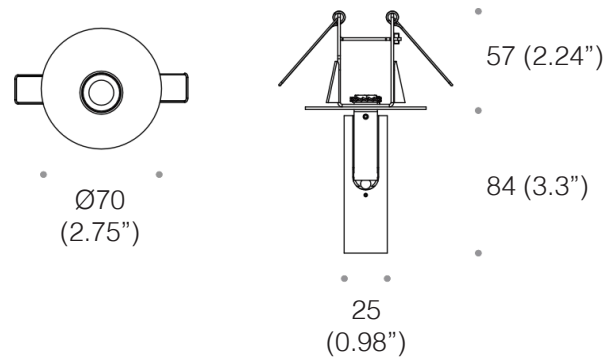

SPECIFICATION SHEET

ORDERING INFO

L545.3779	-	45	-	-
Model (Order Code)	Finish Options	Optic Options	LED	Remote Driver Options
<input type="radio"/> L545.3779 6.5W	<input type="radio"/> 12: Black <input type="radio"/> 13: White <input type="radio"/> 21: Terracotta <input type="radio"/> 22: Ocean Grey <input type="radio"/> 23: Dust <input type="radio"/> 80: Gold	<input type="radio"/> 45: 45°	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V



LIVVY™ MEDIUM

RECESSED

TYPE:

PROJECT NAME:



LIVVY is a slender tube with a cross-section in four sizes, housing an efficient LED diode. The glare effect in the entire Livvy family is minimized by recessing the light source into the body, which is enclosed by the black inner ring.

Color rendering: CRI 98

Installation: Ceiling, wall recessed

Materials: Aluminum body, steel ring

Ingress protection: IP20


Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Input [W] 8.8W

Lum. flux of light source [lm] 34° 557 lm

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold

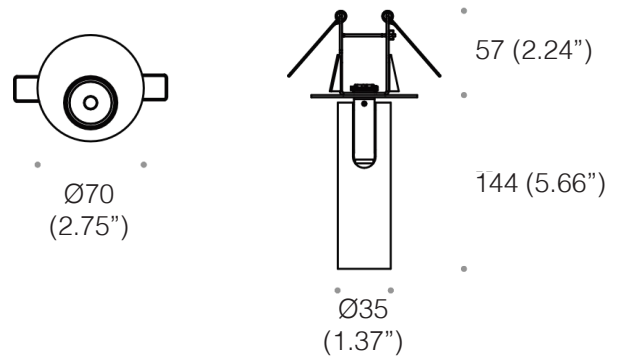

SPECIFICATION SHEET

ORDERING INFO

L545.3783	-	34	-	-
Model (Order Code)	Finish Options	Optic Options	LED	Remote Driver Options
<input type="radio"/> L545.3783 8.8W	<input type="radio"/> 12: Black <input type="radio"/> 13: White <input type="radio"/> 21: Terracotta <input type="radio"/> 22: Ocean Grey <input type="radio"/> 23: Dust <input type="radio"/> 80: Gold	<input type="radio"/> 34: 34°	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V





LIVVY™ LARGE

RECESSED

TYPE:

PROJECT NAME:

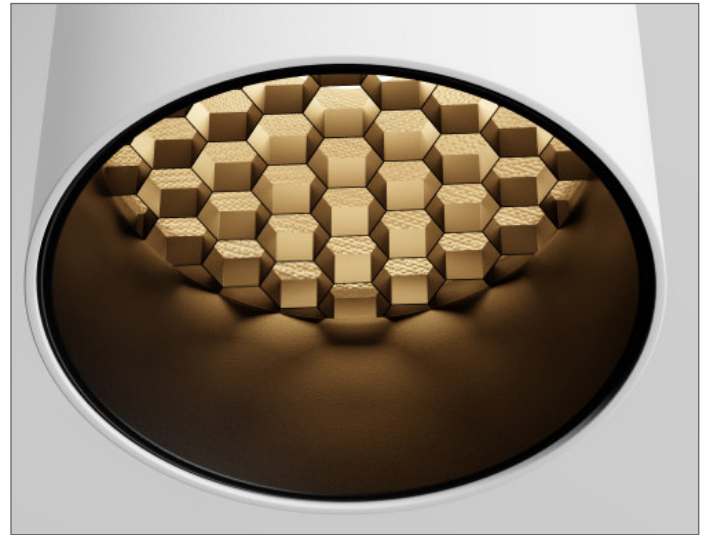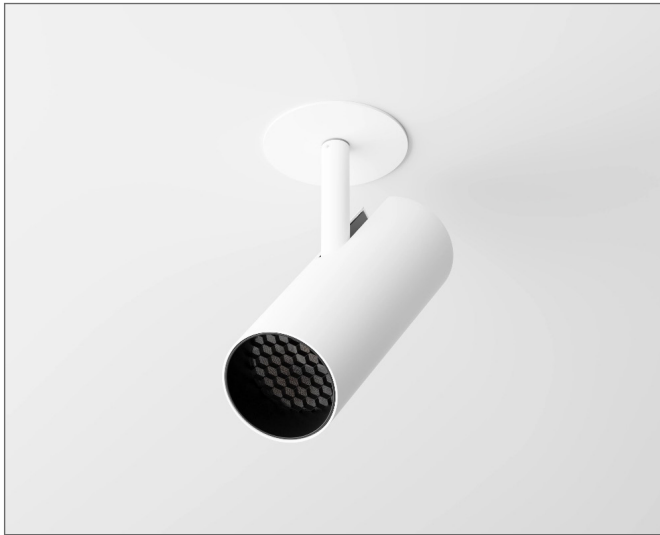

LIVVY is a slender tube with a cross-section in four sizes, housing an efficient LED diode. The glare effect in the entire Livvy family is minimized by recessing the light source into the body, which is enclosed by the black inner ring.

Color rendering: CRI 98

Installation: Ceiling, wall recessed

Materials: Aluminum body, steel ring


Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Input [W]	15W	
Lum. flux of light source [lm]	17°	1100 lm
	34°	1140 lm
	56°	1093 lm

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold

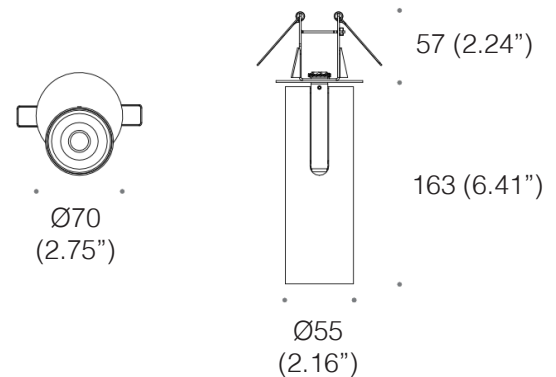

SPECIFICATION SHEET

ORDERING INFO

L545.3787

Model (Order Code)	Finish Options	Optic Options	LED	Remote Driver Options
<input type="radio"/> L545.3787 15W	<input type="radio"/> 12: Black <input type="radio"/> 13: White <input type="radio"/> 21: Terracotta <input type="radio"/> 22: Ocean Grey <input type="radio"/> 23: Dust <input type="radio"/> 80: Gold	<input type="radio"/> 17: 17° <input type="radio"/> 34: 34° <input type="radio"/> 56: 56°	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V

