

# MATRIX™ MICRO 1


RECESSED

TYPE:

PROJECT NAME:



Recessed square **IP40** downlight, for indoor false ceiling applications, ideal for the lighting of residential and commercial areas, shop windows, corridors, meeting rooms, offices.



**IP40**



kg 0,27



50x50 mm




Intertek

	SUPPLY	W	LM CRI>90	OPTICS	LED COLOR	CODE	+	FINISH
	120Vac	6	560	12°	2700 K	<b>L0121321</b>		<b>.02 .05 .08</b>
	120Vac	6	600	12°	3000 K	<b>L0121331</b>		<b>.02 .05 .08</b>
	120Vac	6	640	12°	4000 K	<b>L0121341</b>		<b>.02 .05 .08</b>
	120Vac	6	560	28°	2700 K	<b>L0121322</b>		<b>.02 .05 .08</b>
	120Vac	6	600	28°	3000 K	<b>L0121332</b>		<b>.02 .05 .08</b>
	120Vac	6	640	28°	4000 K	<b>L0121342</b>		<b>.02 .05 .08</b>
	120Vac	6	560	45°	2700 K	<b>L0121323</b>		<b>.02 .05 .08</b>
	120Vac	6	600	45°	3000 K	<b>L0121333</b>		<b>.02 .05 .08</b>
	120Vac	6	640	45°	4000 K	<b>L0121343</b>		<b>.02 .05 .08</b>

Power supply included

Finish Options

- .02** Matt white
- .05** Matt grey
- .08** Matt black

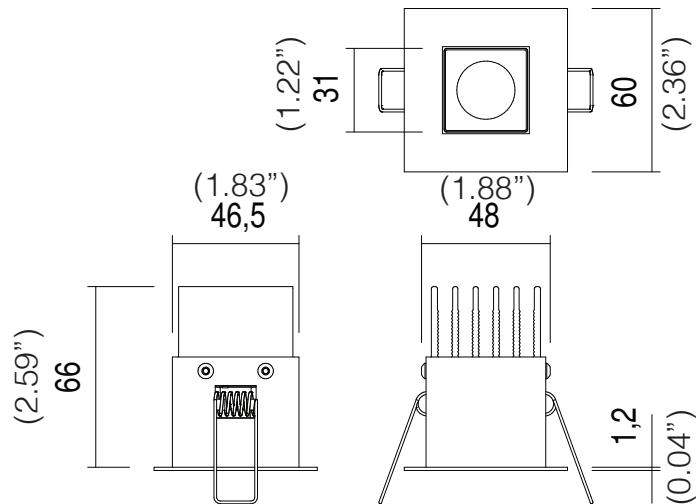

SPECIFICATION SHEET



WWW.LEDOLOGY.COM

A **Luminart** BRAND